

EVALUATION REPORT

FLORIDA BUILDING CODE, 6TH EDITION (2017)

Manufacturer:	OWENS CORNING 1 Owens Corning Pa Toledo, OH 43657 (800) 438-7465 www.owenscorning.		LT LLC Iss	sued September 30, 2017
Quality Assurance:	UL LLC (QUA9625)			
SCOPE				
Category: Subcategory: Code Sections: Properties:	Roofing Roofing Accessories that are an Integral Part of the Roofing System 1708.2 Roof Ventilation			
References				
Entity Architectural Testing, Inc (TST1558) Architectural Testing, Inc (TST1558) Architectural Testing, Inc (TST1558)		Report No. 01-38660.04 01-38660.05 C1774.01-109-18	<u>Standard</u> TAS 100(A) TAS 100(A) TAS 100(A) ASTM D 635 ASTM D 1929	<u>Year</u> 1995 1995 1995 2010 2012
PRI Construction Materials Technologies (TST5878)		AVIG-005-02-01	ASTM D 2843 ASTM D 635 ASTM D 1929 ASTM D 2843	2010 2010 2012 2010
PRI Construction Materials Technologies (TST5878) PRI Construction Materials Technologies (TST5878)		AVIG-006-02-01 OCF-111-02-01	ASTM G 155 ASTM D 635 ASTM D 635 ASTM D 1929 ASTM D 2843	2005a 2010 2012
PRI Construction Materials Technologies (TST5878) PRI Construction Materials Technologies (TST5878) PRI Construction Materials Technologies (TST5878) PRI Construction Materials Technologies (TST5878)		OCF-112-02-01 OCF-116-02-01 OCF-223-02-01 OHI-007-02-01	ASTM G 155 TAS 100(A) TAS 100(A) TAS 100(A)	2005a 1995 1995 1995


OCR14003.3

FL10758-R7



PRODUCT DESCRIPTION AND APPLICATION

VentSure[®] 4-Foot Strip Heat and Moisture Ridge Vents: 1-1/4" x 14-7/8" x 48" low-profile attic ridge vent consisting of a two-layer nylonpolyester composite. Available with or without a polyester fabric moisture barrier for installation in shingle roof systems.



Deck Type:

Roof deck shall be constructed of closely fitted sheathing for new or existing construction. Roof deck shall be designed and installed in accordance with FBC requirements.

Roof slope: Minimum 3:12 to maximum 16/12

Installation Height: Maximum 60-ft

Attachment Method: Cut a 2-inch opening (1-inch on each side of the ridge) centered in the deck at the ridge for ventilation. The slot shall terminate approximately 6-inches from the rake edges. Apply a ¼-inch wide bead of ASTM D 4586 roofing cement along the entire length of the outside edges of the vent to seal the vent to the field shingles, taking care to not completely cover the weep slots in the vent. Center the vent over the opening and fasten to the deck using the 11 ga. 2½-inch galvanized ring shank nails (shall comply with FBC Section 1506.5) provided with the vent. Fasteners are to be installed on both sides of the vent 1, 12, 24, 36, and 47-inches from the start of each vent piece.

Prepare the adjacent vent section by applying the roofing cement along the edges, snap together with fixed vent, and fasten to the deck in the same manner as the first section. Fasten the ridge shingles over the vent to the deck on the marked "shingle nail line" with two (2) minimum 11 ga. 2½-inch galvanized ring shank roofing nails (shall comply with FBC Section 1506.5) provided with the vent or as directed by the shingle manufacturer's installation instructions.

Allowable Roof Coverings: Asphalt shingles


OCR14003.3

FL10758-R7



VentSure[®] Low Profile Slant Back Roof Vent with Exterior Louver:

18" x 24" x 2-3/16" (32" x 23" flange base) static off-ridge vent composed of ASTM A653 galvanized steel (available with painted finish). Material shall conform with FBC Section 1507.4.3.

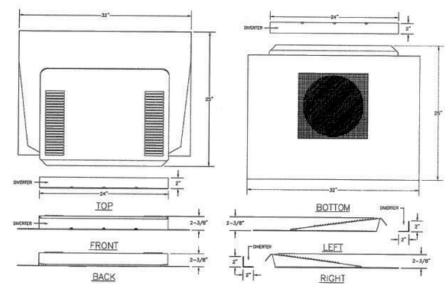

Deck Type:

Roof deck shall be constructed of closely fitted sheathing for new or existing construction. Roof deck shall be designed and installed in accordance with FBC requirements.

Roof slope: Minimum 3:12

Installation Height: Maximum 33-ft

Attachment Method: Cut an 11 x 11-inch hole through wood sheathing only approximately 18-inches from the ridge. Apply 1/4-inch thick by 3-inch wide bed of ASTM D 4586 roofing cement around inner and outer flange. Place vent directly over the hole, ensuring the vent sits flat on the roof. Fasten vent 4-inches o.c. and 1-inch from outside edge of flange with minimum 12 ga. ring shank roofing nails (shall comply with FBC Section 1506.5), ensuring ³/₈-inch penetration through wood deck (Minimum 18 nails per vent).

Install baffle in ¼-inch bed of ASTM D 4586 roofing cement and secure with minimum 12 ga. ring shank roofing nails (shall comply with FBC Section 1506.5) spaced 8-inches o.c. (total of (3) nails) while ensuring ¾-inch penetration through wood deck. Seal all nails and vent flange with ASTM D 4586 roofing cement.

Allowable Roof Coverings: Asphalt shingles


OCR14003.3

FL10758-R7

Page 3 of 5



VentSure[®] Rigid Roll Ridge Vent: 5/8" x 11-1/4" x 20' attic ridge vent composed of high density polypropylene with a spun-bond polypropylene fabric.



Deck Type:

Roof deck shall be constructed of closely fitted sheathing for new or existing construction. Roof deck shall be designed and installed in accordance with FBC requirements.

Roof slope: Minimum 2:12 to maximum 20:12

Installation Height: Maximum 60-ft

Attachment Method: Cut a 2-inch opening (1-inch on each side of the ridge) centered in the deck at the ridge for ventilation. The slot shall terminate approximately 12-inches from the rake edges. Apply a continuous bead of polyurethane adhesive sealant along the entire length of the outside edges of the vent to seal the vent to the field shingles. Center the vent over the opening and fasten the vent 24-inches o.c. to the deck using minimum 12 ga. ring shank roofing nails (shall comply with FBC Section 1506.5), ensuring ³/₆-inch penetration through wood deck.

Fasten the ridge shingles over the vent to the deck on the marked "shingle nail line" with two (2) minimum 12 ga. ring shank roofing nails (shall comply with FBC Section 1506.5) or as directed by the shingle manufacturer's installation instructions, ensuring $\frac{3}{10}$ -inch penetration through wood deck. Outside edges of the shingles shall be sealed with flashing cement.

Allowable Roof Coverings: Asphalt shingles

LIMITATIONS

- 1) Fire Classification is outside the scope of this evaluation.
- 2) This report is not for use in the HVHZ.
- 3) The roof deck and deck attachment shall be designed by others in accordance with the FBC.
- 4) All products listed in this report shall be manufactured under a quality assurance program in compliance with Rule 61G20-3.
- 5) Owens Corning vents shall be installed in strict compliance with this evaluation report and the manufacturer's published installation instructions. In the event of conflict, the more restrictive installation shall be enforced.
- 6) Deck substrates shall be clean, dry, and free from any irregularities and debris. All fasteners in the deck shall be checked for protrusion prior to installation.
- 7) Installation of the roof assembly is outside the scope of this evaluation.
- 8) Owens Corning vents are intended to provide passive ventilation for an enclosed attic in residential construction applications.


FL10758-R7

Page 4 of 5



COMPLIANCE STATEMENT

The products evaluated herein by Zachary R. Priest, P.E. have demonstrated compliance with the Florida Building Code, 6th Edition (2017) as evidenced in the referenced documents submitted by the named manufacturer.



Zachary R. Priest, P.E. Florida Registration No. 74021 Organization No. ANE9641

CERTIFICATION OF INDEPENDENCE

CREEK Technical Services, LLC does not have, nor will it acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

CREEK Technical Services, LLC is not owned, operated, or controlled by any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.

END OF REPORT

OCR14003.3

FL10758-R7

Page 5 of 5