

**EVALUATION REPORT OF
BEHLEN MFG. CO.
'ZL-24 PANEL'**


**FLORIDA BUILDING CODE 9TH EDITION (2026)
FLORIDA PRODUCT APPROVAL
FL 11424.1-R3
STRUCTURAL COMPONENTS
ROOF DECK**

**Prepared For:
Behlen Mfg. Co.
4025 E. 23rd Street
Columbus, NE 68602-0569
Telephone: (402) 564-3111**

**Prepared By:
Bala Sockalingam, Ph.D., P.E.
Florida Professional Engineer #62240
1216 N Lansing Ave., Suite C
Tulsa, OK 74106
Telephone: (918) 492-5992**

**This report consists of
Evaluation Report (3 Pages including cover)
Installation Details (2 Pages)
Load Span Tables (2 Pages)**

**Report No. C3078-1
Date: 10.5.2026**

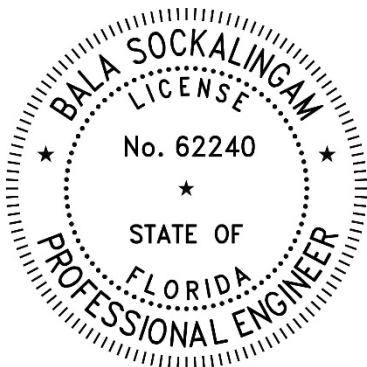

This item has been digitally signed and sealed by Bala Sockalingam, PE, on the date indicated.

Printed copies of this document are not considered signed and sealed and this signature must be verified on any electronic copies.


**2026.10.05
17:39:17
-05'00'**

Manufacturer:	Behlen Mfg. Co.
Product Name:	ZL-24
Panel Description:	Standing seam panel with 24" wide coverage and 3" high ribs
Materials:	Min 24 or 22 ga. with galvalume coated steel (ASTM A792) or painted steel (ASTM A755) ($F_y = 50$ ksi). Corrosion resistant as per FBC 2026 Section 1507.4.3.
Support Description:	Min 16 ga., 50 ksi steel section (Must be designed by others)
Slope:	1/4:12 or greater in accordance with FBC 2026 Section 1507.4.2
Design Uplift Pressure:	Allowable uplift loads are shown in the load span tables for 24 and 22 ga. panels with Roll-and-Lock, Triple-Lock and Quadri-Lock Seams fastened with MPS 600, FC 600 or BA Series clips. Maximum panel span is 5'. The allowable uplift loads were determined from ASTM E1592 testing and are applicable for the panel and panel to clip connection. Clip fastener, purlin, frames and support connections must be designed to resist all loads. The factors of safety were determined in accordance with FBC 2026 Section 1504.9, ASTM E1592 test standard and the procedures of Section I6.3.1, K2.1.1 and K2.1.2 of the AISI S100-16(2020) w/S2-20.
Panel Attachment:	MPS 600, FC 600 or BA Series clips with minimum (2) 1/4"-14 x 1-1/2" SDS per clip at each support. Clips and fasteners are corrosion resistant as per FBC 2026 Section 1506.7 and 1507.4.4, respectively. For installation in areas within 3000 ft. of a saltwater coastline, clips and fasteners are corrosion resistant as per FBC 2026 Section 1711.
Test Standards:	Roof assembly tested in accordance with ASTM E1592-98 or E1592-01 'Test Method for Structural Performance of Sheet Metal Roof and panel span Siding Systems by Uniform Static Air Pressure Difference' and FM 4470 Section 5.5 'Resistance to Foot Traffic'.
Test Equivalency:	The test procedures in ASTM E1592-98 or E1592-01 comply with test procedures prescribed in ASTM E1592-05(2017). The test procedure in FM 4470 (1992) complies with test procedure prescribed in FM 4470 (2022) Section 4.6 'Resistance to Foot Traffic'.
Code Compliance:	The product described herein has demonstrated compliance with FBC 2026 Section 1507.4.


Product Limitations: Design wind loads shall be determined for each project in accordance with FBC 2026 Section 1609 or ASCE 7-22 using allowable stress design. The maximum panel span listed herein shall not be exceeded. The design uplift pressure for reduced panel span may be computed using rational analysis prepared by a Florida Professional Engineer or based on Behlen's load span tables. This evaluation report is not applicable in High Velocity Hurricane Zone. Fire classification is not within scope of this Evaluation Report. Refer to FBC 2026 Section 1505 and current approved roofing materials directory or ASTM E108/UL790 report from an accredited laboratory for fire ratings of this product.

Supporting Documents: ASTM E1592 Test Reports
ENCON Technology Inc.
Project No. C596, Reporting Date 10/28/1998
Project No. C739, Reporting Date 7/28/1999
Project No. C1417-1, Reporting Date 1/20/2006
Project No. C1417-2, Reporting Date 1/23/2006
Project No. C1417-4, Reporting Date 1/25/2006
Project No. C1672-1, -2 & -3, Reporting Date 4/12/2002, Revised Date 9/29/2009
Project No. C2344-1, Reporting Date 6/12/2020


FM 4470 Test Report
ENCON Technology Inc.
C1669-1, Reporting Date 9/30/2009
(Behlen Mfg. Co. is authorized to use Building Research System's Test Reports)

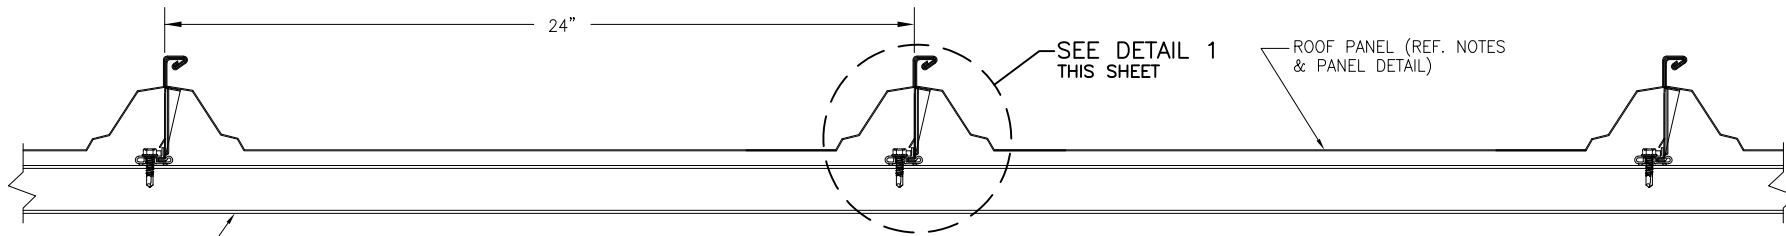


TYPICAL PANEL INSTALLATION X-SECTION

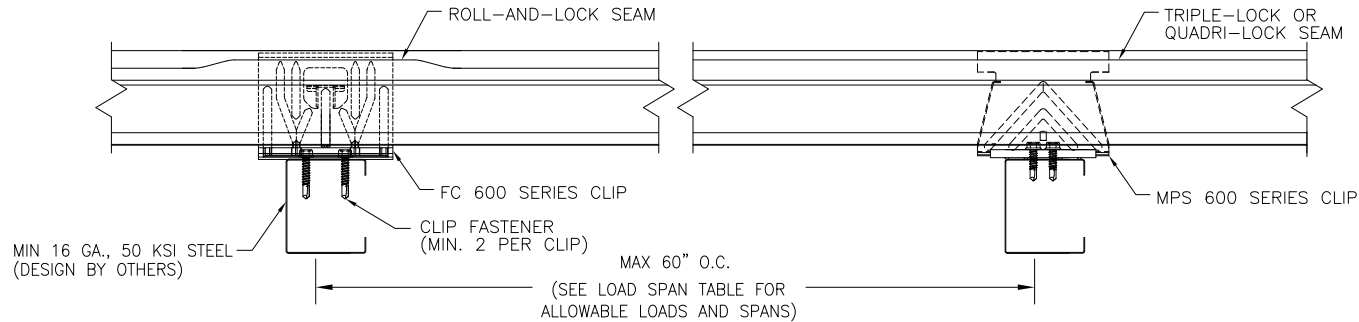

TYPICAL SIDE VIEW

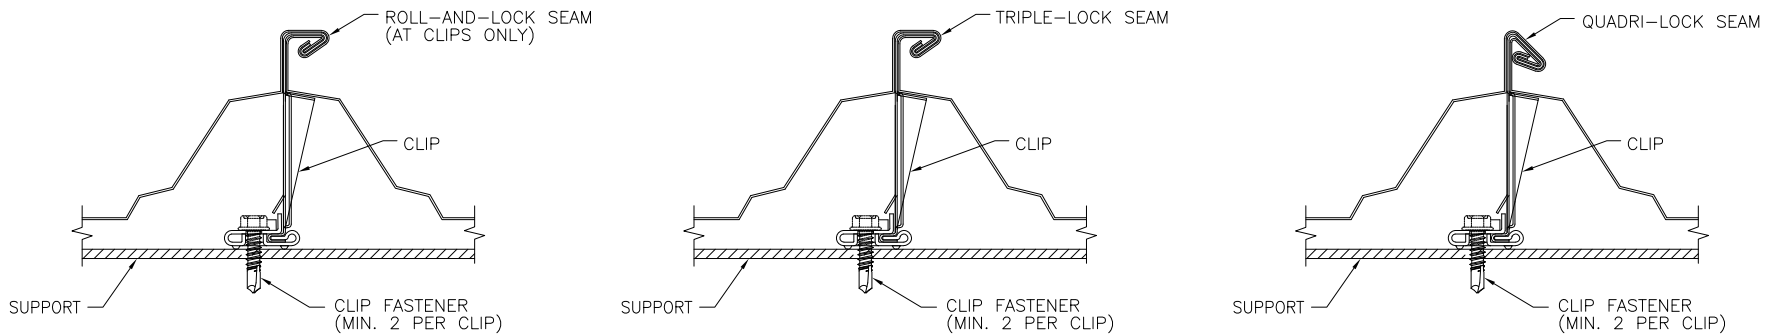

**CLIP SECTION VIEW
DETAIL 1**

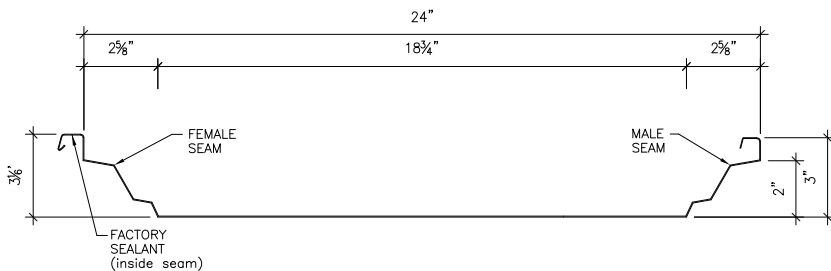


**PANEL SECTION
(MIN 24 GA.)**

GENERAL NOTES:


1. STRUCTURAL ROOF PANEL HAS BEEN DESIGNED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE (FBC).
2. ROOF PANELS SHALL BE 24 GA. ($t = 0.022$ ") OR 22 GA. ($T = 0.0285$ "). EFFECTIVE COVERING WIDTH OF PANEL = 24".
3. ROOF PANELS SHALL BE INSTALLED OVER STRUCTURE AS SPECIFIED ON THESE DRAWINGS.
4. REQUIRED DESIGN WIND LOADS SHALL BE DETERMINED FOR EACH PROJECT. THIS PANEL SYSTEM MAY NOT BE INSTALLED WHEN THE REQUIRED DESIGN WIND LOADS ARE GREATER THAN THE ALLOWABLE DESIGN LOADS.
5. CLIPS AND FASTENERS MUST BE IN ACCORDANCE WITH THESE DRAWINGS & FLORIDA BUILDING CODE. IF A DIFFERENCE OCCURS BETWEEN THE MINIMUM REQUIREMENTS OF THESE DRAWINGS & THE CODE, THE CODE SHALL CONTROL.
6. SUPPORTS MUST BE DESIGNED TO WITHSTAND WIND LOADS AS REQUIRED FOR EACH APPLICATION AND ARE THE RESPONSIBILITY OF OTHERS.

DRAWN BY: B.S.	CHECKED BY: W.Y.
PLOT:	DATE: 3/9/2021
NO.	DATE
BY	
REVISION DESCRIPTION	
NO.	
DRAWING TITLE ZL-24 STANDING SEAM ROOF PANEL	MANUFACTURER BEHLEN MFG. CO. 4025 E. 23RD STREET COLUMBUS, NE 68602-0569 402-564-3111
CONSULTANTS BALA SOCKALINGAM, PH.D., P.E. 1216 N. LANSING AVE. SUITE C TULSA, OK 74106 PHONE: 918-492-5992	
DRAWING NO. 3078-1	REV.
PAGE NO. 1	OF 2



SEE DETAIL 2
THIS SHEET

- ROOF PANEL (REF. NOTES
& PANEL DETAIL)



CLIP FASTENER
(MIN. 2 PER CLIP)

MAX 60" O.C.
LOAD SPAN TABLE FOR
LE LOADS AND SPANS)

TRIPLE-LOCK OR
QUADRI-LOCK SEAM

- BA CLIP WITH 8", 12" OR 16" CLIP TAB



SUPPORT

CLIP FASTENER
(MIN. 2 PER CLIP)

DRAWING NO.		REV.	
3078-1			
PAGE NO.			
2		OF 2	

DRAWING TITLE		ZL-24 STANDING SEAM ROOF PANEL	
CONSULTANTS		MANUFACTURER	
BALA SOCKALINGAM, PH.D., P.E.		BEHLEN MFG. CO.	
1216 N LANSING AVE. SUITE C		4025 E. 23RD STREET	
TULSA, OK 74106		COLUMBUS, NE 68602-0569	
PHONE: 918-492-5992		402-564-3111	

DRAWN BY:		CHECKED BY:	
B.S.		W.Y.	
PLOT:		DATE:	
		3/9/2021	
NO.	REVISION DESCRIPTION	BY	DATE

BEHLEN MFG CO
ZL-24 Panel Uplift Loads
With MPS or FC 600 Series Clips

Seam	Span (ft)	Allowable Uplift Load (psf)	
		24 ga.	22 ga.
Roll-and-Lock	2	61.1	
	2.5	55.6	57.2
	3	47.2	56.3
	3.5	40.4	48.3
	4	35.4	42.3
	4.5	31.4	37.6
	5	28.3	33.8
Triple-Lock	2	85.5	
	2.5	78.4	59.8
	3	71.3	55.6
	3.5	61.1	51.5
	4	53.5	47.3
	4.5	47.6	43.2
	5	42.8	39.0
Quadri-Lock	2	108.8	
	2.5	99.7	
	3	89.8	
	3.5	77.0	
	4	67.4	
	4.5	59.9	
	5	53.9	

Notes:

1. The allowable uplift loads were determined from ASTM E1592 testing and are applicable for the panel and panel to clip connection. Clip fastener, purlin, frames and support connections must be designed to resist all loads imposed on the panel.
2. The factor of safety was determined in accordance with the procedures of Section I6.3.1, K2.1.1 and K2.1.2 of the AISI S100-16(2020) w/S2-20.
3. The factor of safety for 24 ga. ZL-24 panels varied between 1.702 and 1.715.
4. The factor of safety for 22 ga. ZL-24 panels was 2.0.
5. Panels must be installed as per Evaluation Report FL 11424.1 and Behlen Mfg. Co. current installation procedure.
6. MPS 600 Series Clip: MPS 602, 603, 607, 608, 609. FC 600 Series Clip: FC 602, 603, 607, 608, 609.
7. Three or more spans condition.

BEHLEN MFG CO
Minimum 24 Ga. ZL-24 Panel Uplift Loads
With BA Series Clips

Seam	Span (ft)	Allowable Uplift Load (psf)		
		BA-602-8 or BA-603-8	BA-602-12 or BA-603-12	BA-602-16 or BA-603-16
Triple-Lock	2	106.0	127.8	149.7
	2.5	97.0	116.8	136.6
	3	86.4	102.6	118.7
	3.5	74.1	87.9	101.7
	4	64.8	76.9	89.0
	4.5	57.6	68.4	79.1
	5	51.9	61.5	71.2
Quadri-Lock	2	144.8	183.3	
	2.5	132.2	166.8	
	3	114.4	140.7	
	3.5	98.1	120.6	
	4	85.8	105.5	
	4.5	76.3	93.8	
	5	68.7	84.4	

Notes:

1. The allowable uplift loads were determined from ASTM E1592 testing and are applicable for the panel and panel to clip connection. Clip fastener, purlin, frames and support connections must be designed to resist all loads imposed on the panel.
2. The factor of safety was determined in accordance with the procedures of Section I6.3.1, K2.1.1 and K2.1.2 of the AISI S100-16(2020) w/S2-20.
3. The factor of safety for 24 ga. ZL-24 panels varied between 1.702 and 1.709.
4. Panels must be installed as per Evaluation Report FL 11424.1 and Behlen Mfg. Co. current installation procedure.
5. The clip tab width for the following clips are as follows:
BA-602-8 or BA-603-8: 8"
BA-602-12 or BA-603-12: 12"
BA-602-16 or BA-603-16: 16"
6. Three or more spans condition.