



WALTER A. TILLIT, JR., P.E.

tilteco@aol.com
FL P.E. License No. 44167
FL E.B. License No. 0006719

PRODUCT EVALUATION REPORT

REPORT NO.: 17-0725.03

DATE: July 25, 2017

PRODUCT CATEGORY: Hurricane Shutters

PRODUCT SUB-CATEGORY: Storm Panel

PRODUCT NAME: 24 Gage Bertha Galvanized Steel Storm Panel

SUBMITTED BY: Eastern Metal Supply Inc.
4268 Westroads Drive
West Palm Beach, Florida 33407

1. PURPOSE OF EVALUATION:

This is a Product Evaluation Report issued by **Walter A. Tillit, Jr., P.E.** (System ID # 1906) to the **Eastern Metal Supply Inc., Rule Chapter No. 61G20-3, Method 1D of the Florida Department of Business and Professional Regulation.**


This product is being issued an Evaluation Report as described herein, and has been verified for compliance in accordance with the 2017 Sixth Edition of the Florida Building Code, and to verify that the product is for the purpose intended at least equivalent to that required by the Code.

This Product Evaluation Report shall be subject to review and revision in case of a Building Code change that may affect its limitations and conditions.

2. EVIDENCE SUBMITTED:

2.1. PRODUCT EVALUATION DOCUMENT (P.E.D.):

Drawing No. 17-089 (Revises Drawing # 15-041), titled "24 Gage Bertha Galvanized Steel Storm panel (2" Deep)", sheets 1 thru 10 of 10, prepared by Tilteco, Inc.; signed and sealed by Walter A. Tillit, Jr., P.E. dated 07/25/17.
This drawing is an integral part of this Evaluation Report.

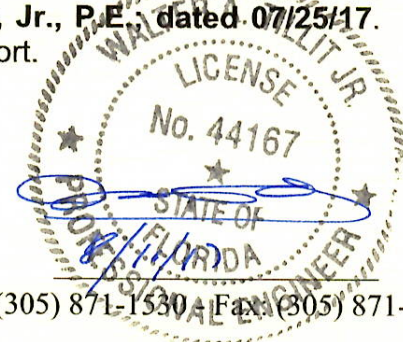

PRODUCT EVALUATION REPORT NO. 17-0725.03**2.2. TEST REPORTS:**

Large missile impact and cyclic load test were performed under ASTM E-1886, E-1996 standard as per section 1609.1.2 of the Florida building Code. Uniform Static Load Tests as per Section 1709.5.2, ASTM E-330. Test reports prepared by American Testing Lab of South Florida, Report No. 0304.01-08, dated May 12, 2008, and signed and sealed by William R. Mehner, P.E. and Henry Hattem P.E., Report No 1220.01-5, dated July 16, 2007, signed and sealed by William R. Mehner, P.E., and Henry Hattem, P.E., Report No 0926.01-03, dated January 15, 2004, signed and sealed by William R. Mehner, P.E. and Henry Hattem, P.E.

Tensile test reports # 8CM-256, by QC Metallurgical Inc. Laboratory, dated March 21, 2008 signed and sealed by Frank E. Grate, Jr. P.E., as per ASTM E 8.

2.3. STRUCTURAL ENGINEERING CALCULATIONS:

This revision includes new calculations to verify the moment of inertia of storm panel where its end lips include now hemmed edges. Comparison is made in relation to panel with non-hemmed edges.


On **24 Gage Bertha Galvanized Steel Storm Panel (2" Deep)** for maximum panel length vs. design wind load, as well as maximum anchor spacing vs. design wind load and panel length based on rational and comparative analysis, and in accordance with sections **1604** of the Florida Building Code. Calculations prepared by Tilteco, Inc., dated May 12, 2008, signed and sealed by Walter A. Tillit, Jr., P.E.

3. MISSILE IMPACT RESISTANCE:

Based on new calculations explained on item 2.3 above, we have concluded that storm panels with hemmed edges comply also with large missile impact under section 1609.1.2 of the Florida Building Code, as per ASTM E-1886, E-1996 Standard. Large missile impact under section 1609.1.2 of the Florida Building Code, as per ASTM E-1886, E-1996 Standards, with missile level "D" (basic protection).

4. WIND LOADS RESISTANCE:

24 Gage Bertha Galvanized Steel Storm Panel (2" Deep) has been verified to sustain wind pressures. Maximum panel length shall be as indicated on sheet 2 of 10 of Product Evaluation Document (P.E.D.), **Drawing # 17-089**. Maximum Anchor Spacing shall be as indicated on sheets 6, 7 and 10 of 10 of Product Evaluation Document (P.E.D.), **Drawing No. 17-089**. **24 Gage Bertha Galvanized Steel Storm Panel (2" Deep)** has been verified, for code compliance to work as a non-porous storm shutter assembly, as per ASTM E-1996 Standard.

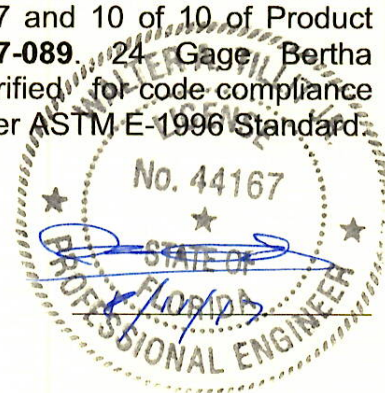

PRODUCT EVALUATION REPORT NO. 17-0725.03

5. INSTALLATION:

Installation shall be performed strictly in accordance with the details indicated on sheets 4 thru 6 and 8 and 9 of 10 of Product Evaluation Document (P.E.D.), **drawing No. 17-089**. Minimum separation to glass shall be as indicated on sheets 4 thru 6, 8 and 9 of 10 of Product Evaluation Document (P.E.D.), **drawing 17-089**.

6. MATERIAL CHARACTERISTICS AND SPECIFICATIONS:

Shall be strictly in accordance with General Notes and Components indicated on sheets 1, 2 and 3 of 10, of Product Evaluation Document (P.E.D.), **drawing No. 17-089**.

Anchor specifications shall be as indicated on sheets 1, 5, 6, 8 and 9 of 10 of Product Evaluation Document (P.E.D.), **drawing No. 17-089**.

7. LIMITATIONS AND CONDITIONS OF USE:

7.1. Shall be strictly in compliance with General Notes No. 1 and 7 thru 12, indicated on sheet 1 of 10, of Product Evaluation Document (P.E.D.), **drawing No. 17-089** prepared by Tilteco, Inc. and signed and sealed by Walter A. Tillit, Jr., P.E.

7.2. Product **shall not** be installed within HIGH VELOCITY HURRICANE ZONES as defined on section **1620.2** of the Florida Building Code.

7.3. Product shall only be installed into poured concrete, concrete block and wood frame structures.

Product Evaluation Report prepared by Walter A. Tillit, Jr., P.E. (Florida License No. 44167), President of Tilteco, Inc. (Florida EB-0006719).

