



Clad Pivot Door In-Swing
62 1/16" x 121 1/2" Frame Size
Installation/Non-Impact

TEST REPORT SUMMARY:	
- MAXIMUM BASIC UNIT FRAME SIZE:	
62 1/16" (1576mm) x 121 1/2" (3086mm)	
- OVERALL DESIGN PRESSURE: ± 45.11 psf	
- STRUCTURAL TEST PRESSURE: ± 67.67 psf	
- RATING: CW-PG45	


CCL Listing # 429-H-564.02-.04	Intertek/ATI Test Report #: M6012.01-901-44		
Aluminum Clad Pivot Door			
Aluminum Nail Fin Installation / WDMA Instructions / Non-Impact			
SHEET: 1 OF 2	FL41862	Updated: 1/04/2023	DRAWN BY: K.E.

INSTALLATION NOTES:


- USE 2" x _ PINE FOR ROUGH OPENING
- PLACE WOOD SHIMS EVERY 6-10" AT HEAD & SIDE JAMB
- 3/4" MAXIMUM SHIM SPACE AT HEAD AND 1/2" EACH JAMB
- APPLY A CONTINUOUS BEAD OF SEALANT BEHIND THE HEAD & SIDE JAMB NAIL FIN.
- INSTALL #8 X 1 1/2" PPH SCREWS SPACED APPROXIMATELY 4" FROM EACH CORNER AND 12" ON CENTER THEREAFTER, THROUGH THE NAIL FIN INTO THE FRAMING MATERIAL, AT HEAD AND SIDE JAMBS 3/8" MINIMUM EDGE DISTANCE. INSTALL #8 X 3" SCREW THROUGH THE CEILING PLATE INTO THE HEADER 12 5/16" FROM THE INSIDE OF THE HINGED END OF THE FRAME.
- SILICONE SEAL OVER SCREW HEADS FULLY SEAL ALL GAPS AT EACH CORNER OF THE UNIT AND THE ROUGH OPENING
- APPLY A CONTINUOUS CAP BEAD OF SEALANT AROUND THE FULL PERIMETER EDGE OF THE NAIL FIN
- 1" MINIMUM FASTENER EMBEDMENT INTO ROUGH FRAMING MATERIAL
- MAXIMUM DOOR SIZE: B.U.S. (Basic Unit Size) =
62 1/16" (1576mm) x 121 1/2" (3086mm)

- GENERAL INSTALLATION NOTES:**
- Check rough opening for proper size, plumb, level and square.
 - Make all necessary adjustments to ensure rough opening is plumb, level & square.
 - Sill must be flat, level and capable of supporting the weight of the unit.
 - Opening must allow a maximum of 3/4" shim space at head and 1/2" at side jambs.
 - Consult full installation instructions found on the Sierra Pacific web site, www.sierrapacificwindows.com, for all recommended installation procedures.
 - Wood buck, framing, fasteners, sealant and all wall system materials are provided **by others**

- FLASHING**
- For units that have to meet a specific DP (Design Pressure) rating, any kind of building wrap must be folded and taped away from each rough opening before the unit is installed. Unit must come in contact with the building's bare sheathing. A bead of silicone must be applied to the backside of the nail fin where it meets the unit, at head and jambs.
 - Once unit is installed and flashed properly, the building wrap must be reapplied and trimmed flush with the unit's exterior. A bead of sealant must be placed along the seam joint of the building wrap and the unit. Tape the corner cuts in the building wrap. See full window installation brochure for complete flashing details.

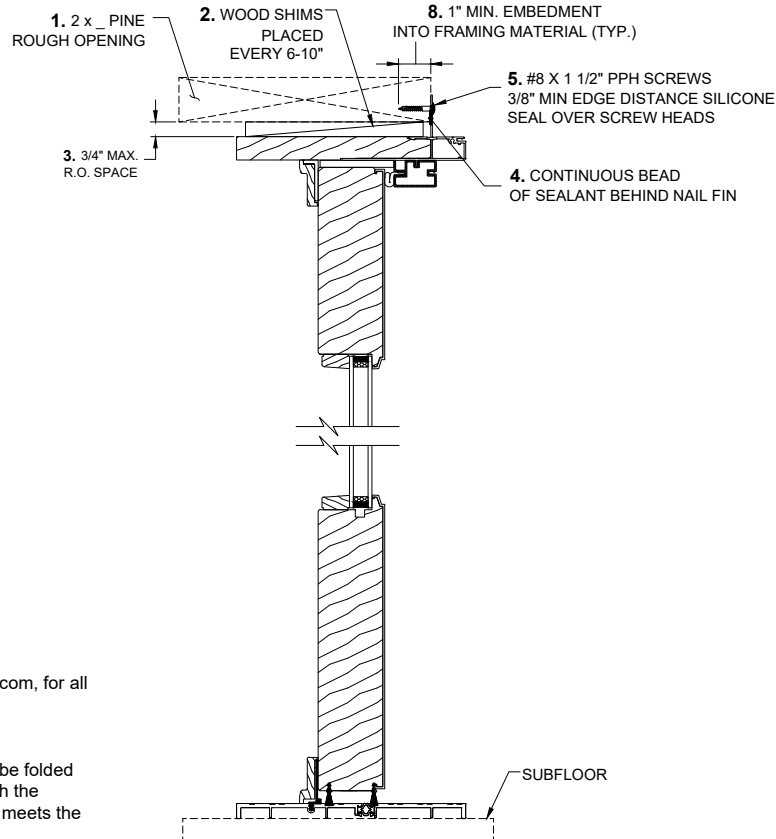

VERTICAL SECTION

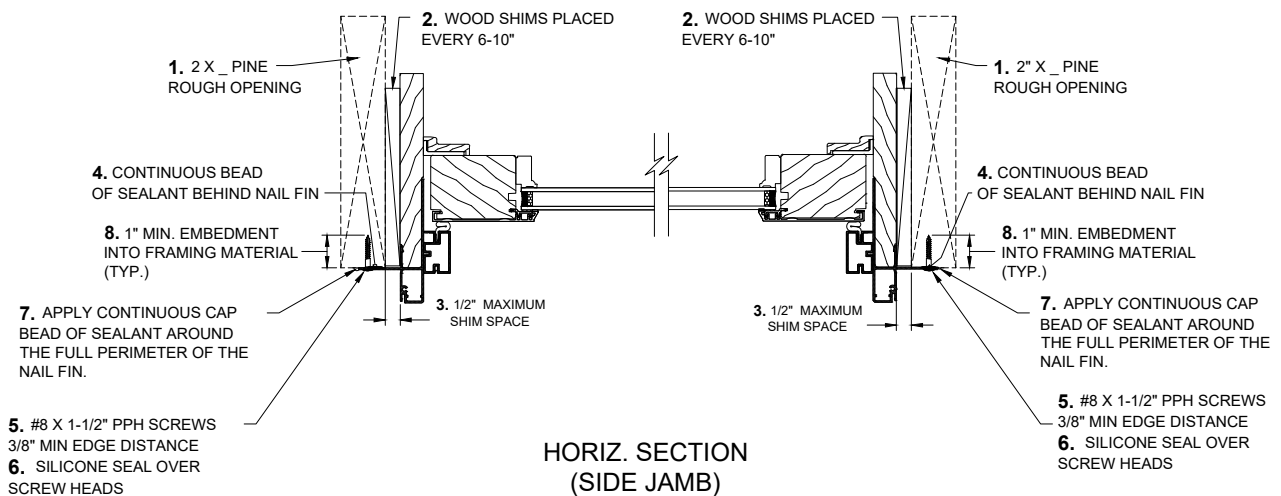

HORIZ. SECTION
(SIDE JAMB)



Clad Pivot Door In-Swing
62 1/16" x 121 1/2" Frame Size
Installation/Non-Impact

TEST REPORT SUMMARY:

- MAXIMUM BASIC UNIT FRAME SIZE:
62 1/16" (1576mm) x 121 1/2" (3086mm)
- OVERALL DESIGN PRESSURE: ± 45.11 psf
- STRUCTURAL TEST PRESSURE: ± 67.67 psf
- RATING: CW-PG45

CCL Listing # 429-H-564.02-.04

Intertek/ATI Test Report #: M6012.01-901-44

Aluminum Clad Pivot Door

Aluminum Nail Fin Installation / WDMA Instructions / Non-Impact

SHEET: 2 OF 2

FL41862

Updated: 1/04/2023

DRAWN BY: K.E.

**ELEVATION SHOWING
FASTENER LOCATION & SPACING**

