



BRICKMOULD/FLAT CASING INSTALLATION METHOD FOR SINGLE HUNG WINDOWS

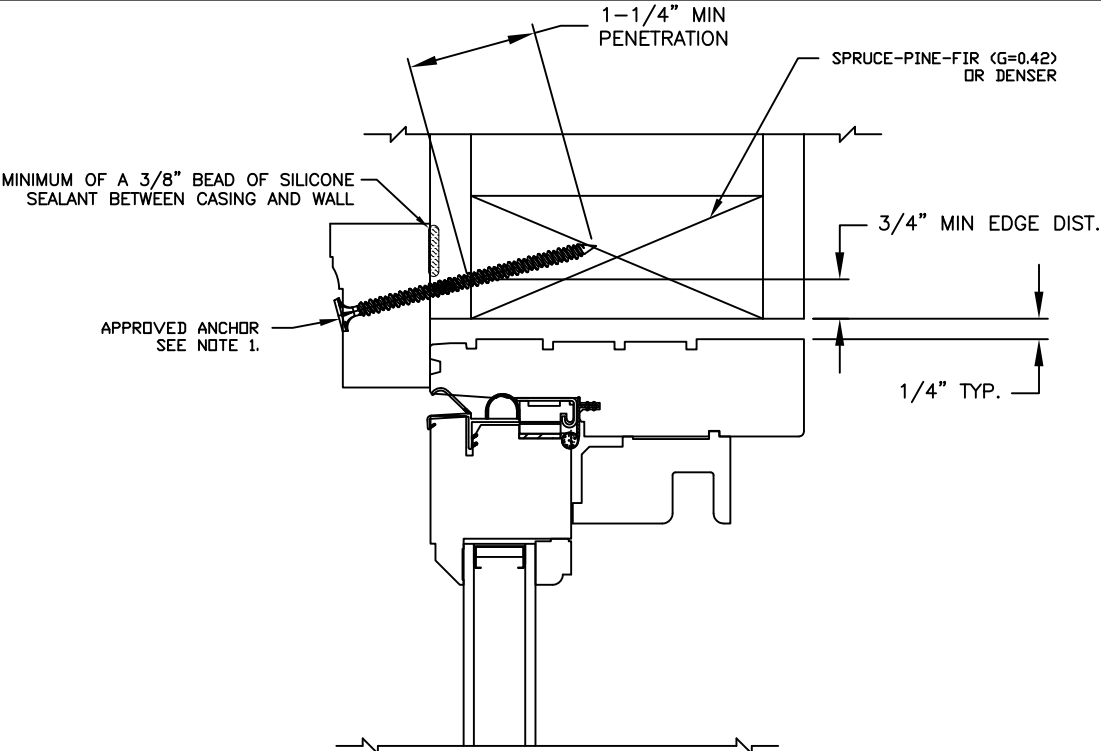


TYPICAL BRICKMOULD/FLAT CASING WINDOW HEAD JAMB

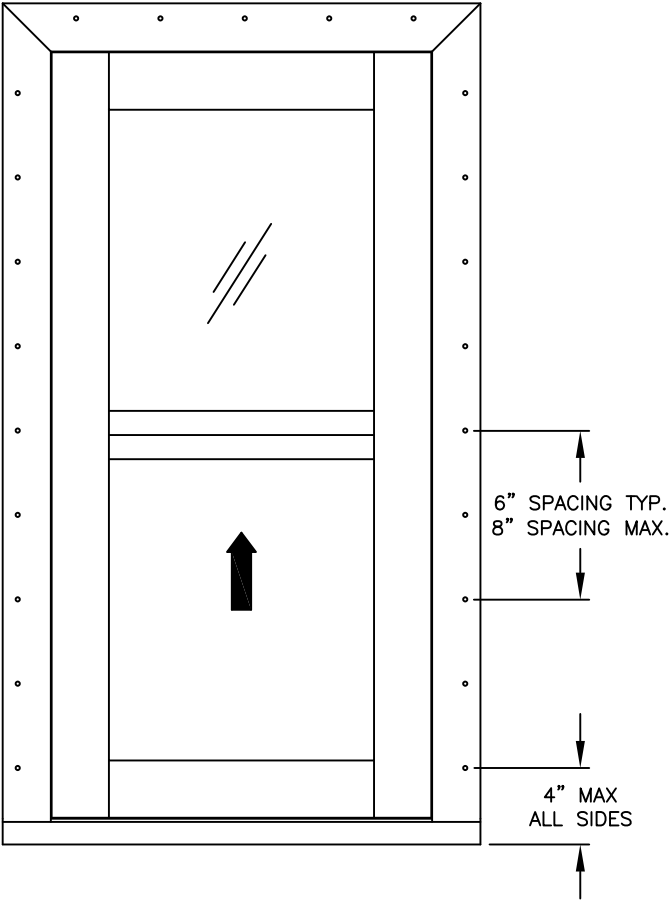


NOTES:

- Approved anchors are:  
  
#6 x 3" Wood Screw conforming to ANSI/ASME B18.6.1 and NDS-2018.  
  
Anchor length shall be sufficient to provide 1-1/4" penetration into wood buck. Fastener edge distance shall be at least 3/4".
- All anchors securing window to pressure treated bucks or wood framing shall be capable of resisting corrosion caused by the pressure treating chemicals in the wood.
- Maximum shim space shall be 1/4".
- Wood framing or buck shall be 2x S-P-F (G=0.42) or denser.
- Tapered or partial bucks are not allowed.
- Wood buck shall be secured to structure to resist all design loads.
- A continuous bead of silicone sealant must be applied around the perimeter of the rough opening between the back of the brickmould/casing and the wood buck.
- Non-impact products installed in Wind-Borne Debris Regions require approved impact resistant covering.
- Products are not approved for use in the High Velocity Hurricane Zone (HVHZ).
- This installation verified for all sizes and design pressures in FL4571. See product approval documentation for actual size and design pressures associated with this product.


This drawing depicts the details necessary to meet the structural load requirements. It does not address the air infiltration, water penetration/intrusion or thermal performance requirements of the installation. See installation instructions provided with the window unit.

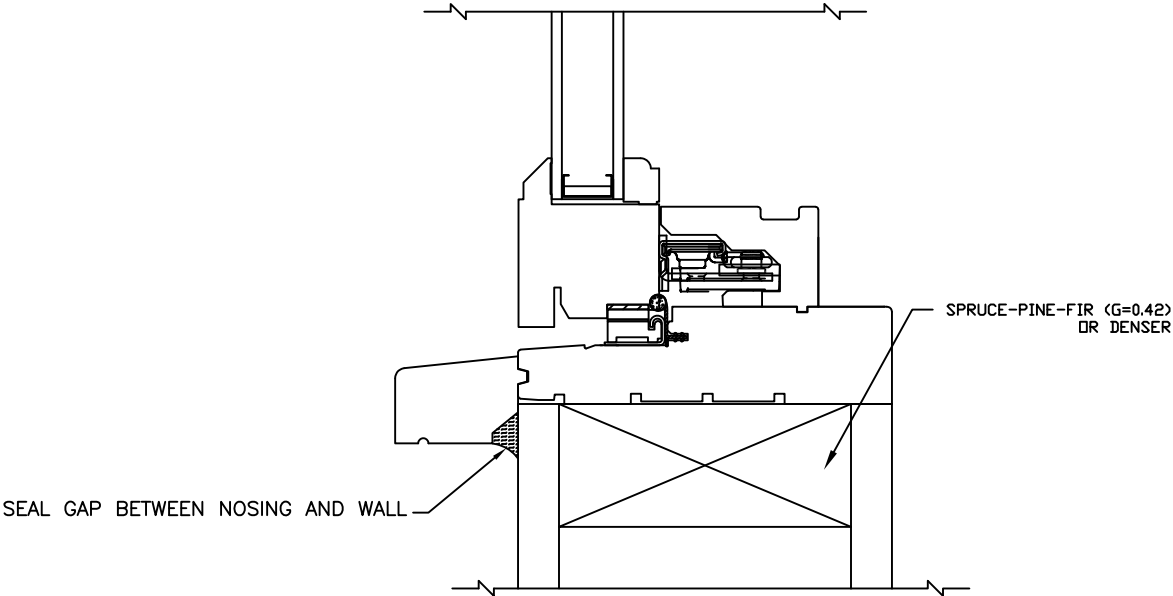

TYPICAL BRICKMOULD/FLAT CASING WINDOW SILL

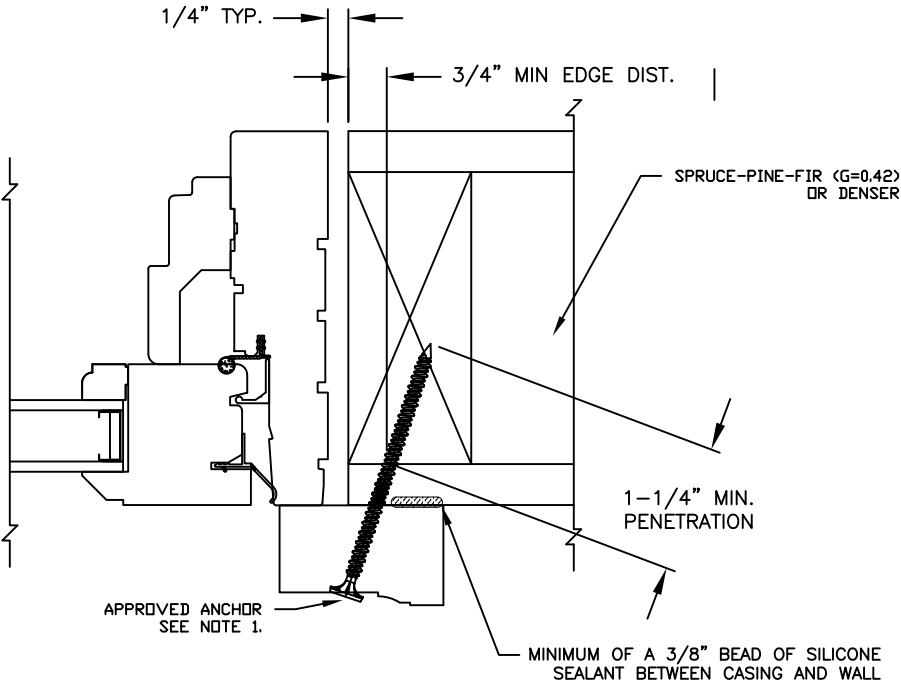

TYPICAL BRICKMOULD/FLAT CASING WINDOW SIDE JAMB



*Joseph A. Reed*

2020.10.07 13:58:26 -04'00'

JOSEPH A. REED, PE  
FL PE 58920  
NAT'L CERT'D TESTING LABS  
FL REG 33474  
5 LEIGH DRIVE  
YORK, PA 17406  
717-846-1200  
PROJECT 23713-1

The information contained herein is PROPRIETARY to and considered a trade secret of Lincoln Wood Products, Inc., a Merrill, WI based firm, and shall not be reproduced in whole or in part without the written authorization of LINCOLN WOOD PRODUCTS INC.

| TOLERANCES<br>(UNLESS NOTED) | REVISIONS |  | DATE | BY | Lincoln Windows                                     |                   |                                |
|------------------------------|-----------|--|------|----|-----------------------------------------------------|-------------------|--------------------------------|
|                              | 1.        |  |      |    | 701 N. State St.                                    | Merrill, WI 54452 | (715) 536-2461                 |
|                              | 2.        |  |      |    | ITEM:<br>BRICKMOULD/FLAT CASING WINDOW INSTALLATION |                   |                                |
|                              | 3.        |  |      |    | DRAWN BY: JJK                                       | SCALE: NONE       | DATE: 7/18/08                  |
|                              | 4.        |  |      |    | DIRECTORY:                                          | DWG. NAME:        | BRICKMOULD WINDOW INSTALLATION |