

STRUCTURAL SOLUTIONS, P.A.*

Structural Engineering ■ Investigations ■ Consulting

GARAGE DOOR STATIC PRESSURE TEST REPORT

Garage Door No.:	IBC-2764-104-26		Test Date:	3/26/2015	Project No.:	15-035
Design Pressures:	+14.7 psf, -16.5 psf		Report Date:	10/23/2020	Model #	2700/3550
Test Pressures:	+22.1 psf, -24.8 psf		Test Location:	Entrematic, Winston-Salem, NC		
ASCE 7-16 Criteria:	Up to 5 Feet of Door Width in Zone 5; Roof Slope ≤ 10°; Enclosed Building					
	Exp. B, 30' MRH	Exp. C, 15' MRH	Exp. C, 25' MRH	Exp. D, 15' MRH	Exp. D, 25' MRH	
	136 mph	123 mph	117 mph	112 mph	107 mph	
Witnessed By:	Brandon Gentle - Entrematic / Amarr; Thomas L. Shelmerdine, PE - Structural Solutions, P.A.					

Description of Test Specimen:

A 24'-2" wide x 8'-0" high steel sectional garage door, one section wide by four sections high, each section being 2" thick by 24" high. The top & bottom sections were 27 gauge galvanized steel sheet. The intermediate sections were 0.050" thick aluminum. Each steel section was reinforced with one 5-1/2" 18 gauge galvanized steel R-Truss. Each aluminum section was reinforced with one 4-1/2" 20 gauge galvanized steel R-Truss. The door sections were connected together with two 11 gauge galvanized steel end hinge at each end stile and one 11 gauge galvanized steel center hinge at 5 interior stiles as shown on the drawing. Amarr Model 2700/3550 manufactured by Entrematic was used in the test. The test unit is further described on Drawing IBC-2764-104-26.

Manner of Testing:

This test was conducted at Entrematic, 165 Carriage Ct., Winston-Salem, NC, which is accredited by the American Association for Laboratory Accreditation, Certificate #2595.01. The specimen was tested for static pressure structural performance in substantial conformance with the procedures described in DASMA 108-05 and ASTM E330-14. Both positive and negative pressures were tested. The specimen was installed in an enclosure framed with welded structural steel and covered with 3/4" thick plywood. The door was covered with 2 mil plastic sheeting to prevent leakage of air pressure. One pressure blower was attached to the enclosure with flexible ducting to provide the positive and negative pressures. Pressure transducers connected to a computer were used to measure and record the pressures in the enclosure.

Test Procedure:

The specimen was subjected to the above pressures for the following durations. Positive pressure was applied on the exterior face of the door first, and then negative pressure was applied.

Step 1: Preload the door to 50% of the Design Pressure and hold for 10 seconds. Step 2: Unload the door for 1 to 5 minutes. Step 3: Load the door to 100% of the Design Pressure and hold for 60 seconds. Step 4: Unload the door for 1 to 5 minutes. Step 5: Load the door to 150% of the Design Pressure (which equals 100% of the Test Pressure) and hold for 10 seconds. Step 6: Repeat 1 through 5 above for negative pressure.

Observations:


No failures occurred as a result of the noted loadings. The door remained operable after both positive and negative tests.

Summary:

The 24'-2"x8'-0" Amarr Model 2700/3550 as described on drawing IBC-2764-104-26 meets or exceeds the testing criteria as described above. By comparison to the construction of the 24'-2"x8'-0" Amarr Model 2700/3550, the following doors also meet or exceed the above testing criteria, when constructed in accordance with drawing IBC-2764-104-26:

- 24'-2" x 8'-0" Amarr Model 2720/3550 doors (which have thicker 20ga steel sections in lieu of 27ga steel)
- Amarr Model 2700/3550 and 2720/3550 doors with widths up to 24'-2" and heights up to 24'-0"

Submitted By:

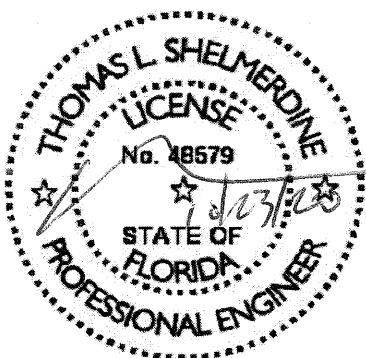

STRUCTURAL SOLUTIONS, P.A.* (*Florida: dba Structural Solutions of North Carolina, Inc., Firm #29412)

Thomas L. Shelmerdine, PE (NC PE #14654; Florida PE #0048579)

5921-G West Friendly Avenue ■ Greensboro, North Carolina 27410 ■ (336) 856-2686 ■ Fax (336) 856-2687 ■ NC Firm #C-1096