


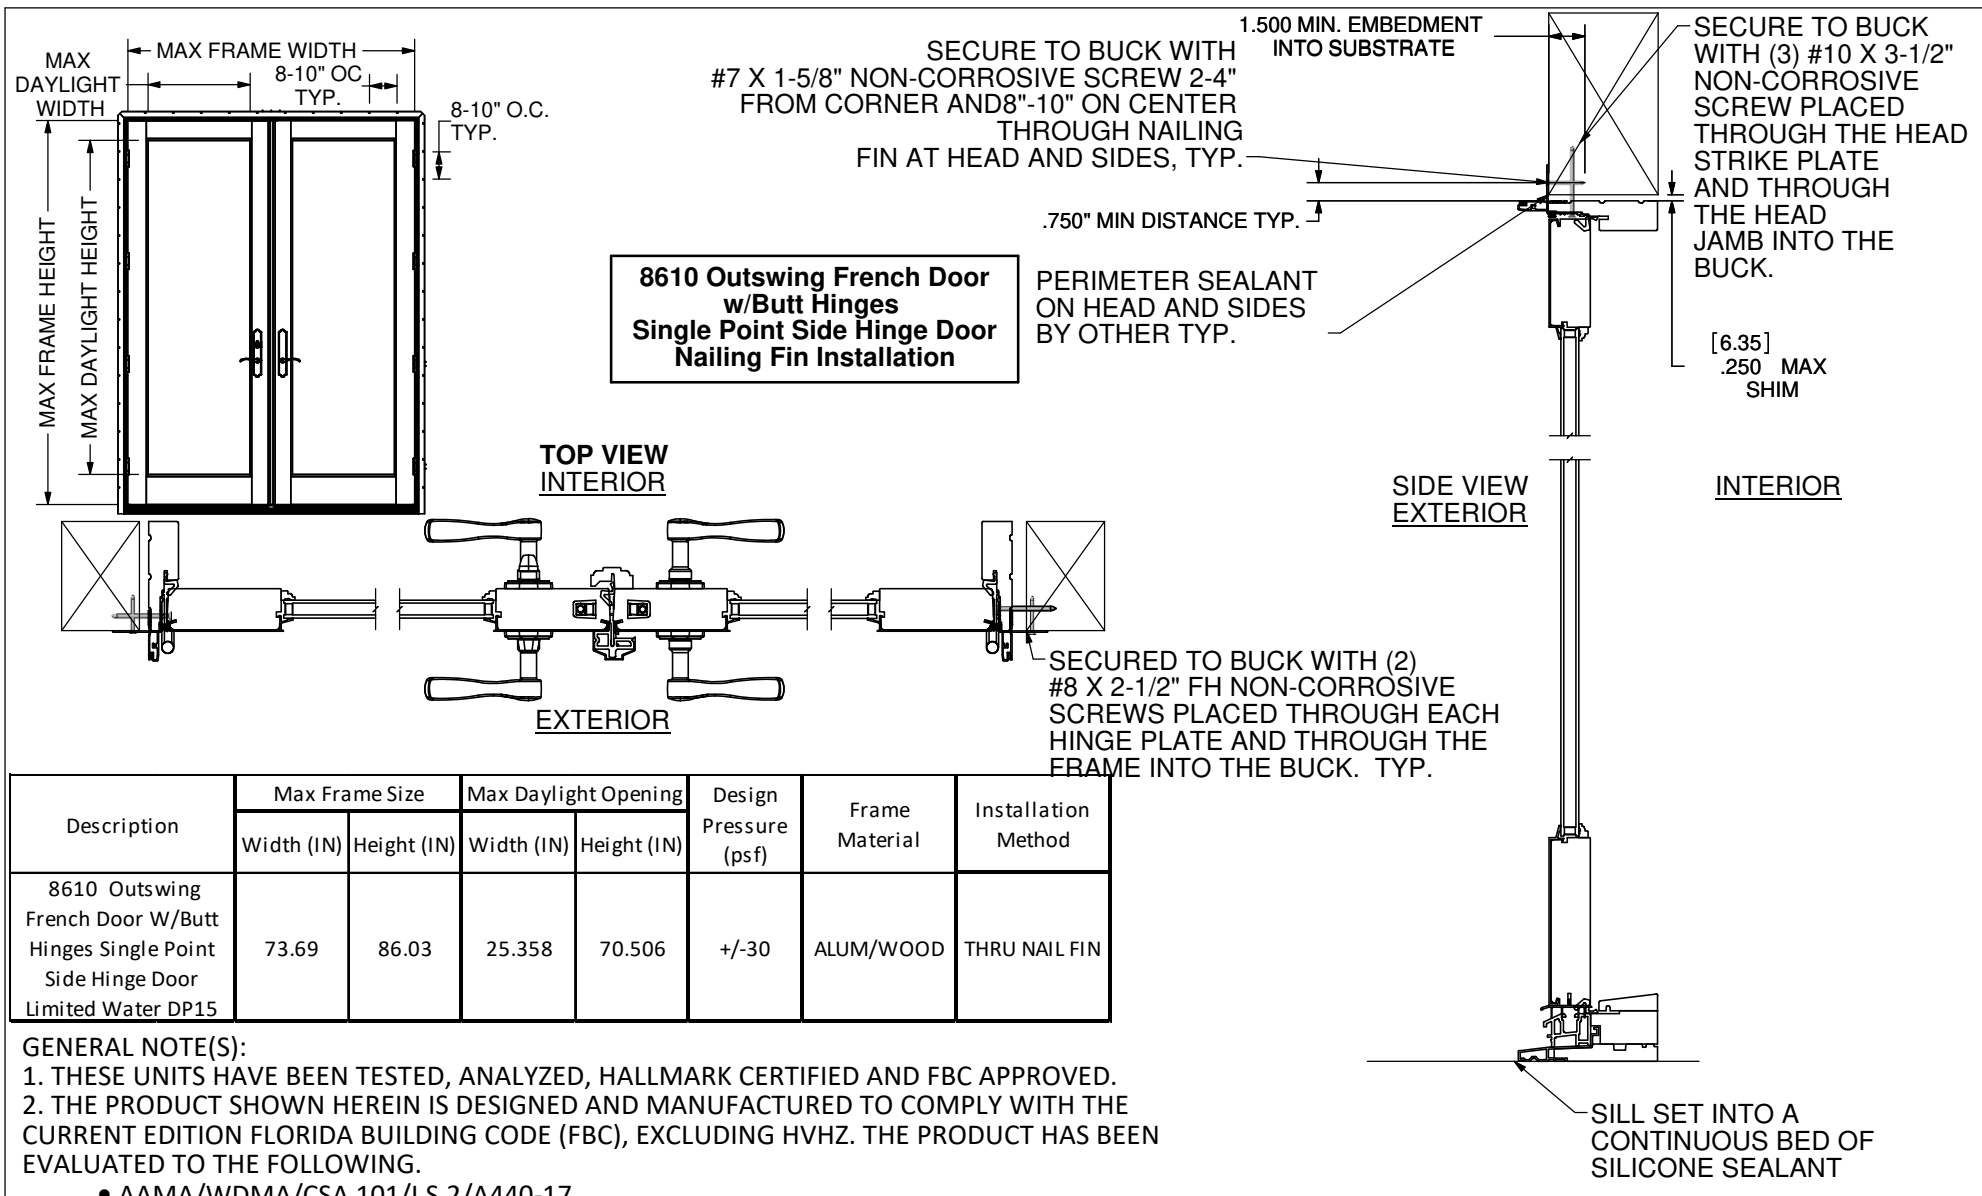

Description	Max Frame Size		Max Daylight Opening		Design Pressure (psf)	Frame Material	Installation Method
	Width (IN)	Height (IN)	Width (IN)	Height (IN)			
8610 Outswing French Door W/Butt Hinges Single Point Side Hinge Door Limited Water DP15	73.69	86.03	25.358	70.506	+/-30	ALUM/WOOD	THRU NAIL FIN

GENERAL NOTE(S):

1. THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.
 2. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), EXCLUDING HVHZ. THE PRODUCT HAS BEEN EVALUATED TO THE FOLLOWING.

- AAMA/WDMA/CSA 101/I.S.2/A440-17
- AAMA/WDMA/CSA 101/I.S.2/A440-22

3. THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE DOOR(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

					TYP. WALL THICKNESS:	CUT STOCK SIZE:		W/BUTT HINGES SINGLE PT. SIDE			
					AREA:	ECO OR W.S. #:		TITLE: HINGE DOOR			
					WT./FT.:			INSTALLATION INSTRUCTIONS			
					FILE PATH:			DWG. NO.		REV.	
								45-40261		.1	
REVISION	DATE	DESCRIPTION			WHITE SLIP NUMBER	ENG.	DO NOT SCALE DRAWING	DRAWN BY: DDD	DATE: 04/19/24	SCALE : 1:8 SHEET NAME: Sheet1 SHEET 1 OF 1	