

Certificate of Authorization #30464

Product Evaluation Report

Min. 29 Ga. AG Roof Panel Over 1x4 Wood Purlins Over 15/32 Plywood Florida Product Approval# 19041.2

Florida Building Code 2014 (5th Edition) Per Rule 61G20-3 Method: 1-D

Category: Roofing Subcategory: Metal Roofing Compliance Method: 61G20-3.005(1)(d) Zone: Non HVHZ

Product Manufacturer:


1st Coast Metal Roofing Supply 186 State Road 207 P.O. Box 177 East Palatka, FL 32131

Engineer Evaluator:

Daniel S. Kuhn, P.E. Kuhn Engineering, LLC. FL PE# 75519 FL Evaluation ANE ID: 10743

Validator: Locke Bowden, P.E., FL# 49704 9450 Alysbury Place Montgomery, AL 36117

Contents: Evaluation Report: Pages 1-4



[STRUCTURAL ENGINEERING]

Compliance Statement:	The product as described in this report has demonstrated compliance with the FBC 2014 (5 th Edition), Sec. 1504.3.2 and 1504.7.			
Product Description:	AG Roof Panel, Min. 29 Ga. Steel, 36" Coverage, through fastened roof panel over 1x4 wood purlins over minimum 15/32" plywood decking. Non-structural application.			
Panel Material/Standards:	Material: Minimum 29 Ga., ASTM A792 Aluminum-zinc coated steel (Optional Paint Finish) Steel Grade: Min. Grade 80 Corrosion Resistance: Panel material shall comply with FBC 2014, Sec. 1507.4.3.			
Panel Dimension(s):	Material Thickness: Width: Rib Height: Panel Seam: Panel Rollformer:	29 Ga. Minimum 36" (Coverage) ¾" Major Rib at 9"o.c. Lap sealant must be used for slopes less than 3:12 Cidan Machinery, Inc.		
Panel Fastener:	#10-15 X 1-1/2" HiLo Woodgrip w/ sealer washer or approved equal 1/4" minimum penetration through plywood. Corrosion Resistance: Per FBC 2014, Sec. 1506.6 and 1507.4.4.			
Minimum Slope Range:	Minimum slope 1/2:12 and shall comply with FBC 2014, Sec. 1507.4.2 and 1504.7, as well as in accordance with Manufacturer's recommendations.			
Underlayment (Optional):	Shall comply with Florida Building Code 2014, Sec. 1507.4.5.1 and 1507.4.5.2.			
Panel Substrate:	Minimum 1x4 Southern Yellow Pine #2 wood purlins over 15/32" Plywood. Increase screw length for 2x4 panel substrate to achieve ¼" penetration through plywood.			
Purlin Attachment:	Purlin attachment is outside the scope of this report.			
Purlin Substrate:	Roof framing must be spaced at 24"o.c. maximum. Design of roof rafters/ trusses, plywood, and plywood attachment/nailing pattern are outside the scope of this report.			

[STRUCTURAL ENGINEERING]

Shear Diaphragm:

Shear diaphragm values are outside the scope of this report.

Installation:

Install as per manufacturer's installation instructions and recommended details. Refer to Table "A" below for fastener pattern and spacing.

	Table "A"				
Maximum Total Uplift Design Pressures:	-108.5 psf*	-183.5 psf*			
Fastener Pattern:	9" - 9" - 9" - 9"	6" - 3" - 6" - 3" - 6" - 3" - 6"			
Fastener Spacing (max.):	24"o.c.	24"o.c.			
*Allowable (ASD) Design Pressure Includes a FS = 2.0					

Installation over Existing Shingles (Optional):

	AG panel may be installed over a <u>single layer</u> of existing roof shingles in accordance with the standards listed in FBC 2014, Section 1510.3. Attach panels into 1x4 wood purlins over existing shingles and fasten into the decking material with a minimum 1/2" penetration through plywood. All five items listed under Sec. 1510.3 must be checked and verified.
Design Procedure:	Based on the dimensions of the structure, appropriate wind loads are determined using Chapter 16 of the FBC 2014 for roof cladding wind loads. These component wind loads for roof cladding are compared to the allowable pressures listed above. The design professional shall select the appropriate erection details to reference in his drawings for proper fastener attachment to his structure and analyze the panel fasteners for pullout and pullover. Support framing must be in compliance with FBC 2014 (5 th edition).
Evaluation Report Scope:	The product evaluation is limited to compliance with the structural wind load requirements of the FBC, as relates to Rule 61G20-3.001.
Limitations and Conditions of	
	1. Scope of "Limitations and Conditions of use" for this evaluation: This evaluation report for "Optional Statewide Approvals" contains

1. Scope of "Limitations and Conditions of use" for this evaluation: This evaluation report for "Optional Statewide Approvals" contains technical documentation, specifications and installation method(s), which include "Limitations and Conditions of Use" throughout the

Kuhn Engineering, LLC.	954.552.4500	FL# 190
www.KuhnEngineering.com	info@KuhnEngineering.com	Page 2

[STRUCTURAL ENGINEERING]

	report in accordance with Rule 61G20-3.005. Per Rule 61G20-3.004, the Florida Building Commission is the authority to approve products under "Optional Statewide Approval".
	2. Option for application outside "Limitations and Conditions of Use": Rule 61G20-3.005 (1) allows engineering analysis for "project specific approval by the local authorities having jurisdiction in accordance with the alternate methods and materials authorized in the Code". Any modification of the product as evaluated in this report and approved by the Florida Building Commission is outside the scope of this evaluation and will be the responsibility of others.
	3. This product is not for use in the High Velocity Hurricane Zone sections.
Performance Standards:	 The product has been tested in accordance with: UL 580-94 – Test for Uplift resistance of Roof Assemblies – with Revisions through February 1998 UL 1897-98 – Uplift Test for Roof Covering Systems
Reference Data:	 Tests performed by Force engineering & Testing, Inc. (FBC Organization # TST-5328): UL 1897-98 – Uplift Test for Roof Covering Systems Test report No. 384-0030T-10C, D / 593-0030T-10C, D (Dated 03/29/10) FM 4471, Sec. 5.4 Foot Traffic Resistance Test Report No. 384-0030T-10E / 593-0030T-10E (Dated 03/29/10) Certificate of Independence by: Daniel S. Kuhn, P.E. (FL# 75519) at Kuhn Engineering, LLC. (FBC Organization # ANE ID: 10743)
Test Standard Equivalence:	 UL 580-94 test standard is equivalent to UL 580-06 test standard. UL 1897-98 test standard is equivalent to UL 1897-04 test standard.
Quality Assurance Entity:	The manufacturer has established compliance of roof panel products in

Kuhn Engineering, LLC.	954.552.4500	FL# 19041.2
www.KuhnEngineering.com	info@KuhnEngineering.com	Page 3 of 4

[STRUCTURAL ENGINEERING]

Min. 29 GA. AG Panel Load Table Over 1x4 Wood Purlins

Building having a Roof Mean Height ≤ 20'-0"; Roof Slope 1/2":12" – 6":12" Gable Roof Wind Speeds 100-140 mph, Exp. C, Risk Category II, based on FBC 2014

29 GA. AG PANEL FASTENER SPACING							
			WIND SPEED (mph)				
ZONE FASTENER	SUBSTRATE	100	110	120	130	140	
		ON CENTER	ON CENTER	ON CENTER	ON CENTER	ON CENTER	
		SPACING	SPACING	SPACING	SPACING	SPACING	
ZONE 1	#10-15 X 1-1/2"	1X4 WOOD PURLIN	24" TYPE 1	24" TYPE 1	24" TYPE 1	24" TYPE 1	24" TYPE 1
ZONE 2	#10-15 X 1-1/2"	1X4 WOOD PURLIN	24" TYPE 1	24" TYPE 1	24" TYPE 1	24" TYPE 1	24" TYPE 1
ZONE 3	#10-15 X 1-1/2"	1X4 WOOD PURLIN	24" TYPE 2	24" TYPE 2	24" TYPE 2	24" TYPE 2	24" TYPE 2

Notes:

1) Panel Description: AG panel, Min. 29 GA., ¾" Tall Rib at 9"o.c., 36" Width

2) Panel Fastener: #10-15 x 1-1/2" HiLo Woodgrip w/ sealer washer or equivalent


3) Panel Rollformer: Cidan Machinery, Inc.

4) Maximum Allowable Panel Uplift Pressures based on UL 580/UL 1897 testing by Force Engineering Test report #384-0030T-10C, D / 593-0030T-10C, D:

108.5 psf at 24" o.c. Type 1 Fastener Pattern

183.5 psf at 24" o.c. Type 2 Fastener Pattern

- 5) Substrate: 1x4 wood purlins over minimum 15/32" thick plywood.
- 6) Existing Shingles (Optional): Panels may be attached over single layer of existing shingles as per requirements listed in this report.

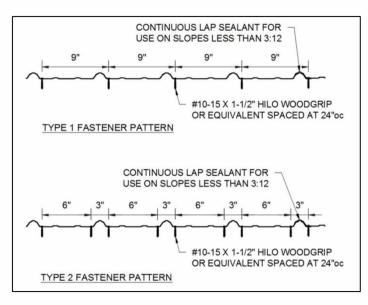

Kuhn Engineering, LLC. www.KuhnEngineering.com