



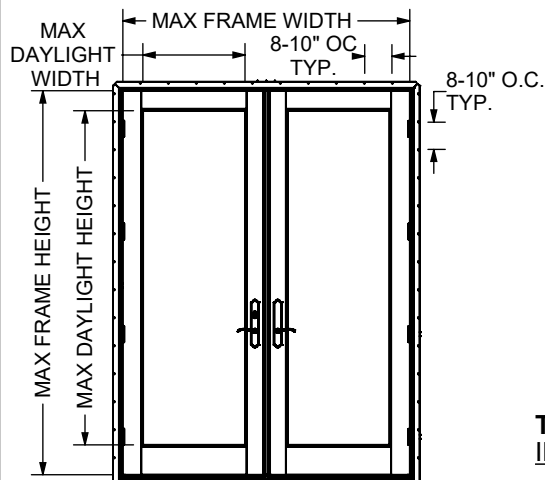

**8610 Outswing French Door
w/Butt Hinges
Single Point Side Hinge Door
Nailing Fin Installation**

**TOP VIEW
INTERIOR**

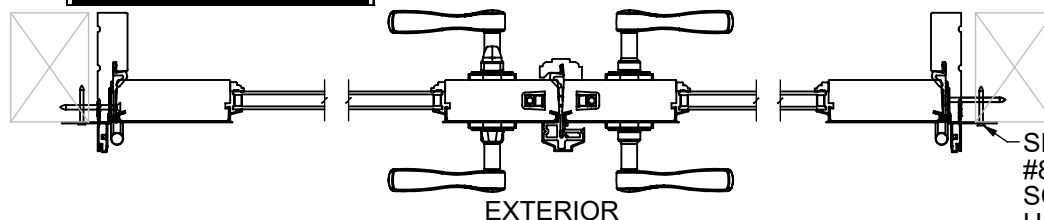

EXTERIOR

SECURE TO BUCK WITH
#7 X 1-5/8" NON-CORROSIVE SCREW 2-4"
FROM CORNER AND 8"-10" ON CENTER
THROUGH NAILING
FIN AT HEAD AND SIDES, TYP.

1.500 MIN. EMBEDMENT
INTO SUBSTRATE

.750" MIN DISTANCE TYP.

PERIMETER SEALANT
ON HEAD AND SIDES
BY OTHER TYP.

[6.35]
.250 MAX
SHIM

SECURE TO BUCK
WITH (3) #10 X 3-1/2"
NON-CORROSIVE
SCREW PLACED
THROUGH THE HEAD
STRIKE PLATE
AND THROUGH
THE HEAD
JAMB INTO THE
BUCK.

**SIDE VIEW
EXTERIOR**

INTERIOR

SECURED TO BUCK WITH (2)
#8 X 2-1/2" FH NON-CORROSIVE
SCREWS PLACED THROUGH EACH
HINGE PLATE AND THROUGH THE
FRAME INTO THE BUCK. TYP.

SILL SET INTO A
CONTINUOUS BED OF
SILICONE SEALANT

Description	Max Frame Size		Max Daylight Opening		Design Pressure (psf)	Frame Material	Installation Method
	Width (IN)	Height (IN)	Width (IN)	Height (IN)			
8610 Outswing French Door W/Butt Hinges Single Point Side Hinge Door Limited Water DP15	73.69	86.03	25.358	70.506	+/-30	ALUM/WOOD	THRU NAIL FIN

GENERAL NOTE(S):

- THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.
- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), EXCLUDING HVHZ. THE PRODUCT HAS BEEN EVALUATED TO THE FOLLOWING.
 - AAMA/WDMA/CSA 101/I.S.2/A440-17
 - AAMA/WDMA/CSA 101/I.S.2/A440-22
- THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE DOOR(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.
- FASTENERS, ANCHORS, AND CONNECTORS SHALL COMPLY WITH THE CORROSION RESISTANCE REQUIREMENTS OF THE 2026 FLORIDA BUILDING CODE, SECTION 1711, BASED ON EXPOSURE CONDITIONS AND PROXIMITY TO A SALTWATER SHORELINE AND NOT ALL THE ONES SHOWN HERE NECESSARILY APPLY.

MATERIAL:
DIV./ORDER #:
DATE ORDERED:
Q.C. COMPARATOR CHECK: ☐
FINISH:
CUT STOCK SIZE:
ECO OR W.S. #:
TYP. WALL THICKNESS:
AREA:
WT./FT.:
FILE PATH:

Weather Shield Windows & Doors

PRODUCTS: 8610 OUTSWING FRENCH DOOR
W/BUTT HINGES SINGLE PT. SIDE
HINGE DOOR
TITLE: INSTALLATION INSTRUCTIONS

DWG. NO. 45-40261 REV. .1

SCALE: 1:8 SHEET NAME: Sheet1 SHEET 1 OF 1

REVISION	DATE	DESCRIPTION	WHITE SLIP NUMBER	ENG.

DO NOT SCALE DRAWING

DRAWN BY: DDD DATE: 04/19/24