

MCY ENGINEERING, INC.
GLAZING CONSULTANT

12781 Miramar Parkway, Suite 301
Miramar, FL. 33027
Mobile: (305) 588-5224
Office: (305) 271-0117

PRODUCT APPROVAL EVALUATION REPORT

<u>Product Manufacturer:</u> Hurricane Protection Manufacturers Association 15002 NW 107 AVENUE.SUITE#1 HIALEAH GARDENS, FL. 33018	<u>Product Name/Model & Description:</u> Performance System 2 Aluminum Accordion Shutter – Large and small missile impact
--	--

Scope: This product has been evaluated by the below-signed Florida Professional Engineer for compliance with the Code noted herein and is, for the purpose intended, at least equivalent to that required by the Code, in accordance with section 553.842 F.S. & chapter 61G20-3.005 F.A.C. Re-evaluation of this product shall be required following applicable Code modifications or revisions.


Code: 7th Edition Florida Building Code (2020) / 8th Edition Florida Building Code (2023), inclusive of all Supplements effective as of this report date.

Compliance Method: 61G20-3.005 (1)(d) – Evaluation Report from a licensed Professional Engineer


Product Description: Product Approval **Drawing #AD16-13**, prepared by MCY Engineering, signed and sealed by Yiping Wang, P.E., is an integral part of this Evaluation Report.

Limitations & Conditions of Use:

- This product has been evaluated for use **inside and outside of the HVHZ** (High-Velocity Hurricane Zone)
- Impact Resistance: **Large Missile Impact**
- Refer to Product Approval Drawing noted above for:
 - Maximum allowable wind loads at the related maximum allowable size(s).
 - Other load limitations applicable to the product, if any.
 - Overall dimensions and material/grade of main product components, accessories, etc.
 - Illustrated diagrams of the attachment of the product to the structure.
 - Anchor type(s), size(s), substrate(s), embedment, edge distance, and spacing/locations.

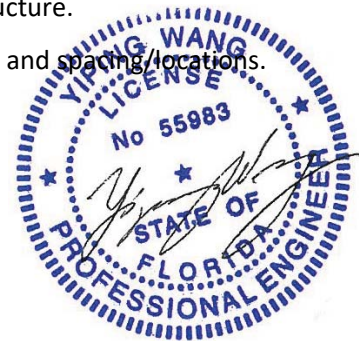

November 9th, 2023



MCY ENGINEERING, INC.
GLAZING CONSULTANT

12781 Miramar Parkway, Suite 301
Miramar, FL. 33027
Mobile: (305) 588-5224
Office: (305) 271-0117

Test Reports:

Mandatory Tests (Tested in accordance with Florida Building Code Tests Protocols)

Test Lab	Report Number	Test Report Date	Test Standard & Description
Fenestration Testing Laboratory, Inc. (FTL), Medley, FL 33166.	<i>FTL 8140, signed and sealed by Idalmis Ortega P.E, FL# 76905</i>	12/18/14	TAS 202 (uniform load and structural) TAS 201 (large missile impact test) TAS 203 (cyclic wind pressure loading)
Construction Testing Corporation. (CTC), Miami, FL 33054	<i>06-039, signed and sealed by Yamil G. Kuri, PE, FL# 44726</i>	02/13/07	TAS 202 (uniform static air pressure) TAS 201 (large missile impact) TAS 203 (cyclic wind pressure loading)
Construction Testing Corporation. (CTC), Miami, FL 33054	<i>09-006, signed and sealed by Yamil G. Kuri, PE, FL# 44726</i>	02/24/09	TAS 202 (uniform static air pressure) TAS 201 (large missile impact) TAS 203 (cyclic wind pressure loading)
Construction Testing Corporation. (CTC), Miami, FL 33054	<i>08-001, signed and sealed by Yamil G. Kuri, PE, FL# 44726</i>	04/28/08	TAS 202 (uniform static air pressure) TAS 201 (large missile impact) TAS 203 (cyclic wind pressure loading)

Engineering Analysis: The following engineering analyses and/or calculations have been performed:

- No comparative analysis has been performed for conditions other than those tested.
- No rational analysis has been performed.
- Anchor calculations are based on manufacturer's published anchor capacity, anchor Notice of Acceptance by Miami Dade County.



November 9th, 2023