

EVALUATION REPORT

FLORIDA BUILDING CODE, 9TH EDITION (2026)

Manufacturer: ARCHITECTURAL METAL FLASHINGS, LLC
2659 NE 9th Avenue
Cape Coral, FL 33909
(239) 980-0730

Issued October 16, 2026

Manufacturing: Cape Coral, FL

Quality Assurance: PRI Construction Materials Technologies (QUA9110)

SCOPE

Category:	Roofing
Subcategory:	Roofing Accessories that are an Integral Part of the Roofing System
Code Edition:	Florida Building Code, 9 th Edition (2026) Non-HVHZ
Code Sections:	1503.5, 1709.2
Properties:	Roof Ventilation

REFERENCES



Entity	Report No.	Standard	Year
PRI Construction Materials Technologies (TST5878)	1897T0004	ASTM E 330	2014(2021)
PRI Construction Materials Technologies (TST5878)	1897T0005	Dimensional verification	2022

PRODUCT DESCRIPTION

Product: Off Ridge Vent

Description: Nominal 4-ft off ridge vent; Max. 8" high

Material: Min. 26 ga. ($F_y = \text{min. } 50 \text{ ksi}$) aluminum zinc coated steel (Min. ASTM A792 AZ50) or ASTM A653 G90 steel; Shall conform with FBC Section 1507.4.3

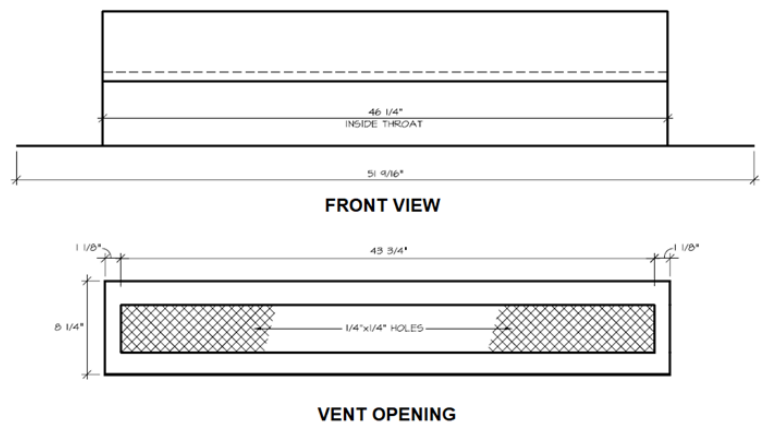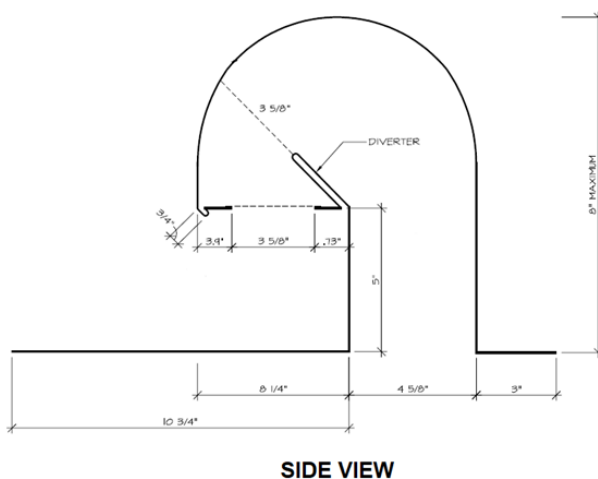




PRODUCT APPLICATION

Deck Type: Minimum 15/32-inch APA span rated plywood sheathing for new and existing roof deck (Deck shall be designed by others in accordance with FBC requirements).

Attachment Method: Cut a 46" x 3-1/2" slot according to manufacturer's instructions through the deck and sheathing. For a single vent, install the vent as close to the center of the roof length as possible. Multiple vents should be evenly spaced along the roof length.

Attach the vent with minimum 12 ga. galvanized, ring shank roofing nails with minimum 3/8-inch diameter head and sufficient length to penetrate through the sheathing a minimum 3/8-inch. Nails shall be installed 4-inch o.c. in a staggered pattern along all four sides of the vent flange. The flange edge and all exposed fasteners shall be covered and sealed with ASTM D 1668 fabric embedded in ASTM D 4586 roof cement.

Maximum Design Pressures: **-67.5 psf**
Pressures calculated using 2:1 margin of safety per 1504.9

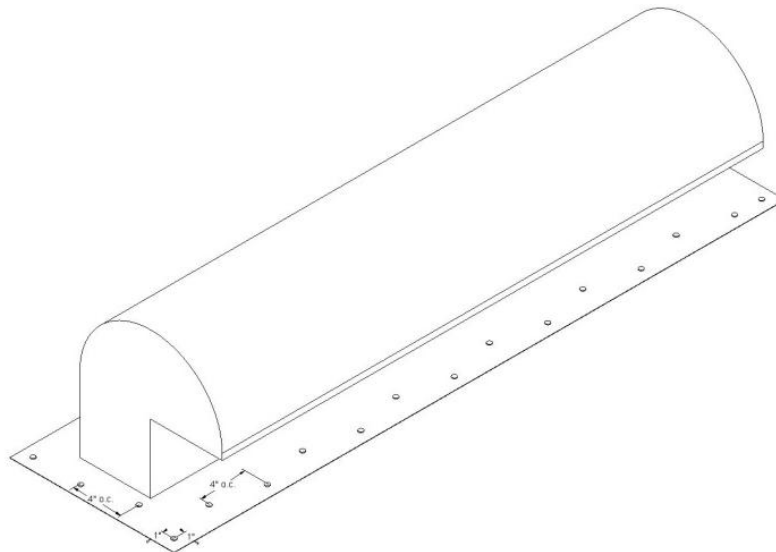


LIMITATIONS

1. This report is not for use in the HVHZ.
2. Fire Classification is outside the scope of this evaluation.
3. The roof deck and deck attachment shall be designed by others in accordance with the FBC.
4. Off ridge vents shall be installed in strict compliance with this evaluation report and the manufacturer's published installation instructions. In the event of conflict, the more restrictive installation shall be enforced.
5. Deck substrates shall be clean, dry, and free from any irregularities and debris. All fasteners in the deck shall be checked for protrusion prior to installation.
6. All materials shall conform to FBC Section 1506.
7. Installation of the roof assembly is outside the scope of this evaluation.
8. Off ridge vents are intended to provide passive ventilation for an enclosed attic in residential construction applications
9. Materials shall conform to FBC Sections 1506 and 1711.
10. All products listed in this report shall be manufactured under a quality assurance program in compliance with Rule 61G20-3.

COMPLIANCE STATEMENT

This report has been prepared in accordance with F.A.C. Rule 61G20-3.

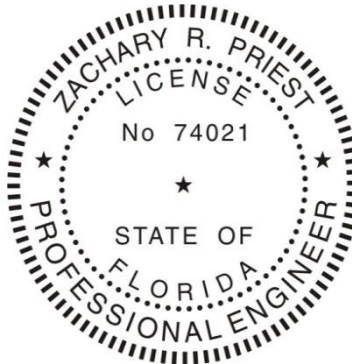

This item has been
digitally signed and
sealed by Zachary R.
Priest, PE, on 10/16/2026.

Printed copies of this
document are not
considered signed and
sealed and the signature
must be verified on any
electronic copies.


Digitally signed by Zachary R. Priest
ARCHITECTURAL METAL FLASHINGS, LLC

2026.10.16
13:58:40
-04'00'

Zachary R. Priest, P.E.
Florida Registration No. 74021
Organization No. ANE9641

CERTIFICATION OF INDEPENDENCE

CREEK Technical Services, LLC does not have, nor will it acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

CREEK Technical Services, LLC is not owned, operated, or controlled by any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.

END OF REPORT