

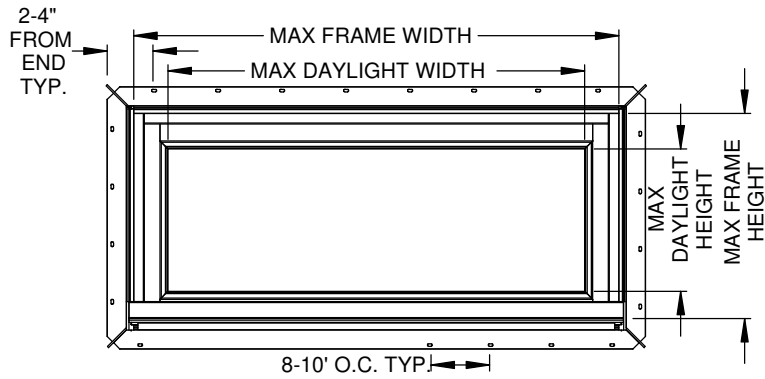


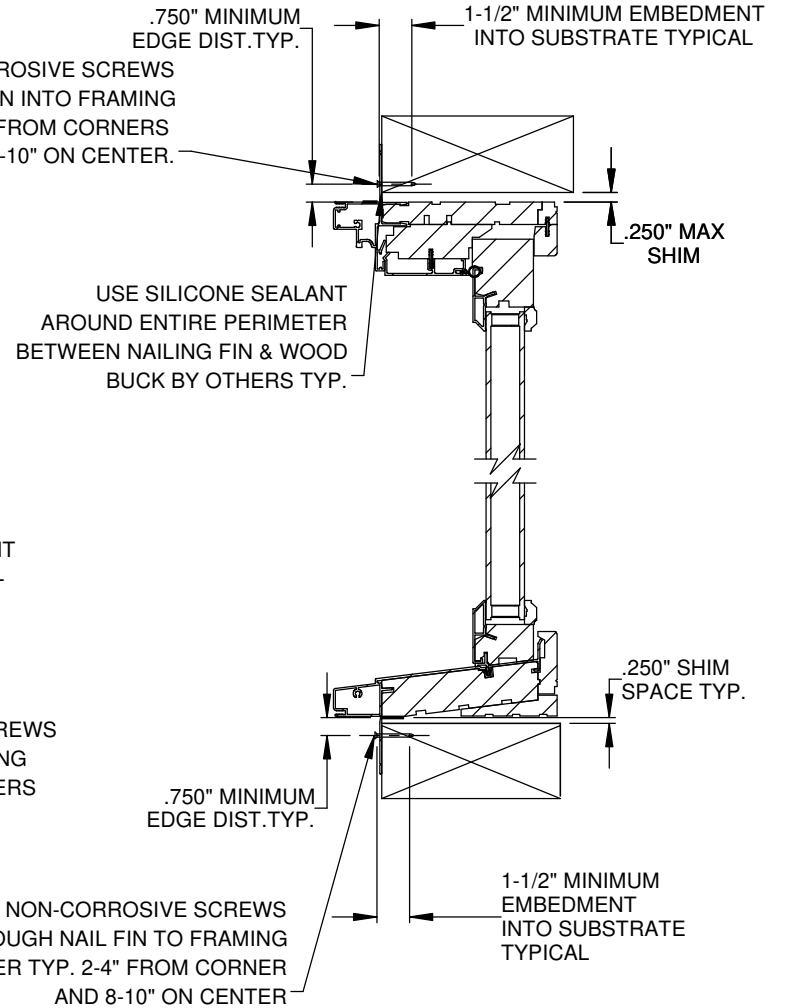

8117 DOUBLE HUNG
TRANSOM FIXED WINDOW
NAILING FIN INSTALLATION

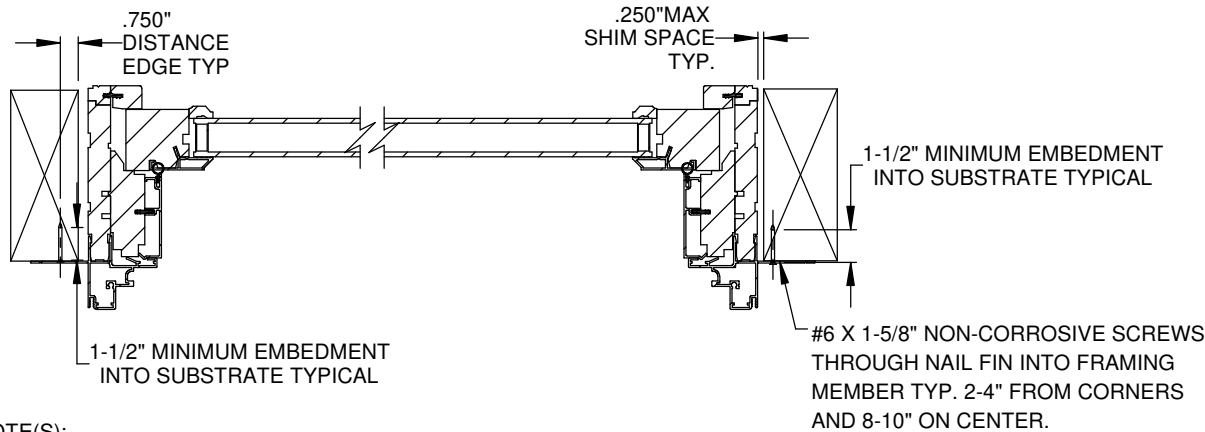

NOTE(S):

1. INSTALLATION QUALIFIES SINGLE UNIT.
2. THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.
3. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), EXCLUDING HVHZ. THE PRODUCT HAS BEEN EVALUATED TO ONE OR MORE OF THE FOLLOWING:
 - AAMA/WDMA/CSA 101/I.S.2/A440-11
 - AAMA/WDMA/CSA 101/I.S.2/A440-17
4. THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

Description		Frame Size		Daylight Opening		Design Pressure (psf)	Frame Material	Installation Method
		Width (IN)	Height (IN)	Width (IN)	Height (IN)			
8117	Double Hung Transom Fixed Window	71.5	59.5	65	53.13	+/-50	Alum/Wood/Vinyl	thru Nail Fin

						TYP. WALL THICKNESS:	
						WT/FT:	AREA:
						MAT:	FINISH:
REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:	PROFILE #:	

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.X ± .1"	XX ± 1°
.XX ± .03"	XX.X ± .5° (1/2°)
.XXX ± .015"	XX.XX ± .25° (1/4°)

WEATHER SHIELD.
WINDOWS & DOORS

PRODUCTS:
8117 DOUBLE HUNG TRANSOM FIXED WINDOW

DRAWN BY: DDD	DATE: 04/26/24	TITLE: INSTALLATION INSTRUCTIONS
DWG NO.: 45-40357		REV
SCALE: 1:4	SHEET NAME: Sheet 1	SHEET 1 OF 1

DO NOT SCALE DRAWING