

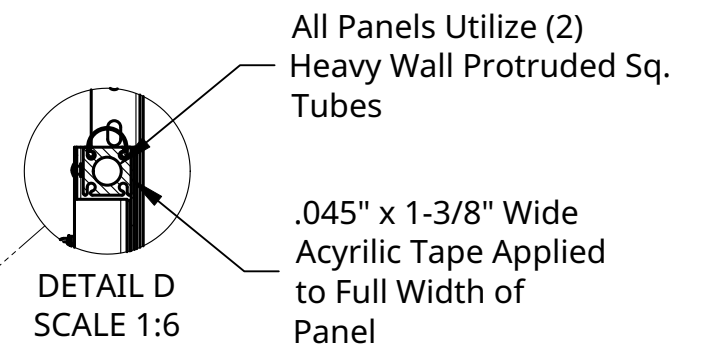
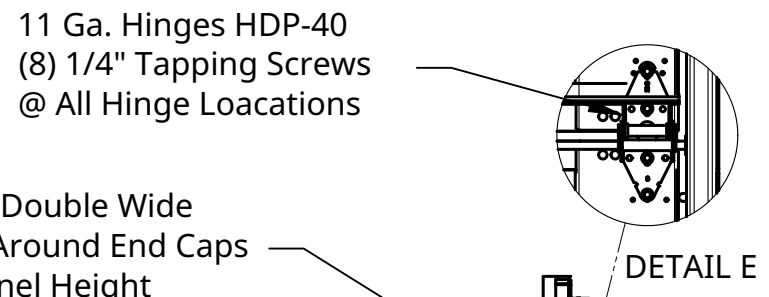
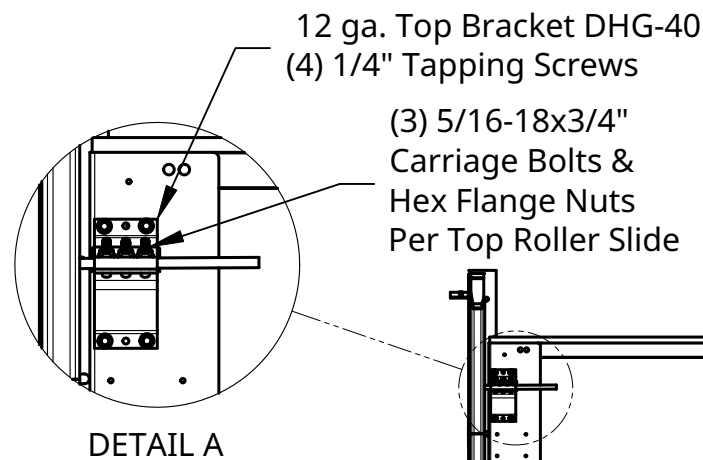


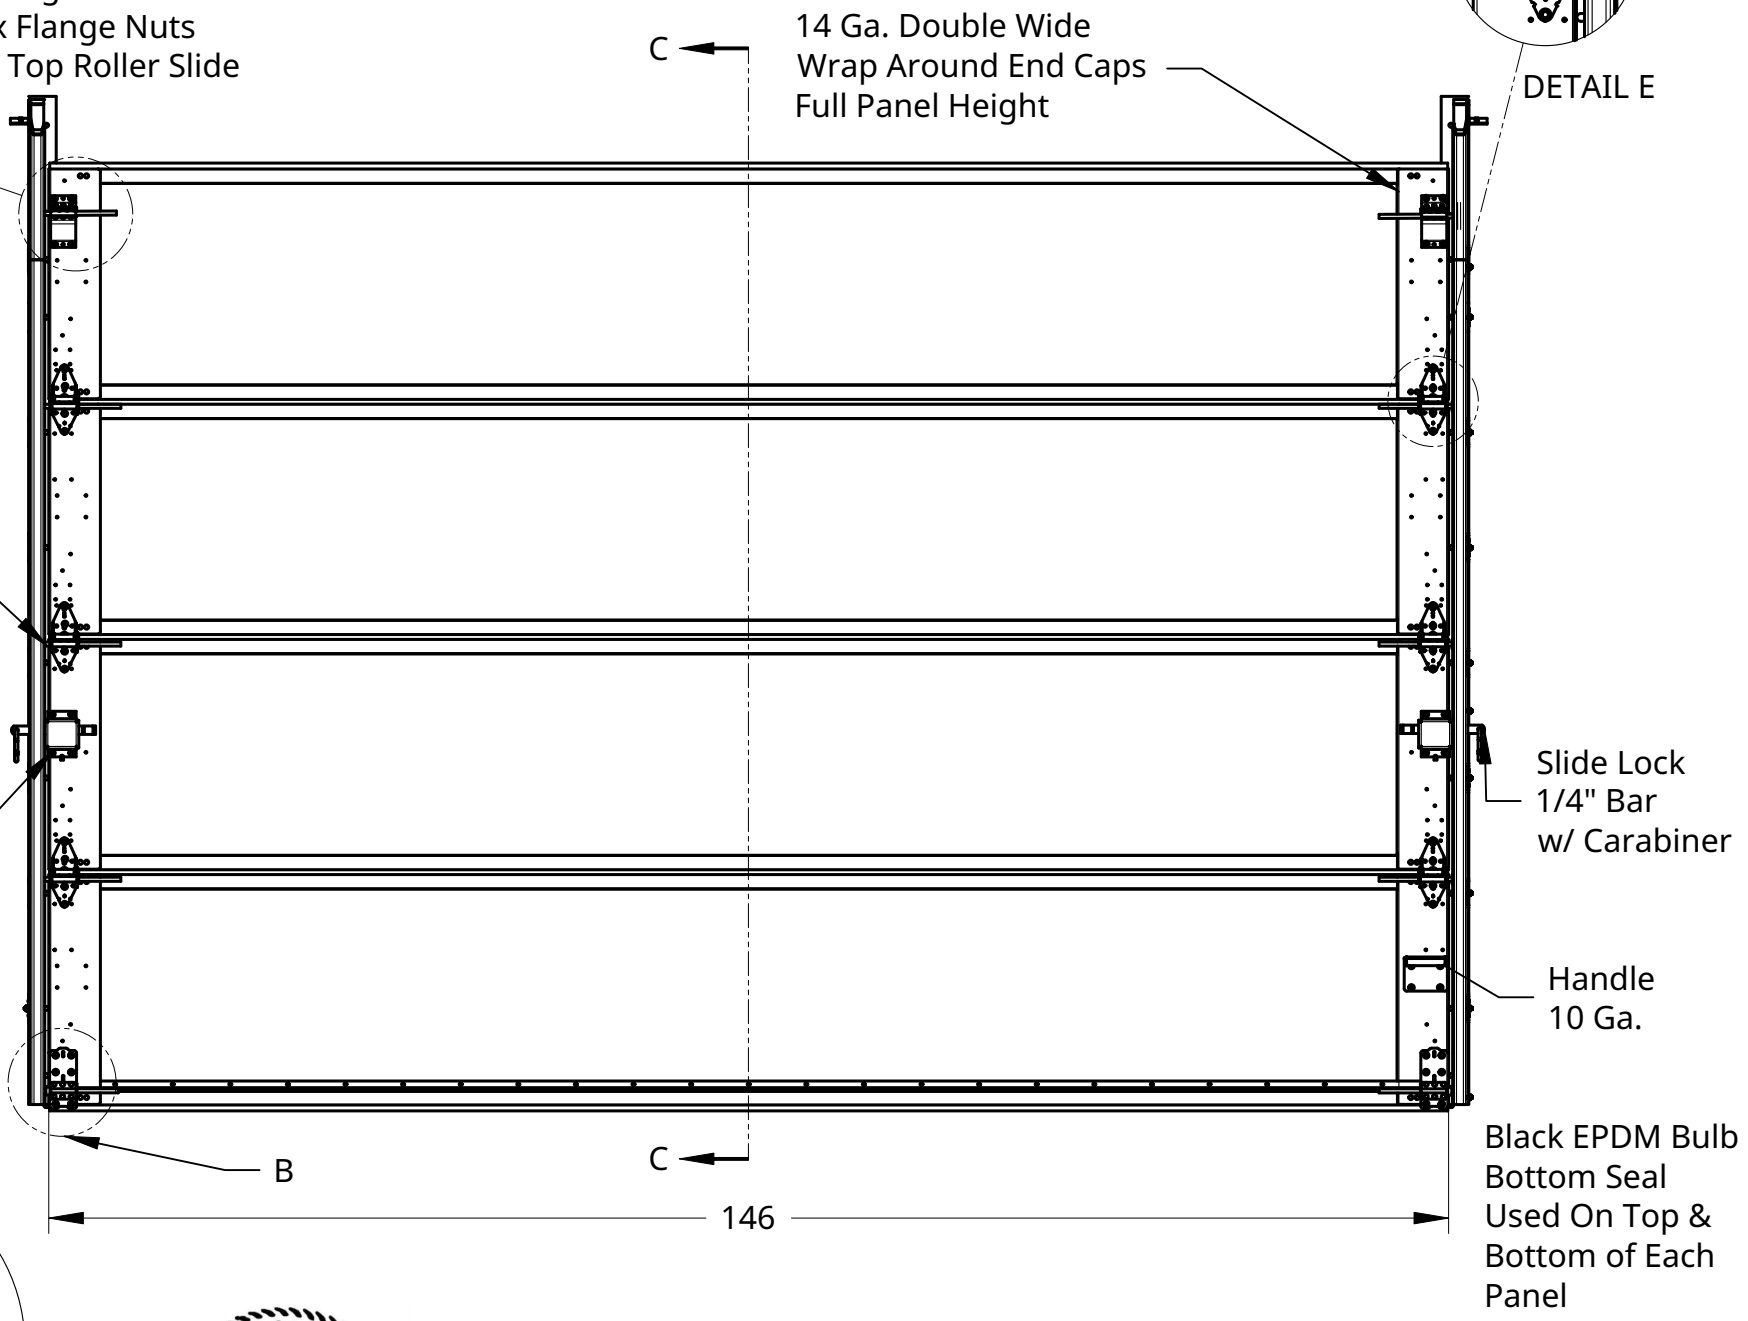

3" x 7" Steel Roller
w/ High Strength Steel
Shafts @ Each Hinge
Location

Slide Lock
1/4" Bar
w/
Carabiner

13 Ga. Bottom Bracket
HDG-40
(6) 1/4" Tapping Screws

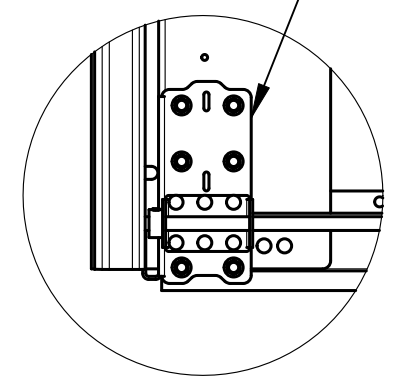

Exterior Door 1/4" Polycarbonate
All Panels

Width	+psf	-psf
9	40.0	-45.6
10	36.0	-41.0
12	30.0	-34.2
14	22.0	-25.1

Slide Lock
1/4" Bar
w/ Carabiner



Handle
10 Ga.

Black EPDM Bulb
Bottom Seal
Used On Top &
Bottom of Each
Panel

SECTION C - C

JOHN E. SCATES, P.E.
8811 TEEL PKWY #100-5175
FRISCO, TX 75034
FL PE 51737

TX PE 56308 / F-2203

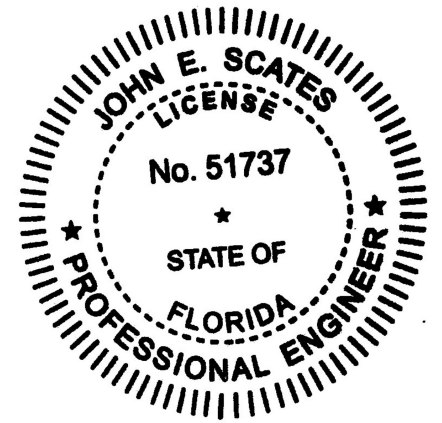


Digitally signed by John E Scates
Date: 2025.10.14 09:29:12 -04'00'

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES
.X = ±.025
.XX = ±.010
.XXX = ±.005
ANGULAR = ± 2°
FRACTIONAL = ± 1/32
SURFACE FINISH 250
DO NOT SCALE DRAWING
BREAK ALL SHARP EDGES AND
REMOVE BURRS
THIRD ANGLE PROJECTION

	NAME	DATE
DRAWN	STEVEN OLSON	08/25/2025
CHECKED		
APPROVED		

TITLE DFF-WL-146" W X 96" H @ +30 / -34.2 PSF-FBC			
SIZE B	DWG NO. DF-DR-00114	REV.	
SCALE N/A	WEIGHT	SHEET 1 of 3	

REV	DESCRIPTION	BY	DATE
	INITIAL RELEASE	STEVEN OLSON	08/25/2025

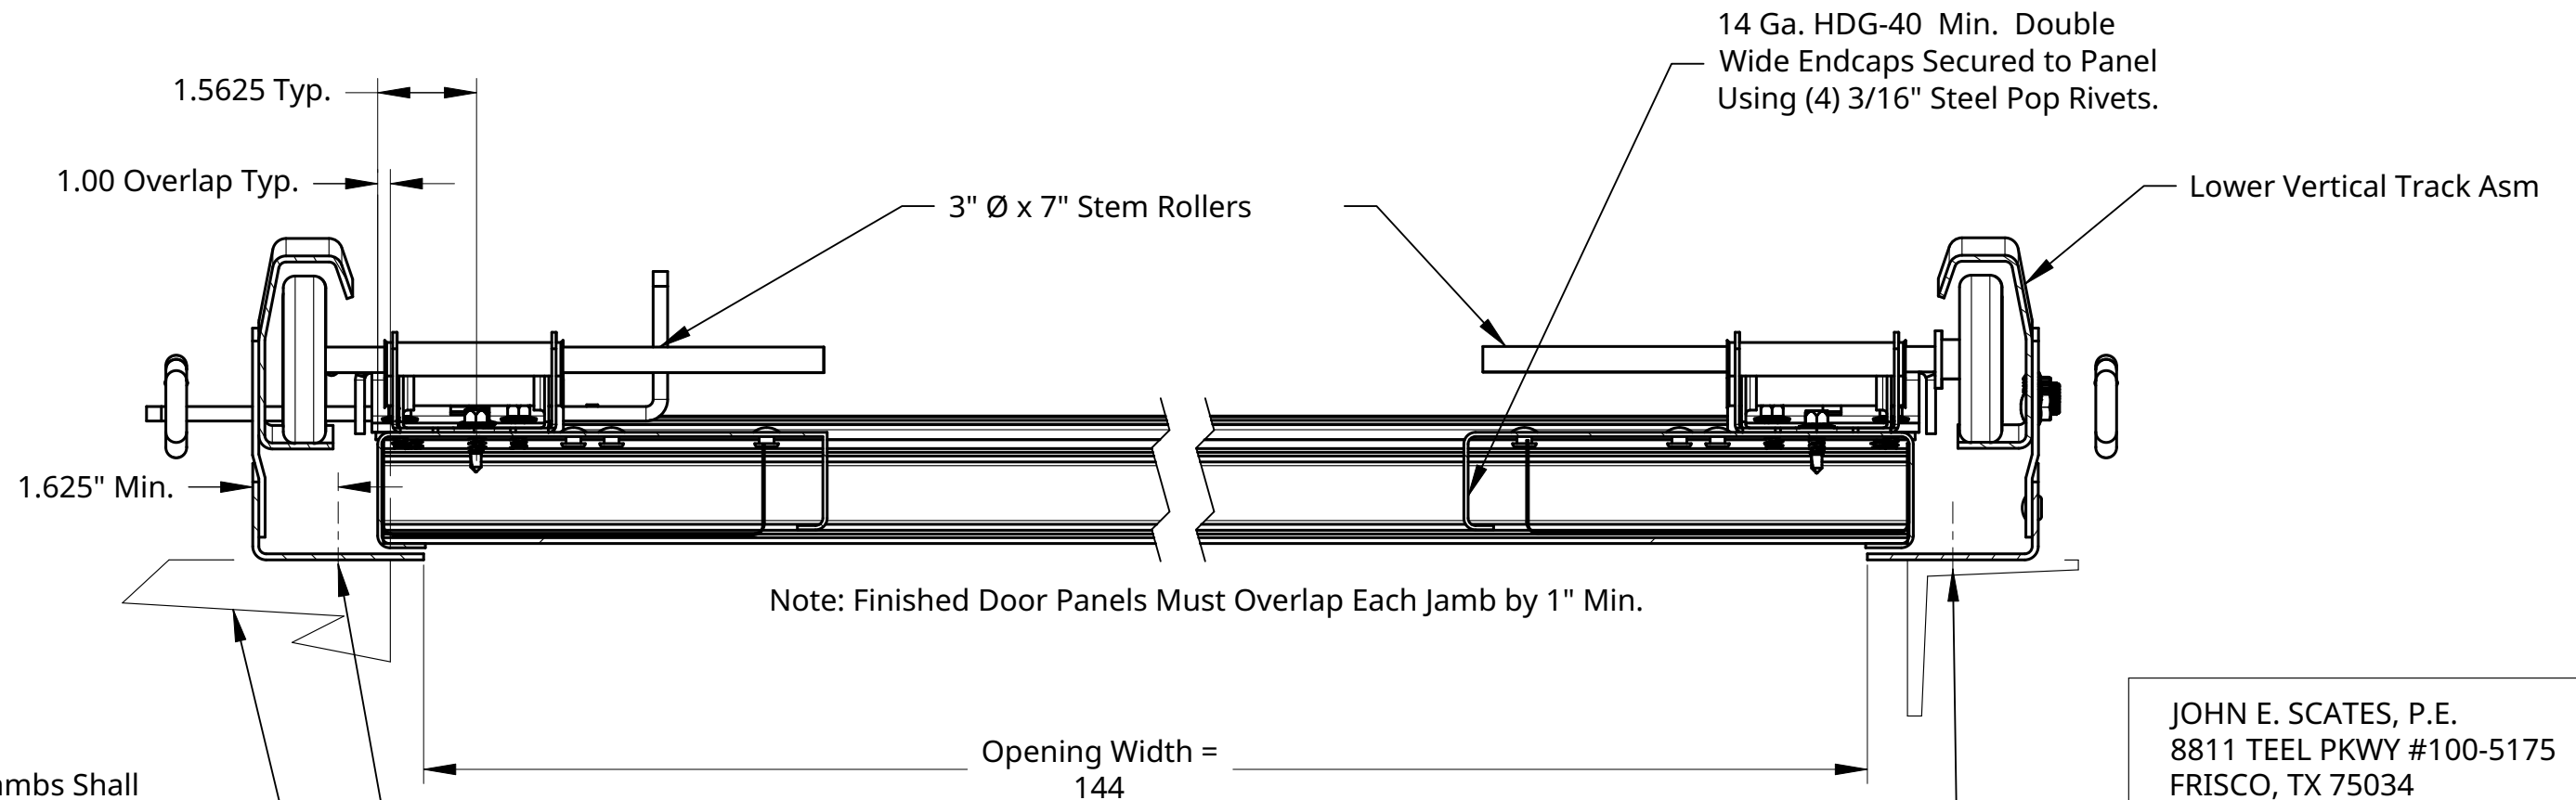



Walls and Jambs Shall be Designed (By Others) to Withstand Loads Imposed by Door onto the Building.

3,000 PSI Normal Weight Concrete
3/8"x3" Wedge Anchors w/ 2-1/2" Min. Embedment or Equivilent Faster (Supplied by Others) Refer to WL Track DWG for Anchor Spacing to Secure Lower Vertical Track Assembly to the Jambs.

5/16" or 3/8" Hex Washer Head Self Drilling & Tapping Screws (Supplied by Others) Refer to WL Track DWG for Anchor Spacing to Secure Lower Vertical Track Assembly to the Jambs.

JOHN E. SCATES, P.E.
8811 TEEL PKWY #100-5175
FRISCO, TX 75034
FL PE 51737

TX PE 56308 / F-2203

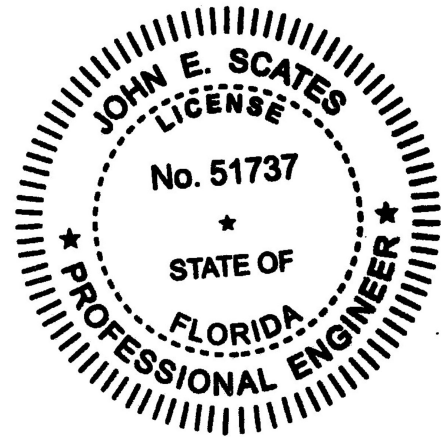


REV	DESCRIPTION	BY	DATE
	INITIAL RELEASE	STEVEN OLSON	08/25/2025

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES .X = ±.025 .XX = ±.010 .XXX = ±.005 SURFACE FINISH 250 DO NOT SCALE DRAWING BREAK ALL SHARP EDGES AND REMOVE BURRS THIRD ANGLE PROJECTION

	NAME	DATE
DRAWN	STEVEN OLSON	08/25/2025
CHECKED		
APPROVED		
MATERIAL		


TITLE DFF WL TRACK & JAMB DETAILS FOR DWE			
SIZE B	DWG NO. DF-DR-00114	REV.	
SCALE N/A	WEIGHT	SHEET 2 of 3	

Note: All Doors Require (1) Back Hanger Angle Support at the Rear of Each Horizontal Track Assembly & All Door Heights Above 8' Requires (1) Center Support Hanger Angle Per Horizontal Assembly

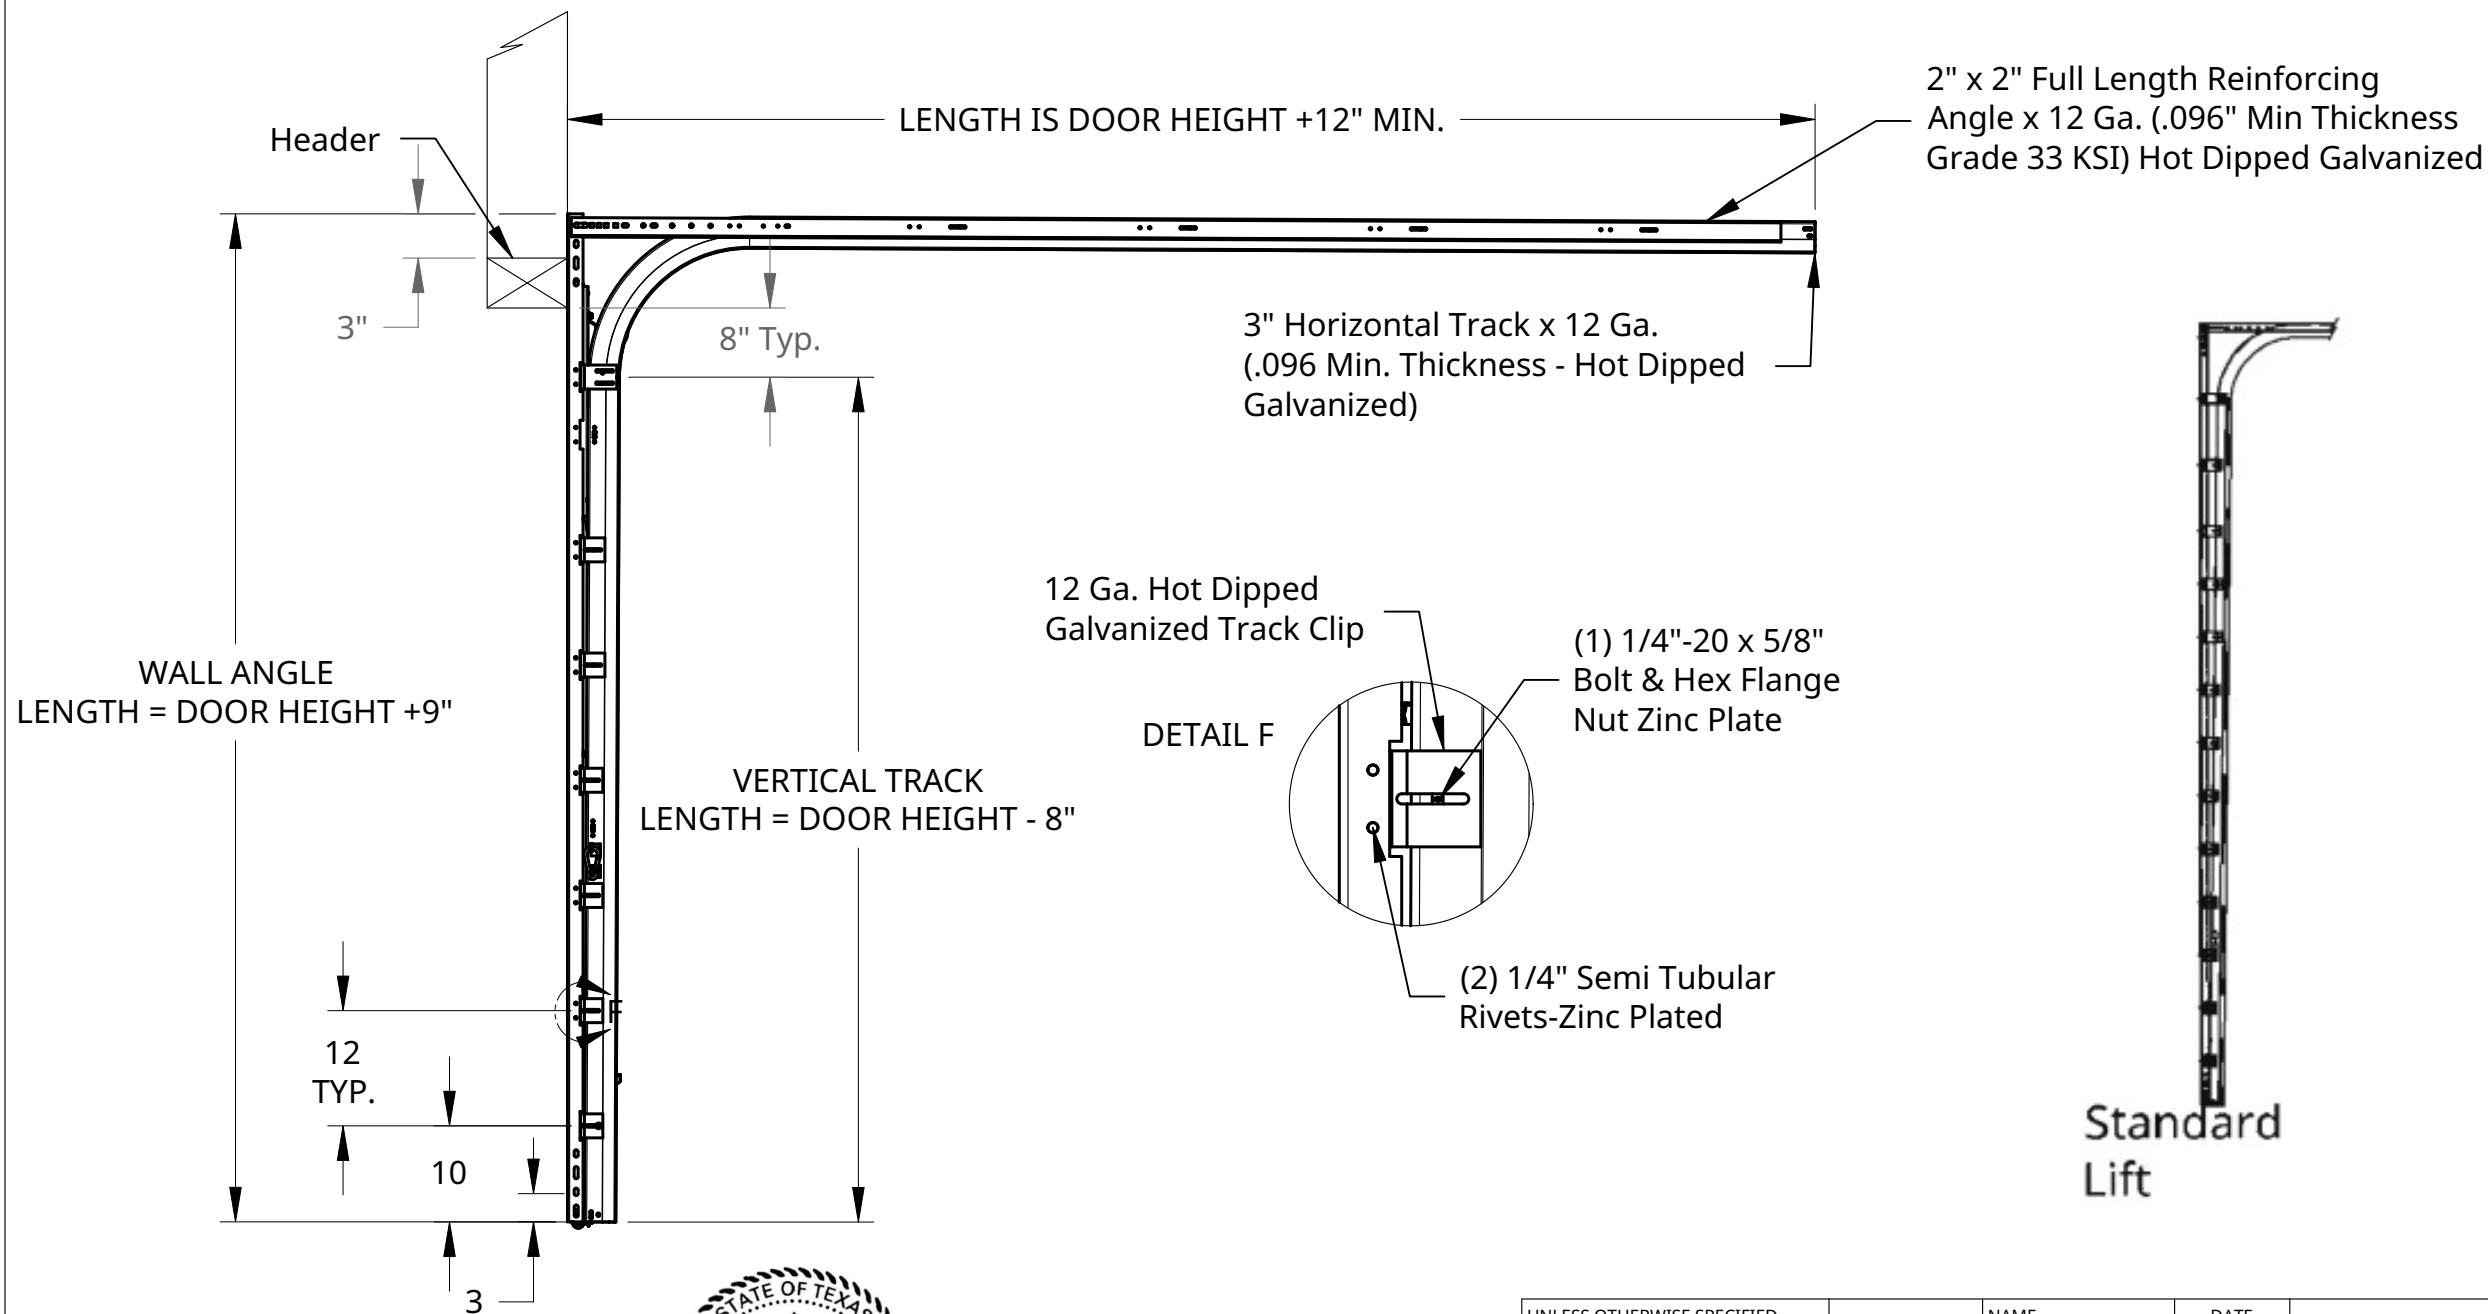

JOHN E. SCATES, P.E.
8811 TEEL PKWY #100-5175
FRISCO, TX 75034
FL PE 51737

TX PE 56308 / F-2203



REV	DESCRIPTION	BY	DATE
	INITIAL RELEASE	STEVEN OLSON	08/25/2025

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES .X = ±.025 .XX = ±.010 .XXX = ±.005 SURFACE FINISH 250 DO NOT SCALE DRAWING BREAK ALL SHARP EDGES AND REMOVE BURRS THIRD ANGLE PROJECTION	NAME STEVEN OLSON DATE 08/25/2025 DRAWN CHECKED APPROVED MATERIAL
---	--

TITLE DFF-WL-146" W X 96" H @ +30 / -34.2 PSF-FBC DFF WL TRACK DWG			
SIZE B	DWG NO. DF-DR-00114	REV.	
SCALE N/A	WEIGHT	SHEET 3 of 3	