


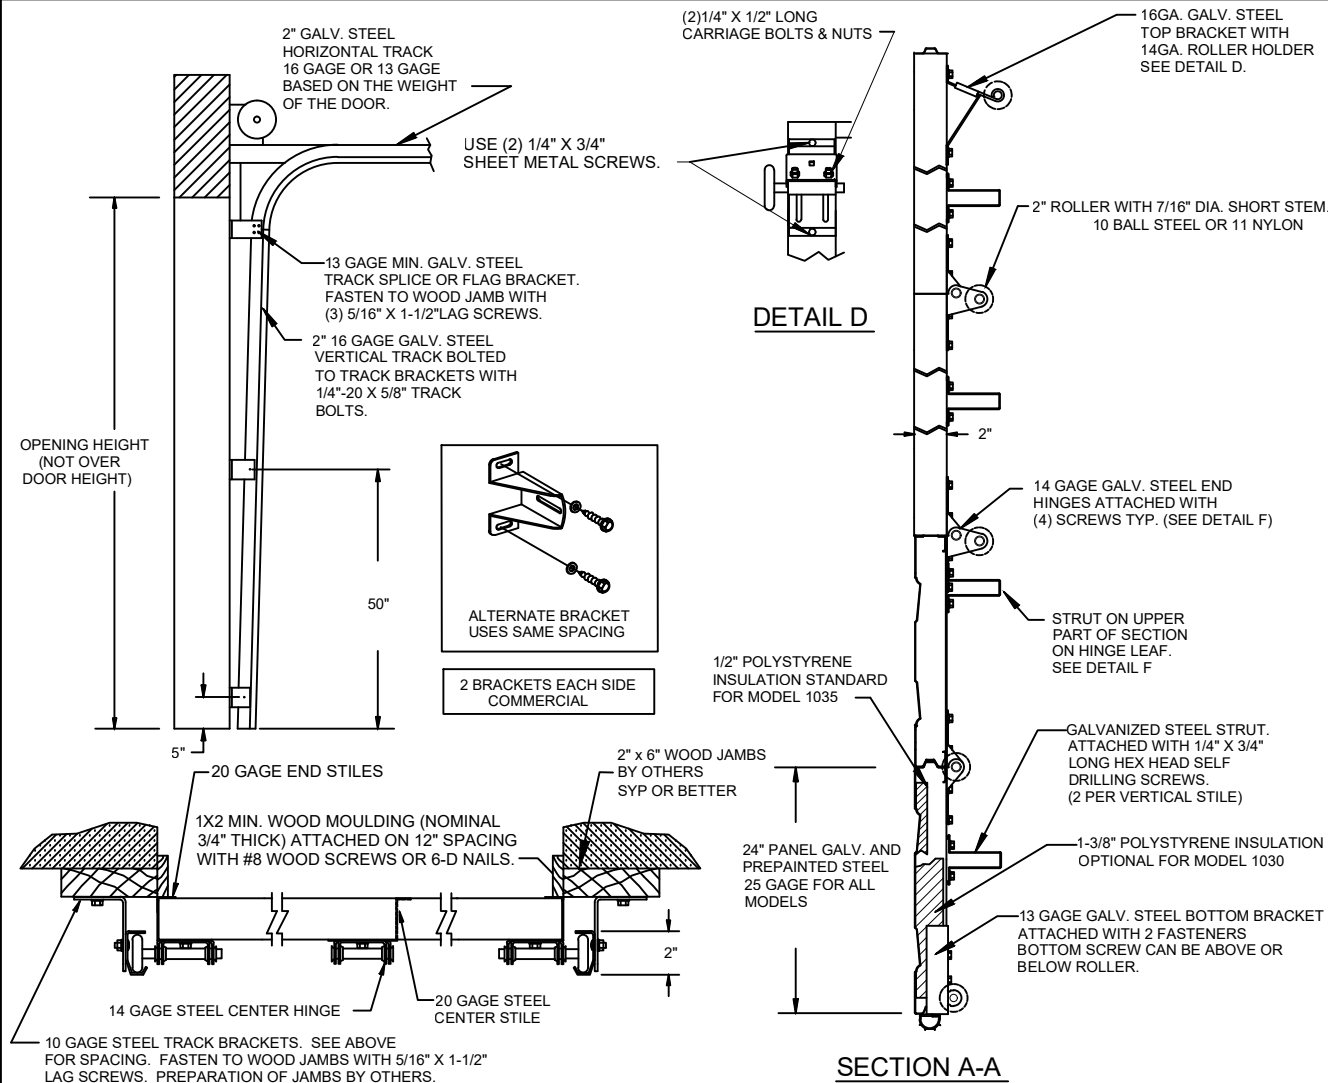

SECTION B-B



DOOR SIZE		P.S.F. TABLE	
		DESIGN PRESSURE	
WIDTH	HEIGHT	POSITIVE	NEGATIVE
9'-0"	8'-0"	+24.4	-27.5

USE COATED LAG SCREWS FOR TREATED LUMBER

TRACK BRACKETS MUST BE MOUNTED DIRECTLY TO A WOOD SURFACE

NOTE: ALL NON-DESCRIPTIVE FASTENERS SHOWN TO BE 1/4"-20 X 5/8" HEX BOLTS & NUTS OR 1/4" X 3/4" LONG HEX HEAD SHEET METAL SCREWS.

Digitally signed by John E Scates
Date: 2025.11.23 20:24:27 -06'00'



DOORS SHOWN ON THIS DRAWING HAVE BEEN DEMONSTRATED TO WITHSTAND THE PRESSURES LISTED IN THE TABLE ABOVE VIA TESTING TO DASMA 108. COMPLIES WITH FBC (CURRENT EDITION). COMPLIES WITH IBC/IRC 2018 & 2021. DETERMINATION OF SUITABILITY FOR SPECIFIC SITES IS THE RESPONSIBILITY OF OTHERS.

John E Scates PE
8811 Teel Pkwy # 100-5175
Frisco, TX 75036
TX-PE 56308, F-2203
FL-PE-51737

Professional Engineer's seal provided only for verification of windload construction details.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

					WINDSOR DOOR	5800 SCOTT HAMILTON DR. LITTLE ROCK, AR 72209 (501) 562-1872								
				MODELS:					1030, 1035					
					PART NAME:									
					WINDLOAD RESIDENTIAL PAN DOOR W3 B									
					NEXT LEVEL		DATE: 7/9/24		DWG. NO. WL-024					
					SCALE NONE		PLOT SCALE		DRN. BY J.G.		SHEET 1 OF 1			
					</									