

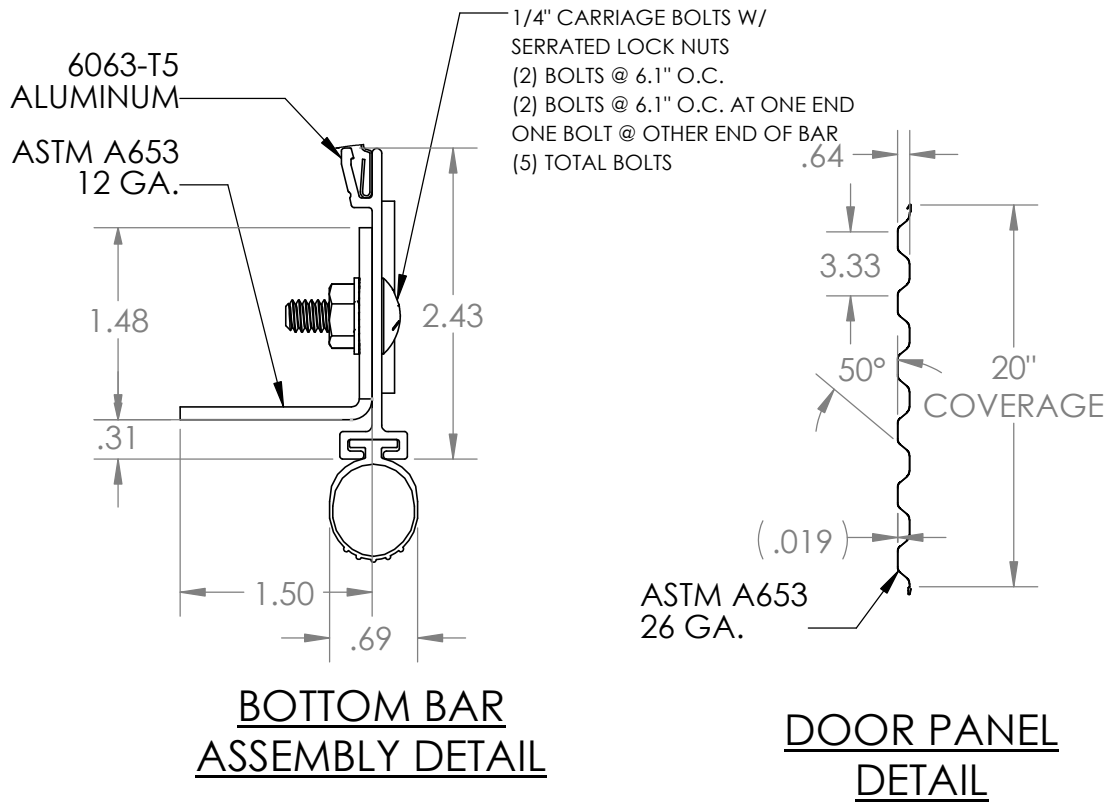


MINIMUM HEADROOM CLEARANCE FOR CRD-YYY-XXX	L1	L2	L3
FOR XXX <= 96	16"	18"	6"
FOR XXX > 96	18"	20"	

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A4	UPDATED TO REFLECT LATEST TESTING	03/06/2025	K.WATSON

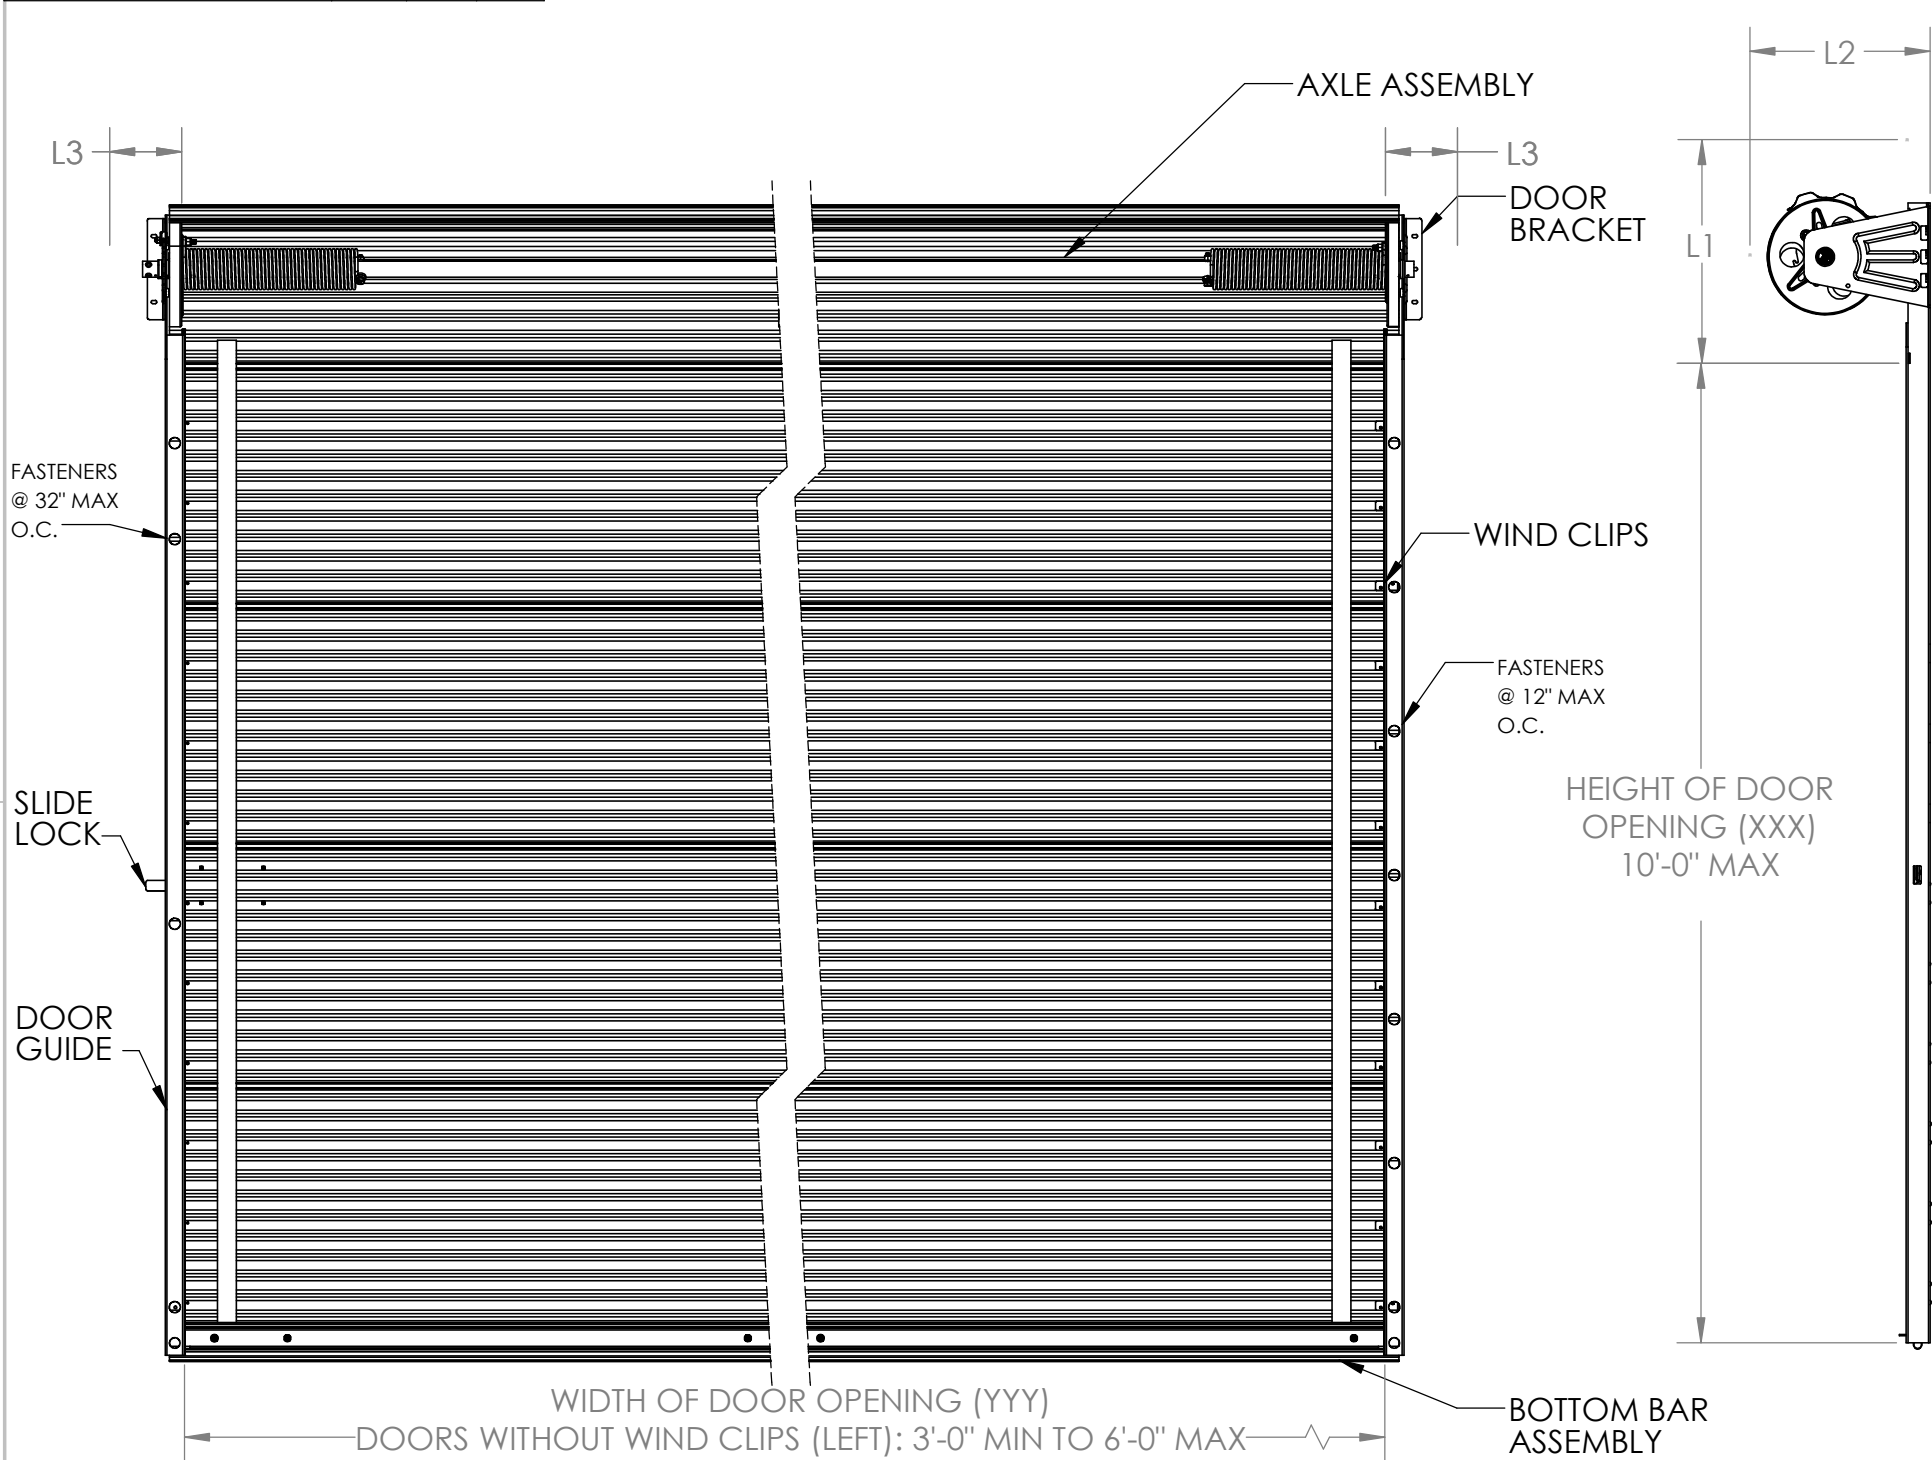

DOOR WIDTH	DESIGN PRESSURE (PSF)
3'-0"	+40.0/-51.0
3'-6"	+35.2/-44.8
4'-0"	+31.7/-40.1
5'-0"	+26.6/-31.1
6'-0"	+23.3/-29.2
*7'-0"	+33.2/-36.8
*8'-0"	+29.0/-32.2
*8'-8"	+26.8/-29.7
*9'-0"	+25.0/-27.0
*10'-0"	+19.4/-22.7

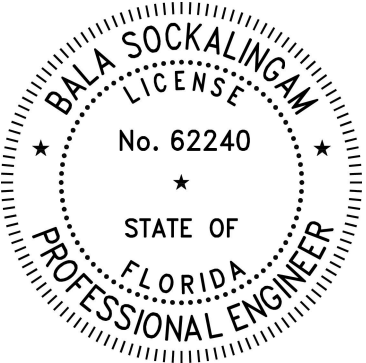

*REQUIRES WIND CLIPS

This item has been digitally signed and sealed by Bala Sockalingam, PE, on the date indicated.


Printed copies of this document are not considered signed and sealed and this signature must be verified on any electronic copies.

2026.10.15
08:29:59 -04'00'


NOTES:
1. PARENTHESES DENOTE REFERENCE DIMENSIONS

	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CENTRAL STATES MANUFACTURING INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CENTRAL STATES MANUFACTURING INC. IS PROHIBITED.	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES DECIMAL TOLERANCES: X.X ±0.125 X.XX ±0.060 X.XXX ±0.030 ANGULAR: ±2°	INTERPRET TOLERANCING PER: ASME Y14.5	MATERIAL: VARIES	FINISH: VARIES	PART NUMBER: MODEL 7500			REV: A4		
						DESCRIPTION: MODEL 7500 HIGH WIND RATED ROLL-UP DOOR			DO NOT SCALE DRAWING		
						SCALE: 1:16			SHEET 1 OF 3		
						DATE 01/22/2025			NAME K.WATSON		


B

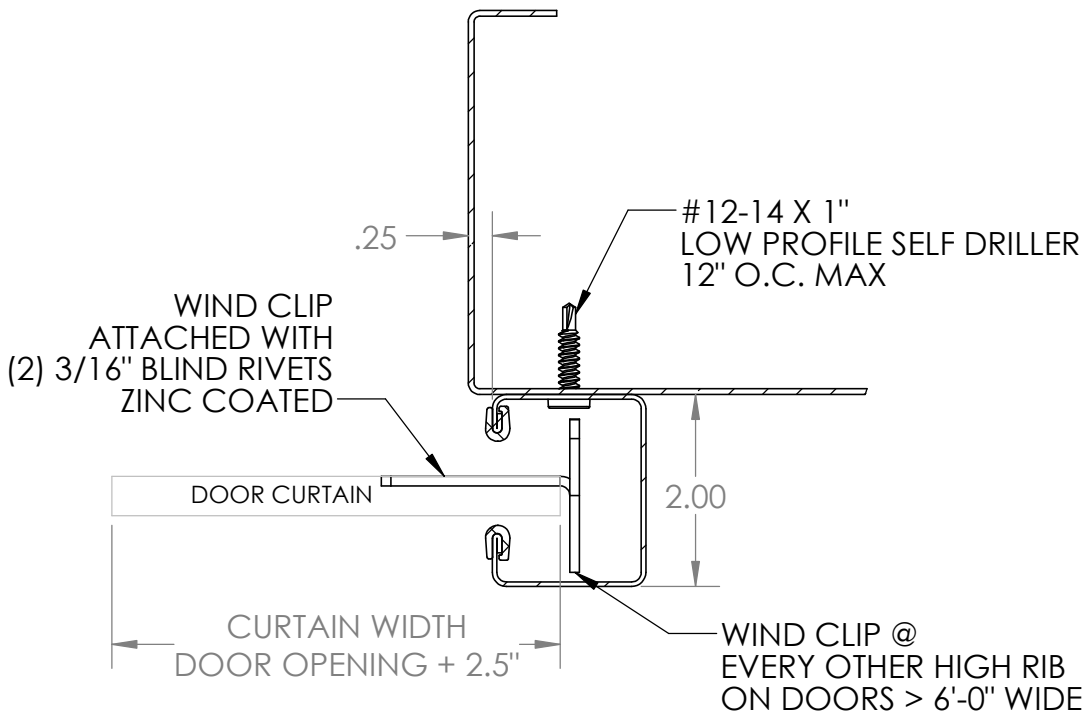

DOOR GUIDE TO STEEL JAMB
FOR DOOR WIDTHS > 6'-0"

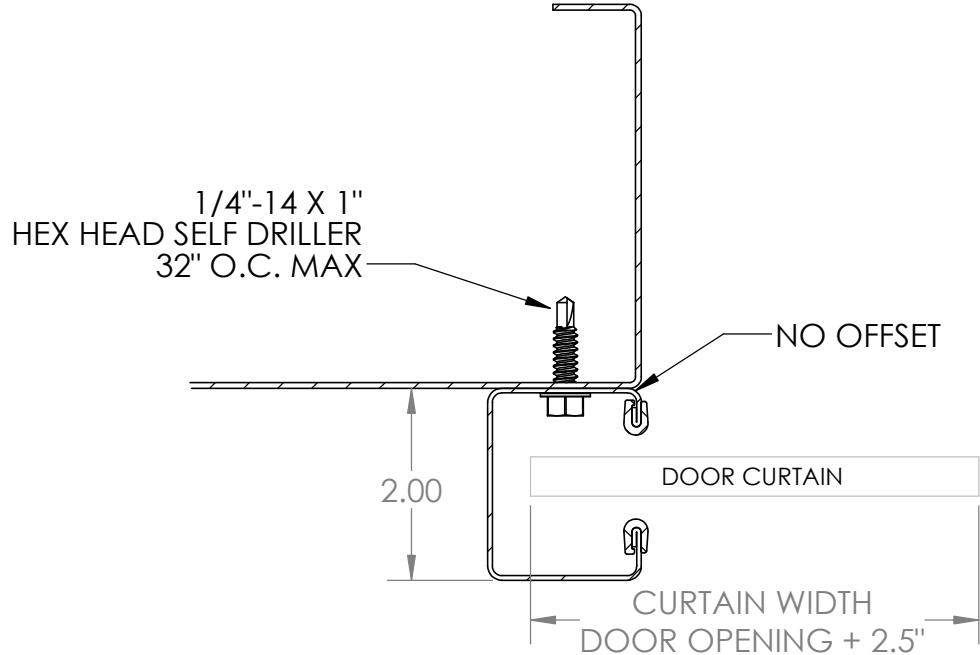


DOOR GUIDE TO STEEL JAMB
FOR DOOR WIDTHS ≤ 6'-0"

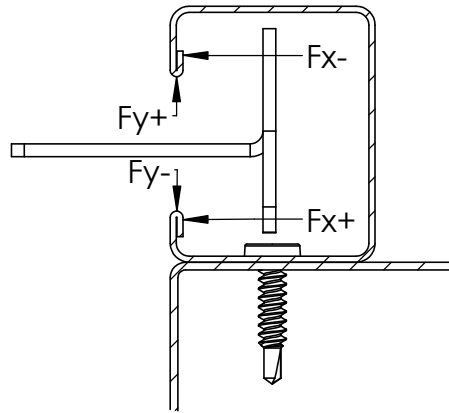


DOOR GUIDE FORCE

WIDTH	MAX REACTION (PFL)			
	Fy+	Fy-	Fx+	Fx-
3'-0"	60.0	-76.5	N/A	
3'-6"	61.6	-78.4		
4'-0"	63.4	-80.2		
5'-0"	66.5	-77.8		
6'-0"	69.9	-87.6		
7'-0"	116.2	-128.7	37.5	-79.7
8'-0"	116.2	-128.7	87.3	-133.1
8'-8"	116.2	-128.7	153.7	-200.5
9'-0"	112.5	-121.5	151.6	-185.8
10'-0"	97.0	-113.5	97.6	-163.6

A

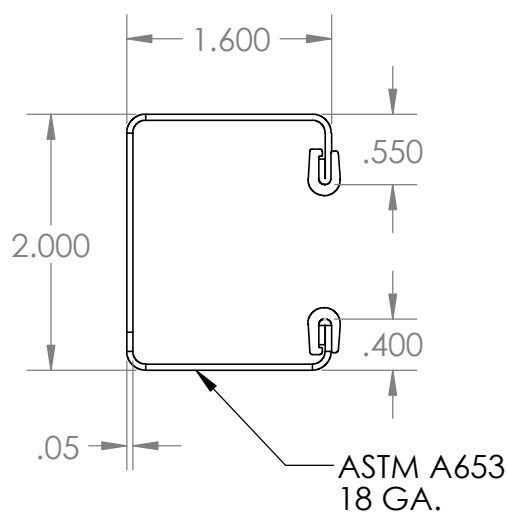

DOOR GUIDE
DETAIL

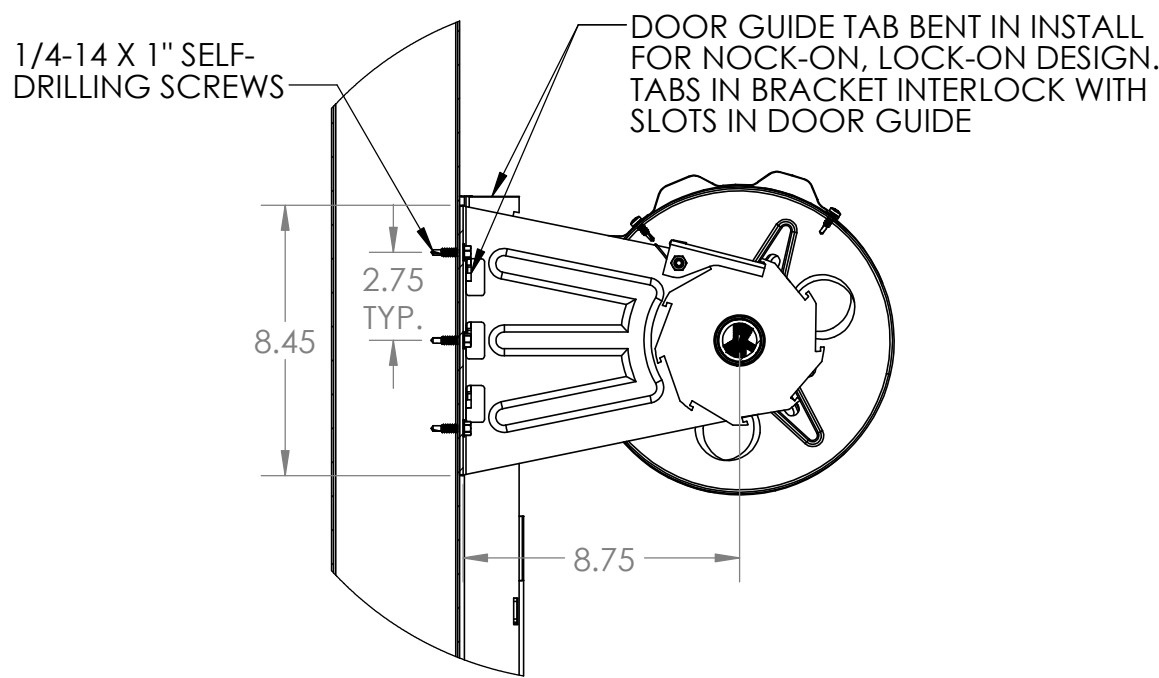

DOOR BRACKET TO STEEL JAMB

B



A

4





3

2

1

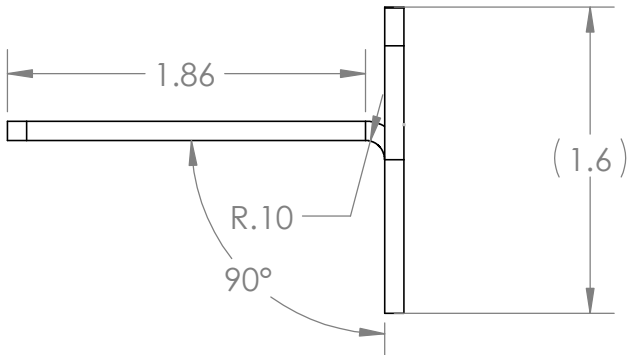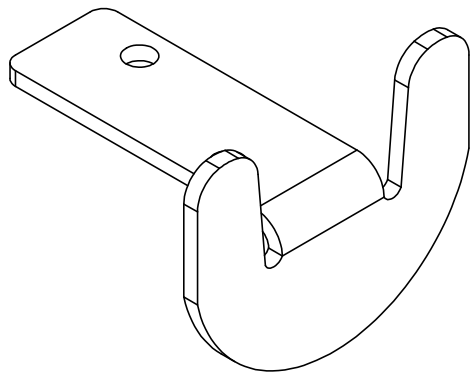

ATTACHED WITH
MIN. (2) 3/16" BLIND
RIVETS

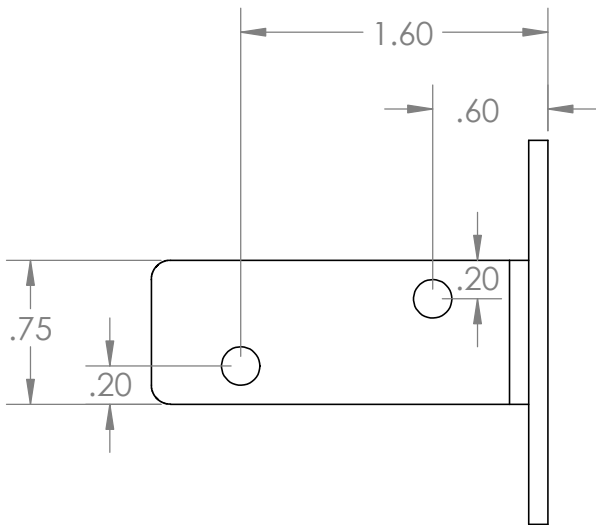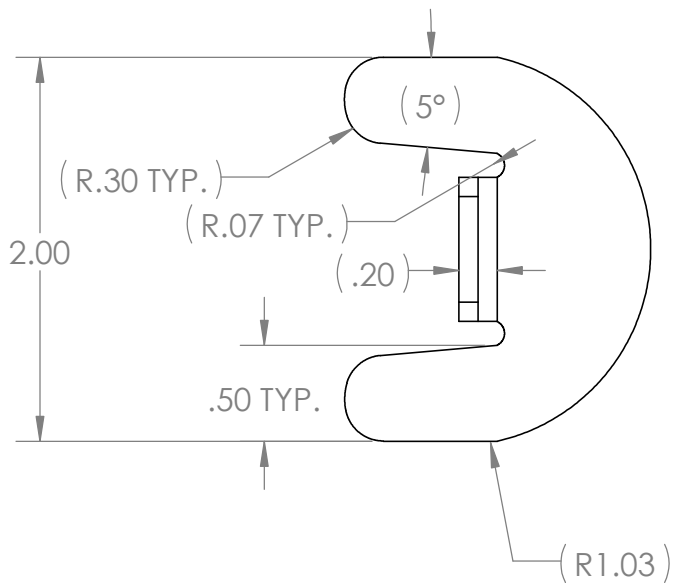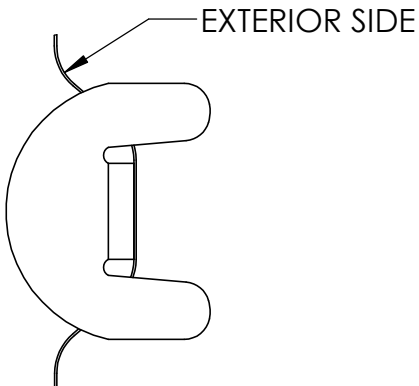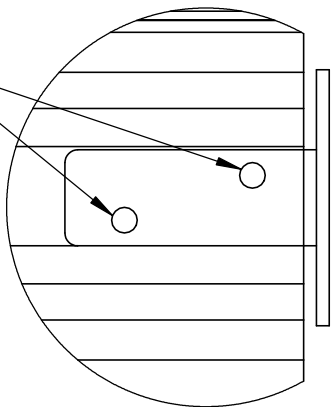

WIND CLIPS PLACED EVERY OTHER RIB, STARTING AT THE FIRST RIB ABOVE BOTTOM BAR. (4) PANELS HAVE CLIPS ATTACHED FOR 7'-0" TALL DOORS, (5) PANELS HAVE CLIPS ATTACHED FOR 8'-10' TALL DOORS. ON LEFT SIDE OF DOOR, ONE CLIP IS MOVED DOWN ONE RIB TO CLEAR THE LATCH.

WIND CLIP ATTACHMENT

WIND CLIP

ASTM A653 12 ga.
GRADE 33 MIN
OR EQUIVALENT



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
CENTRAL STATES MANUFACTURING INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
CENTRAL STATES MANUFACTURING INC. IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
DECIMAL TOLERANCES:
X.X ±0.125
X.XX ±0.060
X.XXX ±0.030
ANGULAR: ±2°
INTERPRET TOLERANCING PER: ASME Y14.5

MATERIAL:
VARIES

FINISH:
VARIES

	NAME	DATE
DRAWN	K.WATSON	01/22/2025
CHECKED		
ENG APPR.	K.WATSON	01/22/2025

PART NUMBER:

MODEL 7500

REV:

A4

DESCRIPTION:

MODEL 7500 HIGHT WIND RATED ROLL-UP DOOR

DO NOT SCALE
DRAWING

SCALE: 1:1

SHEET 3 OF 3

4

3

2

1