EVALUATION REPORT

FLORIDA BUILDING CODE, 9TH EDITION (2026)

Issued August 11, 2026

Manufacturer: DREXEL METALS, INC.
1234 Gardiner Lane
Louisville, KY 40213
(502) 716-7143
www.drexmet.com

Manufacturing: Port St. Lucie, FL

Quality Assurance: Architectural Testing, Inc., An Intertek Company (QUA1844)

SCOPE

Category: Roofing
Subcategory: Metal Roofing
Code Edition: Florida Building Code, 9th Edition (2026) High-Velocity Hurricane Zones (HVHZ)
Code Sections: 1518.9.1, 1523.1.1, 1523.6.5, 1523.6.5.2.4, 1523.6.5.2.4.1
Properties: Wind Resistance

REFERENCES

Entity	Report No.	Standard	Year
Architectural Testing (TST1558)	D9330.03-450-18	TAS 125	2003
Architectural Testing (TST1558)	C8008.01-450-18	TAS 125	2003
Architectural Testing (TST1558)	C8009.01-450-18	TAS 125	2003
Architectural Testing (TST1558)	B3862.01-450-18	TAS 125	2003
Architectural Testing (TST1558)	D0841.01-450-18	TAS 125	2003
Architectural Testing (TST1558)	B8437.02-450-18	TAS 125	2003
Architectural Testing (TST1558)	B8437.01-450-18	TAS 125	2003
Architectural Testing (TST1558)	B8438.02-450-18	TAS 125	2003
Architectural Testing (TST1558)	73784.01-109-18	TAS 100	2023
Architectural Testing (TST1558)	73913.01-109-18	TAS 100	2023
Architectural Testing (TST1558)	D9330.03-450-48	TAS 100	2023
Architectural Testing, Inc (an Intertek Company) (TST1527)	F8542.01-450-44	UL 580	2006
		UL 1897	2015
Architectural Testing, Inc (an Intertek Company) (TST1527)	G1899.01-450-18	UL 580	2006
		UL 1897	2015
Architectural Testing, Inc (an Intertek Company) (TST1527)	F0755.01-450-18	TAS 125	2003
Architectural Testing, Inc (an Intertek Company) (TST1527)	F9156.01-450-18	TAS 125	2003
Architectural Testing, Inc (an Intertek Company) (TST1527)	F9156.02-450-18	TAS 125	2003
Architectural Testing, Inc (an Intertek Company) (TST1527)	0412-1012-06	TAS 125	2003
Architectural Testing, Inc (an Intertek Company) (TST1527)	D4563.01-450-18	TAS 100	2023
Architectural Testing, Inc (an Intertek Company) (TST1527)	D956.03-450-18	TAS 100	2023
Architectural Testing, Inc (an Intertek Company) (TST1527)	F9156.03-450-18	TAS 100	2023
Architectural Testing (TST1558)	C6413.02-450-18	TAS 125	2003
Architectural Testing (TST1558)	D6207-01-450-18	TAS 125	2003
Architectural Testing (TST1558)	0412-0621-07	TAS 100	2023
Architectural Testing (TST1558)	C6413.01-450-18	TAS 100	2023
Farabaugh Engineering (TST1654)	T157-07	TAS 100	2023
Farabaugh Engineering (TST1654)	T349-07	TAS 100	2023
Fenestration Testing Lab (TST1657)	13-852	TAS 100	2023
Force Engineering & Testing (TST5328)	72-019T0T-07	UL 580	2006
		UL 1897	2015
Force Engineering & Testing (TST5328)	72-0314T-06A-C	UL 580	2006
		UL 1897	2015
Force Engineering & Testing (TST5328)	72-0313T-06A-C	UL 580	2006
		UL 1897	2015
Hurricane Test Laboratory (TST1527)	0412-1203.07	TAS 125	2003
Hurricane Test Laboratory (TST1527)	0412-1017-05	TAS 125	2003

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

Entity	Report No.	Standard	Year
Hurricane Test Laboratory (TST1527)	0412-01012-06	TAS 125	2003
Hurricane Test Laboratory (TST1527)	0412-0305-07	TAS 125	2003
Hurricane Test Laboratory (TST1527)	0412-0306-06	TAS 125	2003
PRI Construction Materials Technologies (TST1657)	SFMS-001-02-01	TAS 100	2023
PRI Construction Materials Technologies (TST1657)	SFMS-002-02-01	TAS 100	2023
PRI Construction Materials Technologies (TST1657)	SFMS-003-02-01	TAS 100	2023
PRI Construction Materials Technologies (TST1657)	SFMS-004-02-01	TAS 100	2023
PRI Construction Materials Technologies (TST5878)	VLS-005-02-01	ASTM B 117	2016
		TAS 110	2000
PRI Construction Materials Technologies (TST5878)	VLS-004-02-01	ASTM G 155	2021
		TAS 110	2000
UL LLC (TST9628)	02NK11243	UL 580	2006
		UL 1897	2015
UL LLC (TST9628)	03NB13142	UL 580	2006
		UL 1897	2015

PRODUCT DESCRIPTION

1.5" Mechanical Lock	**Profile:**	1.5-inch mechanical seam; Max.20-inch coverage
	Description:	Non-structural, min. 180° mechanical lock standing seam roof panel;
	Material:	Min. 24 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 50 ksi); Material has demonstrated compliance with 1518.9
	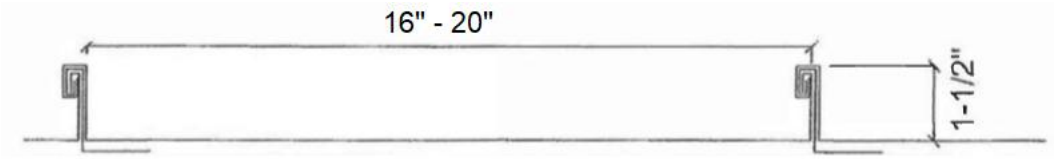	
1.5" Nail Strip	**Profile:**	1.5-inch snap lock seam; Max.15.5-inch coverage
	Description:	Non-structural, snap lock standing seam roof panel; slotted nail strip;
	Material:	Min. 24 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 50 ksi); Material has demonstrated compliance with 1518.9
	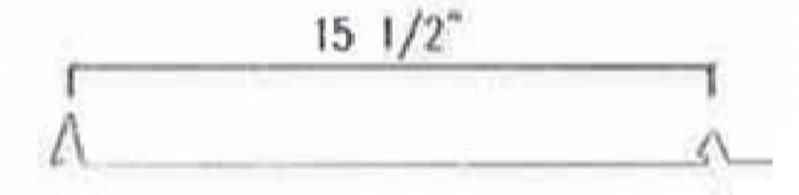	
5-V-Crimp	**Profile:**	⅜-inch ribs; Min. 20.5-inch, Max. 24-inch coverage
	Description:	Non-structural, through fastened roof panel
	Material:	Min. 0.032-inch Fluropon® coated ASTM B209 aluminum (F_y = min. 23 ksi); Material has demonstrated compliance with 1518.9
		

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

PAC-150	**Profile:**	1.5-inch mechanical seam; Max.20-inch coverage
	Description:	Non-structural, min. 90° mechanical lock standing seam roof panel;
	Material:	Min. 0.032-inch Fluropon® coated ASTM B209 aluminum (F_y = min. 22 ksi); Material has demonstrated compliance with 1518.9
		Min. 24 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 55 ksi); Material has demonstrated compliance with 1518.9
	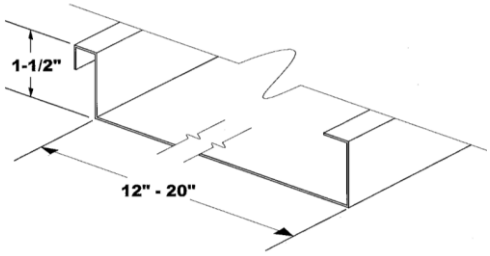	
Snap-Clad	**Profile:**	1.75-inch snap lock seam; Max. 18-inch coverage
	Description:	Non-structural, snap lock standing seam roof panel;
	Material:	Min. 0.032-inch Fluropon® coated ASTM B209 aluminum (F_y = min. 25 ksi); Material has demonstrated compliance with 1518.9
	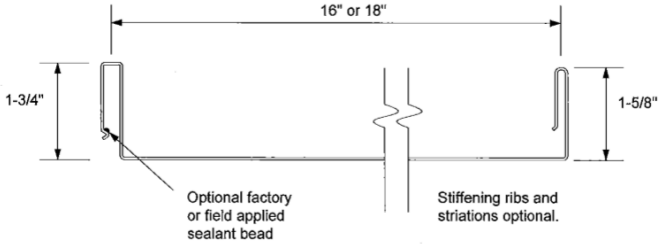	
Tite-Loc Plus	**Profile:**	2-inch mechanical seam; Max.18-inch coverage
	Description:	Non-structural, min. 180° mechanical lock standing seam roof panel;
	Material:	Min. 24 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 60 ksi); Material has demonstrated compliance with 1518.9
		Min. 0.032-inch Fluropon® coated ASTM B209 aluminum (F_y = min. 20 ksi); Material has demonstrated compliance with 1518.9
	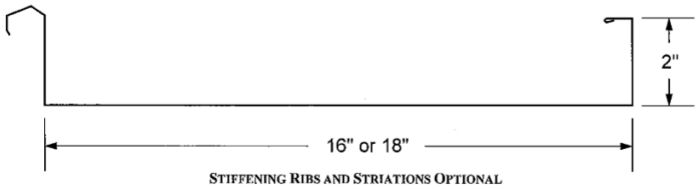	

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

Jacksonville Beach Series 1.5" Clipless	**Profile:**	1.5-inch snap lock seam; Max.19-inch coverage
	Description:	Non-structural, snap lock standing seam roof panel; slotted nail strip;
	Material:	Min. 24 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 50 ksi); Material has demonstrated compliance with 1518.9
		Min. 0.032-inch Fluropon® coated ASTM B209 aluminum (F_y = min. 21 ksi); Material has demonstrated compliance with 1518.9
	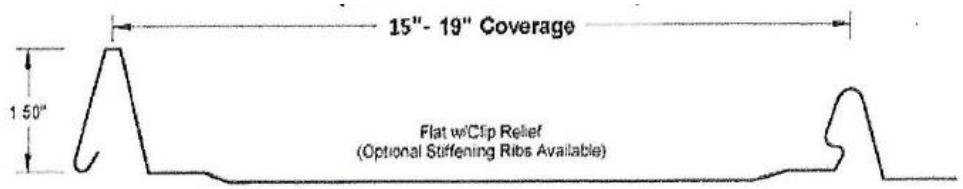	
Miami Series 1.75 Snap Lock	**Profile:**	1.75-inch snap lock seam; Max. 18-inch coverage
	Description:	Non-structural, snap lock standing seam roof panel;
	Material:	Min. 24 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 50 ksi); Material has demonstrated compliance with 1518.9
		Min. 0.032-inch Fluropon® coated ASTM B209 aluminum (F_y = min. 24 ksi); Material has demonstrated compliance with 1518.9
	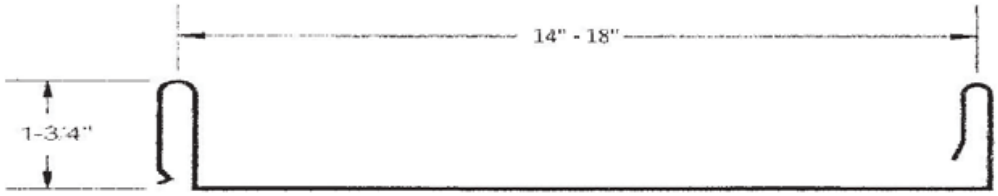	
Palm Beach Series 1.5 Mechanical Seam	**Profile:**	1.5-inch mechanical seam; Max.20-inch coverage
	Description:	Non-structural, min. 90° mechanical lock standing seam roof panel;
	Material:	Min. 24 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 50 ksi); Material has demonstrated compliance with 1518.9
		Min. 0.032-inch Fluropon® coated ASTM B209 aluminum (F_y = min. 24 ksi); Material has demonstrated compliance with 1518.9
Key West Series 5-V Crimp	**Profile:**	½-inch ribs; Max. 24-inch coverage
	Description:	Non-structural, through fastened roof panel
	Material:	Min. 26 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 50 ksi); Material has demonstrated compliance with 1518.9
	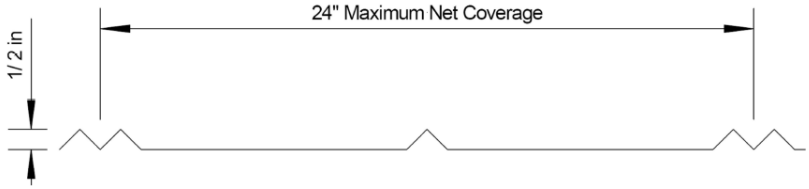	

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

Stuart Line Series 1" Nail Strip	**Profile:**	1-inch snap lock seam; Max.16-inch coverage
	Description:	Non-structural, snap lock standing seam roof panel; slotted nail strip;
	Material:	Min. 24 ga. Fluropon® coated ASTM A792 AZ50, or ASTM A653 G90 steel (F_y = min. 50 ksi); Material has demonstrated compliance with 1518.9



This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

LIMITATIONS

1. This report is for use inside the HVHZ only.
2. Fire classification is not within the scope of this evaluation.
3. The roof deck and the roof deck attachment information are provided based on testing. FBC requirements for the rational design of the roof deck, including the attachment, are not within the scope of this evaluation.
4. Roof slope shall be 2:12 or greater.
5. Reroofing shall be in accordance with Section 1521.
6. Installation of the evaluated products shall comply with this report, RAS 133, and the manufacturer's published application instructions. Where discrepancies exist between these sources, the more restrictive and FBC compliant installation detail shall prevail.
7. Materials shall conform to FBC Sections 1517 and 1711.
8. All products listed in this report shall be manufactured under a quality assurance program in compliance with Rule 61G20-3.

COMPLIANCE STATEMENT

This report has been prepared in accordance with F.A.C. Rule 61G20-3.

This item has been digitally signed and sealed by Zachary R. Priest, PE, on 8/11/2026.

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

Digitally signed by Zachary R. Priest
2026.08.11 13:24:55 -04'00'

Zachary R. Priest, P.E.
Florida Registration No. 74021
Organization No. ANE9641

CERTIFICATION OF INDEPENDENCE

CREEK Technical Services, LLC does not have, nor will it acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

CREEK Technical Services, LLC is not owned, operated, or controlled by any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any company manufacturing or distributing products under this evaluation.

Zachary R. Priest, P.E. does not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.

APPENDICES

1) APPENDIX A – Installation (2 pages)
2) APPENDIX B – Approved Roof Systems (7 pages)
3) APPENDIX C – Design Wind Loads (3 pages)

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

INSTALLATION

Note - Refer to the ***APPROVED ROOF SYSTEMS*** *section of this report for specific installation details of a selected system.*

Unless otherwise specified in this report the following installation details shall be met for the named products:

Component	Product	Installation Detail
Fasteners	#9-15 HWH wood screw with sealing washer	Shall penetrate through the sheathing a minimum 3/8 in. Must be corrosion resistant in accordance with FBC section 1517.5
	#10 HWH wood screw with sealing washer	
	#10 PH wood screw	
	#10-11 Eclipse Head wood screw with sealing washer	
	#10-13 PH wood screw	
	#12-11 PH wood screw	
	#14 WoodZAC® HWH screws	
	#14-13 TH wood screw	
	#14 PH self-drilling screw	Shall penetrate through the top rib of the steel deck a minimum 3/4 in. Must be corrosion resistant in accordance with FBC section 1517.5
Clips	1500SC 1.5-inch Sliding Clip	26 ga. top with 22 ga. base galvanized steel, in-seam clip
	24 ga. PAC-150 Clip	24 ga. galvanized or stainless steel in-seam clip 
	20 ga. Snap-Clad Clip	20 ga. galvanized or stainless steel in-seam clip 
	20 ga. Snap-Clad Continuous Clip	20 ga. galvanized or stainless steel in-seam clip 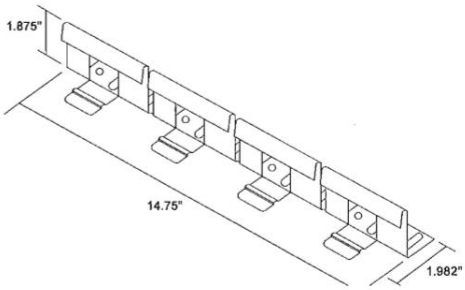

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

APPENDIX A

Component	Product	Installation Detail
Clips	Tite-Loc Plus Clip	18 ga. base/22 ga. tab galvanized or stainless steel in-seam clip 
	Miami Series 1.75 Snap Lock Clip	0.050-inch galvanized steel in-seam clip 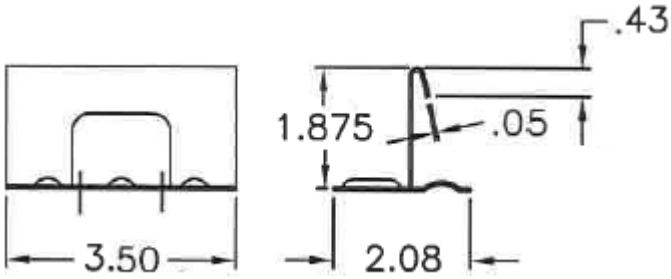
	Palm Beach Series 1.5 Mechanical Seam Clip	24 ga. galvanized steel in-seam clips 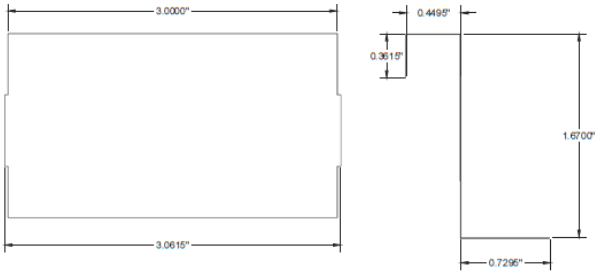
Sealants	Bostik Chem Calk 915	Shall be applied in ⅛-inch wide continuous beads along the seam
	Bostik 70-05A	

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

APPROVED ROOF SYSTEMS

The following notes shall be observed when using the assembly tables below.

1. Maximum Design Pressure (*MDP*) was calculated using a 2:1 margin of safety per FBC Section 1523.4.
2. Refer to **LIMITATIONS** and sections of this evaluation when using the table(s) below.
3. Refer to **INSTALLATION** section of this report for installation detail when the information is not explicitly stated for the selected assembly.
4. The on-center (o.c.) spacing given is the maximum allowable attachment spacing for the rated system.
5. Underlayment shall be installed in accordance with FBC requirements. The minimum underlayment shall be ASTM D 226, Type II installed as described in FBC Section 1518.2.1 with nails and tin caps per 1517.5.
6. Steel Deck shall be designed by others in accordance with FBC requirements and shall be minimum 22 ga (F_y = min.40 ksi) Wide Rib Deck (Type WR) conforming to ANSI/SDI-RD1.0 & FBC. In no case shall the panels be installed on less than two continuous spans, which are spaced a maximum 5-ft o.c. At minimum, the deck shall be attached with one (1) #12 x 1.5-inch HWH self-drilling screws at the bottom of each flute (maximum. 6-inch o.c. along the support). At minimum, the deck side laps shall be fastened a maximum 6-inch o.c. with #12 x 1.5-inch HWH self-drilling screws.
7. Wood Deck shall be designed by others in accordance with FBC requirements and shall be minimum 19/32-inch thick 40/20 span rated, CDX plywood sheathing or wood plank at maximum 24-inch span for new construction. Existing construction shall be the minimum plywood sheathing or wood plank thickness at maximum 24-inch span as stated in the approval tables on following pages. In no case shall the attachment be less than 8d ring shank nails spaced 6-inch o.c.

Roof System Numbers and Definitions	
1.5ML-W#	1.5 Mechanical Lock over Wood Deck (New or Existing)
1.5NS-W#	1.5 Nail Strip over WoodDeck (New or Existing)
5VC-W#	5-V-Crimp over Wood Deck (New or Existing)
PC150-W#	PAC-150 over Wood Deck (new or Existing)
SC-W#	Snap-Clad over Wood Deck (New or Existing)
TLP-W#	Tite-Loc Plus over Wood Deck (New or Existing)
TLP-S#	Tite-Loc Plus over Steel Deck (New or Existing)
J1.5C-W#	Johnsonville Beach Series 1.5” Clipless over Wood Deck (New or Existing)
M1.75-W#	Miami Series 1.75 Snap Lock over Wood Deck (New or Existing)
P1.5M-W#	Palm Beach Series 1.5 Mechanical Seam over Wood Deck (New or Existing)
K5VC-W#	Key West Series 5-V Crimp over Wood Deck (New or Existing)
S1NS-W#	Stuart Line Series 1” Nail Strip over Wood Deck (New or Existing)

Approved Systems for 1.5 Mechanical Lock over Wood Deck (New or Existing)

System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
1.5ML-W1	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. 1.5 Mechanical Lock Max. 16-inch wide	1500SC 1.5-inch Sliding Clip with two (2) #12-11 PH wood screws spaced 24-inch o.c.	**-59.75**

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

Approved Systems for 1.5 Mechanical Lock over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
1.5ML-W2	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. 1.5 Mechanical Lock Max. 16-inch wide	1500SC 1.5-inch Sliding Clip with two (2) #12-11 PH wood screws spaced 6-inch o.c.	**-123.5**

Approved Systems for 1.5 Nail Strip over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
1.5NS-W1	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. 1.5 Nail Strip Max. 15.5-inch wide	One (1) #12-11 PH wood screws spaced 11-inch o.c. along the nail strip	**-78.5**

Approved Systems for PBR or Econo Line PBR over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
PBR-W1	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	26 ga. PBR Max. 36-inch wide	One (1) #9-15 HWH wood screw with sealing washer placed 1.5-inches from each side of panel lap and one (1) #9-15 HWH wood screw and sealing washer placed 1.5-inches to one side of the each intermediate rib (5 fasteners per panel; 6”-9”-9”-9”-3” pattern); Fastener rows spaced 24-inch o.c.	**-76.75**

Approved Systems for 5-V-Crimp over Wood Deck (New or Existing) – Install in compliance with PAC Contractors Association’s Installation Details						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
5VC-W1	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al 5-V-Crimp Max. 24-inch wide	One (1) #10 HWH wood screw with sealing washer placed through the apex of the inside rib at the panel lap; Fastener rows spaced 16-inch o.c.	**-74.75**

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

Approved Systems for 5-V-Crimp over Wood Deck (New or Existing) – Install in compliance with PAC Contractors Association's Installation Details						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
5VC-W2	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al 5-V-Crimp Max. 24-inch wide	One (1) #10 HWH wood screw with sealing washer placed through the apex of the inside rib at the panel lap; Fastener rows spaced 8-inch o.c.	**-176**

Approved Systems for PAC-150 over Wood Deck (New or Existing) – Install in compliance with PAC Contractors Association's Installation Details						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
PC150-W1	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al PAC-150 Max. 20-inch wide 90° seam	24 ga. PAC-150 Clip with two (2) #10 PH wood screws spaced 24-inch o.c.	**-69.25**
PC150-W2	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al PAC-150 Max. 20-inch wide 90° seam	24 ga. PAC-150 Clip with two (2) #10 PH wood screws spaced 24-inch o.c.	**-69.25**
PC150-W3	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al PAC-150 Max. 20-inch wide 90° seam	24 ga. PAC-150 Clip with two (2) #10 PH wood screws spaced 6-inch o.c.	**-99.25**
PC150-W4	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. PAC-150 Max. 20-inch wide 90° seam	24 ga. PAC-150 Clip with two (2) #10 PH wood screws spaced 6-inch o.c.	**-114.25**
PC150-W5	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. PAC-150 Max. 20-inch wide 180° seam	24 ga. PAC-150 Clip with two (2) #10 PH wood screws spaced 12-inch o.c.	**-136.75**
PC150-W6	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al PAC-150 Max. 20-inch wide 180° seam	24 ga. PAC-150 Clip with two (2) #10 PH wood screws spaced 12-inch o.c.	**-166.75**

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

APPENDIX B

Approved Systems for Snap-Clad over Wood Deck (New or Existing) – Install in compliance with PAC Contractors Association's Installation Details						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
SC-W1	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al Snap-Clad Max. 18-inch wide	24 ga. Snap-Clad Clip with two (2) #10 PH wood screws spaced 24-inch o.c.	**-86**
SC-W2	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al Snap-Clad Max. 18-inch wide	24 ga. Snap-Clad Continuous Clip with eight (8) #10 PH wood screws per clip installed end-to-end to form a continuous clip along the seam	**-151.75**

Approved Systems for Tite-Loc Plus over Wood Deck (New or Existing) – Install in compliance with PAC Contractors Association's Installation Details						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
TLP-W1	Min. 19/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. Tite-Loc Plus Max. 18-inch wide	Tite-Loc Plus Clip with two (2) #10 PH wood screws spaced 24-inch o.c.	**-106.75**
TLP-W2	Min. 19/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al Tite-Loc Plus Max. 18-inch wide	Tite-Loc Plus Clip with two (2) #10 PH wood screws spaced 24-inch o.c.	**-121.75**
TLP-W3	Min. 19/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al Tite-Loc Plus Max. 18-inch wide	Tite-Loc Plus Clip with two (2) #10 PH wood screws spaced 6-inch o.c.	**-174.25**
TLP-W4	Min. 19/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. Tite-Loc Plus Max. 18-inch wide	Tite-Loc Plus Clip with two (2) #10 PH wood screws spaced 24-inch o.c.	**-196.75**

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

Approved Systems for Tite-Loc Plus over Steel Deck (New or Existing) – Install in compliance with PAC Contractors Association's Installation Details							
System No.	Deck	Fire Barrier	Insulation	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
TLP-S1	Min. 22 ga. steel deck	As required	Min. 3/4-inch *Approved* polyisocyanurate insulation board	As required per FBC	24 ga. Tite-Loc Plus Max. 18-inch wide	Tite-Loc Plus Clip with two (2) #14 PH self-drilling screws spaced 24-inch o.c.	**-106.75**
TLP-S2	Min. 22 ga. steel deck	As required	Min. 3/4-inch *Approved* polyisocyanurate insulation board	As required per FBC	24 ga. Tite-Loc Plus Max. 18-inch wide	Tite-Loc Plus Clip with two (2) #14 PH self-drilling screws spaced 24-inch o.c.	**-196.75**

Approved Systems for Jacksonville Beach Series 1.5" Clipless over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier/ Insulation	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
J1.5C-W1	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	.032 Al Jacksonville Beach Series 1.5" Clipless Max. 19-inch coverage	One (1) #10 PH wood screws spaced 6-inch o.c. along the nail strip; Bostik 70-05A applied to both sides of the male rib prior to seam engagement;	**-76.75**
J1.5C-W2	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	24 ga. Jacksonville Beach Series 1.5" Clipless Max. 19-inch coverage	One (1) #10 PH wood screws spaced 6-inch o.c. along the nail strip; Bostik 70-05A applied to both sides of the male rib prior to seam engagement;	**-97.25**
J1.5C-W3	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	.032 Al Jacksonville Beach Series 1.5" Clipless Max. 19-inch coverage	One (1) #10 PH wood screws spaced 3-inch o.c. along the nail strip; Bostik 70-05A applied to both sides of the male rib prior to seam engagement;	**-108.5**
J1.5C-W4	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	24 ga. Jacksonville Beach Series 1.5" Clipless Max. 19-inch coverage	One (1) #10 PH wood screws spaced 3-inch o.c. along the nail strip; Bostik 70-05A applied to both sides of the male rib prior to seam engagement;	**-161**

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

Approved Systems for Miami Series 1.75 Snap Lock over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier/ Insulation	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
M1.75-W1	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	.032 Al Miami Series 1.75 Snap Lock Max. 14-inch coverage	Miami Series 1.75 Snap Lock Clip with two (2) #10 PH wood screws spaced 12-inch o.c.	**-110.5**
M1.75-W2	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	24 ga. Miami Series 1.75 Snap Lock Max. 18-inch coverage	Miami Series 1.75 Snap Lock Clip with two (2) #10 PH wood screws spaced 16-inch o.c.	**-114.25**
M1.75-W3	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	.032 Al Miami Series 1.75 Snap Lock Max. 14-inch coverage	Miami Series 1.75 Snap Lock Clip with two (2) #10 PH wood screws spaced 6-inch o.c.	**-114.25**
M1.75-W4	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	24 ga. Miami Series 1.75 Snap Lock Max. 18-inch coverage	Miami Series 1.75 Snap Lock Clip with two (2) #10 PH wood screws spaced 8-inch o.c.	**-156.75**

Approved Systems for Palm Beach Series 1.5 Mechanical Seam over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
P1.5M-W1	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al Palm Beach Series 1.5 Mechanical Seam Max. 20-inch wide 90° seam	Palm Beach Series 1.5 Mechanical Seam Clip with two (2) #10 PH wood screws spaced 24-inch o.c.	**-63.5**
P1.5M-W2	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. Palm Beach Series 1.5 Mechanical Seam Max. 20-inch wide 90° seam	Palm Beach Series 1.5 Mechanical Seam Clip with two (2) #10 PH wood screws spaced 24-inch o.c.	**-93.5**
P1.5M-W3	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. Palm Beach Series 1.5 Mechanical Seam Max. 20-inch wide 90° seam	Palm Beach Series 1.5 Mechanical Seam Clip with two (2) #10 PH wood screws spaced 6-inch o.c.	**-101**
P1.5M-W4	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	24 ga. Palm Beach Series 1.5 Mechanical Seam Max. 20-inch wide 180° seam	Palm Beach Series 1.5 Mechanical Seam Clip with two (2) #10 PH wood screws spaced 6-inch o.c.	**-123.5**

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

Approved Systems for Palm Beach Series 1.5 Mechanical Seam over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
P1.5M-W5	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	.032 Al Palm Beach Series 1.5 Mechanical Seam Max. 20-inch wide 180° seam	Palm Beach Series 1.5 Mechanical Seam Clip with two (2) #10 PH wood screws spaced 6-inch o.c.	**-131**

Approved Systems for Key West Series 5-V Crimp over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
K5VC-W1	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	26 ga. 5-V-Crimp Max. 24-inch wide	One (1) #10 HWH wood screw with sealing washer placed through the apex of the inside rib at the panel lap and through the center rib of the panel (12-inch o.c. across the panel); Fastener rows spaced 16-inch o.c.	**-78.5**
K5VC-W2	Min. 15/32 CDX plywood	OPTIONAL Versashield Solo	As required per FBC	26 ga. 5-V-Crimp Max. 24-inch wide	One (1) #14 WoodZAC® HWH wood screw with sealing washer placed through the apex of the inside rib at the panel lap and through the center rib of the panel (12-inch o.c. across the panel); Fastener rows spaced 8-inch o.c.	**-106.75**

Approved Systems for Stuart Line Series 1” Nail Strip over Wood Deck (New or Existing)						
System No.	Deck	Fire Barrier/ Insulation	Underlayment	Roof Panel	Panel Attachment	*MDP* (psf)
S1NS-W1	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	24 ga. Stuart Line Series 1” Nail Strip Max. 16-inch coverage	One (1) #10 PH wood screws spaced 12-inch o.c. along the nail strip; Bostik Chem-Calk 915 applied along the fasteners prior to seam engagement;	**-91.25**
S1NS-W2	Min. 15/32 CDX plywood	OPTIONAL *Approved* fire barrier or insulation	As required per FBC	24 ga. Stuart Line Series 1” Nail Strip Max. 16-inch coverage	One (1) #10 PH wood screws spaced 6-inch o.c. along the nail strip; Bostik Chem-Calk 915 applied to top of male rib on fastening side prior to seam engagement;	**-136.75**

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

DESIGN WIND LOADS

The following tables provide design wind loads for components and cladding in accordance with Section 1620 of the FBC and ASCE 7-22 under the following provisions:

1. Wind speeds for risk category I, II, III, and IV buildings shall be as defined in Section 1620 of the FBC.
2. Exposure C and D shall be as defined in section 1620 of the FBC.
3. Design wind load provided only for gable/hip roofs with roof slopes between 2:12 and 6.1:12
4. All calculations are based on an effective wind area of 10-ft^2 or less.
5. Topographic factors such as escarpments or hills have been excluded from the analysis
6. Overhangs have been excluded from the analysis.
7. Wind directionality factor, K_d = 0.85
8. Ground elevation factor, K_e = 1.0
9. Design wind loads are calculated using $P_{asd} = 0.6P_{ult}$.
10. Zone 2 applies to Zone 3 for Hip Roofs where the slope is between 2:12 and 6.1:12
11. Projects with mean roof heights greater than 60-ft shall be evaluated by a licensed design professional
12. Zones 1, 2, and 3 shall be defined as shown below. Dimension "a" shall be 10% of the least horizontal dimension or (0.4 x *Mean Roof Height)*, whichever is smaller, but not less than either 4% of the least horizontal dimension or 3ft

Gable Roofs		Hip Roofs
Slopes 2:12 to 6.1:12	Slopes >6.1:12 to 12:12	Slopes 2:12 to 12:12

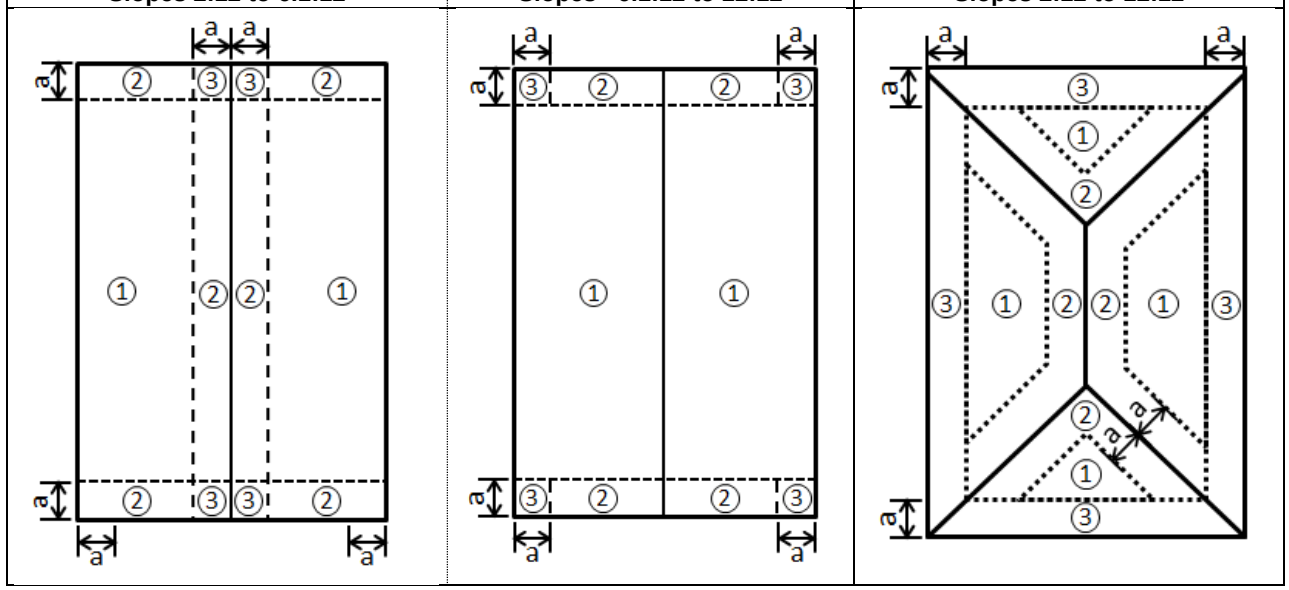

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

APPENDIX C

Gable/Hip Roofs in **Exposure C in Miami-Dade & Broward County** (Roof slopes between 2:12 and 12:12)								
Building Type	Zone	Mean Roof Height (ft)	Basic Wind Speed (mph)					
			Risk Cat I	Risk Cat I	Risk Cat II	Risk Cat II	Risk Cat III, IV	Risk Cat III,IV
			156	165	170	175	180	186
Enclosed/ Partially Open	1	20	-62.3	-69.7	-74.0	-78.5	-83.0	-88.6
		25	-65.4	-73.2	-77.7	-82.3	-87.1	-93.0
		30	-67.9	-76.0	-80.7	-85.5	-90.4	-96.6
		40	-72.0	-80.6	-85.5	-90.6	-95.9	-102.4
		50	-75.4	-84.3	-89.5	-94.9	-100.4	-107.2
		60	-78.2	-87.5	-92.9	-98.5	-104.2	-111.2
	2	20	-82.4	-92.1	-97.8	-103.6	-109.6	-117.1
		25	-86.4	-96.7	-102.7	-108.8	-115.1	-122.9
		30	-89.7	-100.4	-106.6	-112.9	-119.5	-127.6
		40	-95.2	-106.4	-113.0	-119.7	-126.7	-135.3
		50	-99.6	-111.4	-118.3	-125.3	-132.6	-141.6
		60	-103.4	-115.6	-122.7	-130.1	-137.6	-146.9
	3	20	-108.1	-120.9	-128.4	-136.0	-143.9	-153.7
		25	-113.5	-126.9	-134.7	-142.8	-151.1	-161.3
		30	-117.8	-131.7	-139.8	-148.2	-156.8	-167.4
		40	-124.9	-139.7	-148.3	-157.2	-166.3	-177.5
		50	-130.7	-146.2	-155.2	-164.5	-174.0	-185.8
		60	-135.7	-151.8	-161.1	-170.7	-180.6	-192.9
Partially Enclosed	1	20	-72.9	-81.6	-86.6	-91.8	-97.1	-103.7
		25	-76.5	-85.6	-90.9	-96.3	-101.9	-108.8
		30	-79.4	-88.9	-94.3	-100.0	-105.8	-112.9
		40	-84.3	-94.3	-100.0	-106.0	-112.2	-119.8
		50	-88.2	-98.6	-104.7	-111.0	-117.4	-125.3
		60	-91.5	-102.4	-108.7	-115.2	-121.8	-130.1
	2	20	-92.9	-104.0	-110.4	-117.0	-123.7	-132.1
		25	-97.6	-109.1	-115.8	-122.8	-129.9	-138.7
		30	-101.3	-113.3	-120.2	-127.4	-134.8	-143.9
		40	-107.4	-120.1	-127.5	-135.1	-143.0	-152.6
		50	-112.4	-125.7	-133.5	-141.4	-149.6	-159.8
		60	-116.6	-130.5	-138.5	-146.8	-155.3	-165.8
	3	20	-118.7	-132.8	-140.9	-149.3	-158.0	-168.7
		25	-124.6	-139.4	-147.9	-156.8	-165.8	-177.1
		30	-129.3	-144.6	-153.5	-162.7	-172.1	-183.8
		40	-137.1	-153.4	-162.8	-172.5	-182.5	-194.9
		50	-143.5	-160.5	-170.4	-180.6	-191.0	-204.0
		60	-148.9	-166.6	-176.9	-187.4	-198.3	-211.7

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.

APPENDIX C

Gable/Hip Roofs in **Exposure D in Miami-Dade & Broward County** (Roof slopes between 2:12 and 12:12)								
Building Type	Zone	Mean Roof Height (ft)	Basic Wind Speed (mph)					
			Risk Cat I	Risk Cat I	Risk Cat II	Risk Cat II	Risk Cat III, IV	Risk Cat III,IV
			156	165	170	175	180	186
Enclosed/ Partially Open	1	20	-75.5	-84.5	-89.7	-95.0	-100.5	-107.3
		25	-78.4	-87.7	-93.1	-98.6	-104.3	-111.4
		30	-80.9	-90.5	-96.1	-101.8	-107.7	-115.0
		40	-85.0	-95.1	-101.0	-107.0	-113.2	-120.9
		50	-88.4	-98.9	-105.0	-111.2	-117.7	-125.7
		60	-91.2	-102.1	-108.4	-114.8	-121.5	-129.7
	2	20	-99.7	-111.6	-118.5	-125.5	-132.8	-141.8
		25	-103.5	-115.8	-122.9	-130.3	-137.8	-147.2
		30	-106.9	-119.5	-126.9	-134.5	-142.3	-151.9
		40	-112.3	-125.7	-133.4	-141.4	-149.6	-159.7
		50	-116.8	-130.6	-138.7	-147.0	-155.5	-166.0
		60	-120.5	-134.8	-143.1	-151.7	-160.5	-171.4
	3	20	-130.9	-146.5	-155.5	-164.7	-174.3	-186.1
		25	-135.9	-152.0	-161.3	-171.0	-180.9	-193.1
		30	-140.2	-156.9	-166.5	-176.5	-186.7	-199.4
		40	-147.4	-164.9	-175.1	-185.5	-196.3	-209.6
		50	-153.3	-171.5	-182.0	-192.9	-204.1	-217.9
		60	-158.2	-177.0	-187.9	-199.1	-210.6	-224.9
Partially Enclosed	1	20	-88.3	-98.8	-104.9	-111.1	-117.6	-125.5
		25	-91.7	-102.5	-108.8	-115.3	-122.0	-130.3
		30	-94.6	-105.8	-112.3	-119.1	-126.0	-134.5
		40	-99.5	-111.3	-118.1	-125.2	-132.4	-141.4
		50	-103.4	-115.7	-122.8	-130.1	-137.7	-147.0
		60	-106.7	-119.4	-126.7	-134.3	-142.1	-151.7
	2	20	-112.6	-125.9	-133.7	-141.6	-149.9	-160.0
		25	-116.8	-130.7	-138.7	-147.0	-155.5	-166.1
		30	-120.6	-134.9	-143.2	-151.7	-160.5	-171.4
		40	-126.8	-141.8	-150.5	-159.5	-168.8	-180.2
		50	-131.8	-147.4	-156.5	-165.8	-175.4	-187.3
		60	-136.0	-152.2	-161.5	-171.2	-181.1	-193.4
	3	20	-143.7	-160.8	-170.7	-180.9	-191.4	-204.3
		25	-149.2	-166.9	-177.1	-187.7	-198.6	-212.1
		30	-154.0	-172.2	-182.8	-193.8	-205.0	-218.9
		40	-161.9	-181.1	-192.2	-203.7	-215.5	-230.1
		50	-168.3	-188.2	-199.8	-211.8	-224.0	-239.2
		60	-173.7	-194.3	-206.3	-218.6	-231.2	-246.9

This evaluation report is provided for State of Florida product approval under Rule 61G20-3. The manufacturer shall notify CREEK Technical Services, LLC of any product changes or quality assurance changes throughout the duration for which this report is valid. This evaluation report does not express nor imply warranty, installation, recommended use, or other product attributes that are not specifically addressed herein.