

Evaluation Report

“Englert® HT”

Roof Underlayment

Manufacturer:

Englert, Inc.

1200 Amboy Avenue

Perth Amboy, NJ 08862

(732) 826-8614

for

Florida Product Approval

FL 47595.2

Florida Building Code 8th Edition (2023)

(Evaluated for Use in HVHZ)

Method: 1 - D

Category: Roofing

Sub - Category: Underlayment

Product: Englert HT

Product Type: SBS Self-Adhered Roof Underlayment

This item has been digitally signed and sealed by James L. Buckner, P.E., on this date below. Printed copies of this document are not considered signed and sealed, and the signature must be verified on any electronic copies.

Prepared by:

James L. Buckner, P.E., S.E.C.B.

Florida Professional Engineer # 31242

Florida Evaluation ANE ID: 1916

Project Manager: Diana Galloway


Report No. 25-757-HT-pg-hz-ER (New)

Date: 06/19/2025

Contents:

Evaluation Report

Pages 1 – 5

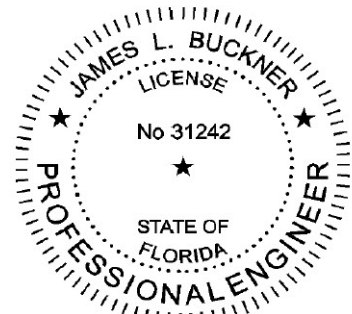

James L. Buckner, P.E.

FL31242

A handwritten signature in black ink, appearing to read "James L. Buckner".

Manufacturer:	Englert, Inc. 1200 Amboy Avenue Perth Amboy, NJ 08862 (732) 826-8614
Manufacturing Location:	Waco, TX http://www.englertinc.com/
Product Name:	“Englert HT”
Product Category:	Roofing
Product Sub-Category	Underlayment
Compliance Method:	State Product Approval Rule 61G20-3.005 (1) (d)
Product Description:	“Englert HT” is a self-adhering membrane composed of SBS modified bitumen and a UV resistant anti-slip polyethylene woven top facer designed for use as a roof underlayment in high temperature conditions. “Englert HT” may be used with metal roofing, asphalt shingles, slate, simulated slate, tile or wood shakes & shingles.
Product Material / Standards:	Material Type: Styrene Butadiene Styrene (SBS) Material shall comply with ASTM D 1970 per Florida Building Code (FBC), 8th Edition (2023), Chapter 15.
Product Dimension(s)	Roll Size: 36 in. x 67 ft. rolls Thickness: 40 mils minimum
Substrate(s):	“Englert HT” may be applied to the following substrates: (Design of substrate outside the scope of this evaluation.) Deck/Sheathing: • Plywood • Wood plank • Structural Concrete Base Sheet: • ASTM D226, Type II felt • ASTM D2626 • Elastobase V • Elastobase P • PolyAnchor HV
Installation:	Installation Instructions: (Refer to the end of this evaluation report.) Installation shall comply with FBC including Sections 1518.2 and applicable code sections of the current FBC, this report (subject to the Limitations and Conditions of Use listed in this Evaluation Report) and manufacturer’s installation instructions as a supplemental guide for attachment.

Quality Assurance:	The manufacturer has demonstrated compliance of roof panel products in accordance with the Florida Building Code and Rule 61G20-3.0005 (3) for manufacturing under a quality assurance program audited by an approved quality assurance entity through Keystone Certifications, Inc. (FBC Organization ID# QUA 1824).
Performance Standards:	The product described herein has been tested in accordance with: • ASTM D 1970-17a – <i>Specification Self-adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roof Underlayment for Ice Dam Protection</i>
Code Compliance:	The product(s) described herein have demonstrated compliance with the performance standards listed above as referenced in the Florida Building Code 8 th Edition (2023).
Evaluation Report Scope:	This product has been evaluated in compliance with the building envelope requirements of the Florida Building Code, as related to the scope section of Florida Product Approval Rule 61G20-3.001.
Product Limitations and Conditions of Use:	• Deck shall be in compliance with applicable building code. • Not to be used with clay or concrete roofing tiles. • Do not expose product to direct sunlight for more than 30 days. • All membranes or packaging shall bear the imprint or identifiable marking of the manufacturer's name or logo, city, state and the following statement: "Miami-Dade County Product Control Approved" or the Miami-Dade County Product Control Seal. • Product is acceptable for use with any roof covering system which specifically references product in the FBC approval. If not listed, an application may be submitted to the local building jurisdiction for approval based on this evaluation combined with supporting data for the roof covering and its attachment to support.
General Limitations and Conditions of Use:	• <u>Scope of "Limitations and Conditions of Use" for this evaluation:</u> This evaluation report for "Optional Statewide Approval" contains technical documentation, specifications and installation method(s) which include "Limitations and Conditions of Use" throughout the report in accordance with Rule 61G20-3.005. Per Rule 61G20-3.004, the Florida Building Commission is the authority to approve products under "Optional Statewide Approval". • <u>Option for application outside "Limitations and Conditions of Use"</u> Rule 61G20-3.005(1)(e) allows engineering analysis for "project specific approval by the local authorities having jurisdiction in accordance with the alternate methods and materials authorized in the Code". Any modification of the product as evaluated in this report and approved by the Florida Building Commission is outside the scope of this evaluation and will be the responsibility of others. • Fire Classification is outside the scope of Rule 61G20-3, and is therefore not included in this evaluation. • This evaluation report evaluates the use of this product for use in the High Velocity Hurricane Zone code section. (Dade & Broward Counties)

Referenced Data:

1. ASTM D 1970
FL5249.1-2 R46, 4/8/2025
By Robert Nieminen, P.E. (FBC Organization #ANE ID: 1983)
2. Verification of Data Authorization
PLAC, incl Exhibit A, B, C, 6/4/2025
3. Quality Assurance
By Keystone Certifications, Inc. (FBC Organization ID# QUA 1824)
Englert, Inc. Licensee #420
4. Certification of Independence
By James L. Buckner, P.E. @ CBUCK Engineering
(FBC Organization # ANE ID: 1916)

INSTALLATION METHOD

"Englert HT"

Self-Adhered Roofing Underlayment

Evaluated Installation Method (for use in HVHZ):

Installation shall be in accordance with installation method described herein and in compliance with Sections 1518.2.1 and applicable code sections of the current Florida Building Code, subject to the Limitations and Conditions of Use listed in this Evaluation Report, and in accordance with both the underlayment manufacturer's and roof covering manufacturer's installation instructions.

1. Englert HT adhered to mechanically fastened base sheet

Adhere one ply of Englert HT with 3" min. side laps and 6" min. end laps.
Over

One or more plies of ASTM D226 Type II, ASTM D2626 with a 4" min. side lap and 6" min. end lap attached to deck with approved nails and tin caps (FBC HVHZ 1517.5) or approved concrete fasteners and plates.

2. Englert HT adhered directly to the entire roof deck

Adhere Englert HT directly to the entire roof deck with a 3" min. side laps and 6" min. end laps.

General Installation Instructions:

- Prime surface as recommended by manufacturer.
- Align the membrane, by completely unrolling and pressing exposed membrane area into place.
- Once aligned, wind back one half of the length.
- Score the release film on the high side of the roll.
- Unroll the first half of the roll by peeling back the release film and simultaneously pushing out the membrane.
- Repeat this procedure with the remaining half of the length.
- Firmly roll installed membrane using uniform pressure with a 2-3" heavy steel or rubber roller to seams and overlap.
- Product to be applied directly to a clean dry surface.
- Dust, dirt, oil, grease, moisture, debris and other loose materials or contaminants must be removed prior to application.
- Check that all nails in deck are not protruding and re-fasten any loose decking panels.
- Product shall not be permanently exposed to sunlight.
- Do not store underlayment in areas where moisture is a problem.
- Protect membrane from damage during construction.
- Apply membrane only in fair weather when the air, surface and membrane are at temperatures of 40 degrees Fahrenheit and higher.
- "Englert HT" shall not be left exposed for more than 30 days after installation.
- "Englert HT" may be used with asphalt shingles, metal roofing, slate, simulated slate, tile or wood shakes & shingles.

Product shall be installed in accordance with the installation method described herein and in compliance with applicable code sections of the Florida Building Code 8th Edition (2023), subject to the Limitations and Conditions of Use listed in this Evaluation Report.

Refer to manufacturer's installation instructions as a supplemental guide for attachment.