


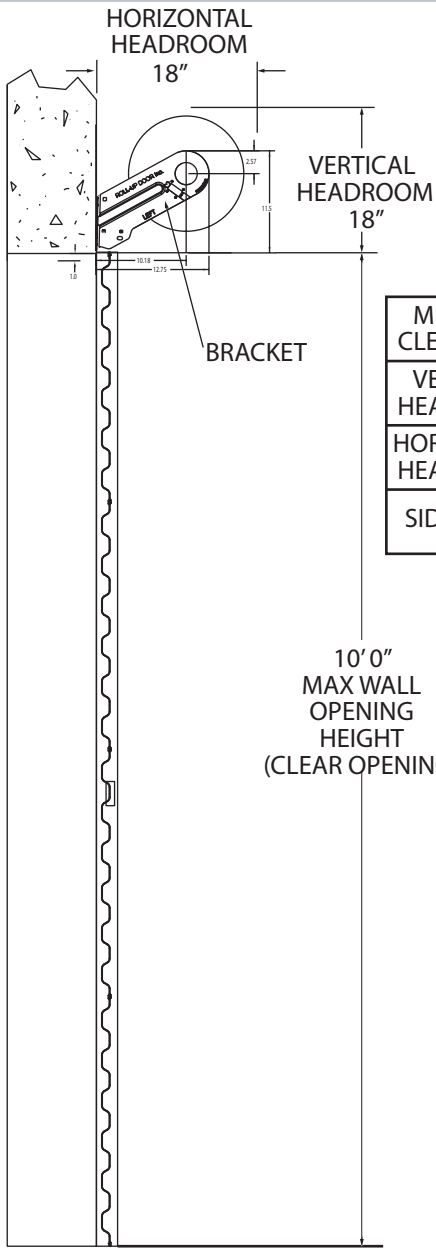



MINIMUM HEADROOM CLEARANCE DIMENSIONS	
VERTICAL HEADROOM	18"
HORIZONTAL HEADROOM	18"
SIDE ROOM	3 1/2"

10'0" MAX WALL OPENING HEIGHT (CLEAR OPENING)


JAMS (STEEL, WOOD OR CONCRETE)

WIND CLIP BAND


LATCH (OPPOSITE SIDE)

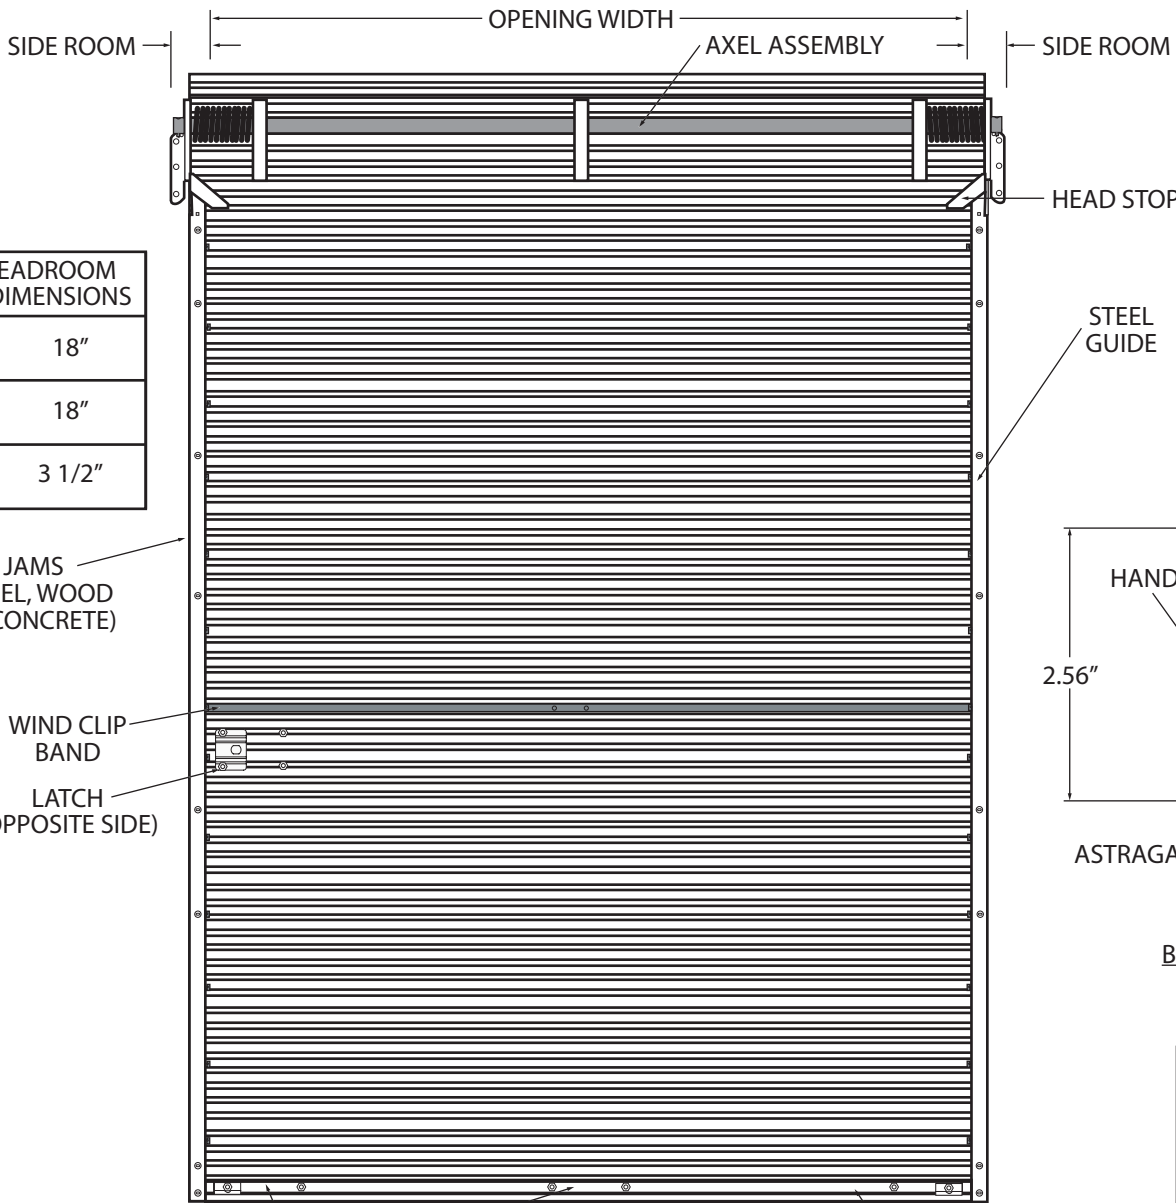


OUTSIDE DOOR VIEW
MINI LATCH




INSIDE DOOR VIEW
MINI LATCH
BACKER PLATE



BAKED POLYESTER WEATHERXL PAINT
TYPICAL PANEL (26 GA) DETAIL



MINI CATCH

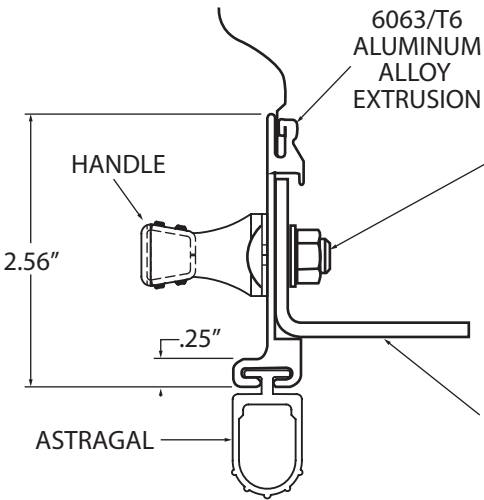


BOTTOM BAR ASSEMBLY
DETAIL

DOOR SCHEDULE	
DOOR WIDTH	DESIGN PRESSURE(PSF)
10'	+29.6 -32
9'	+34 -37.3

This item has been digitally signed and sealed by Bala Sockalingam, PE, on the date indicated.

Printed copies of this document are not considered signed and sealed and this signature must be verified on any electronic copies.

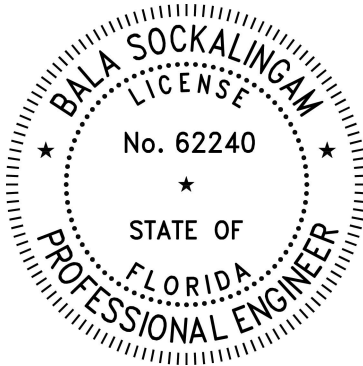

2026.09.28
17:09:48 -05'00'

SIDE VIEW

HANDLE (OPPOSITE SIDE)
WIND LOAD CERTIFIED UP TO 9' and 10' OPENING WIDTH
INSIDE ELEVATION
BOTTOM BAR ASSEMBLY

WIND CLIPS- Starting in 1st valley above bottom bar, wind clips are installed in valleys 1,4,7,10,16,19, and 22. Valley 13 receives metal banding with wind clip on each end resulting in minimum of 2 wind clips per sheet on each side and 1 band (door width x 1"x .115"x) with a clip on each end. With additional sheets, 2 more clips will be added per side continuing the same pattern. (SEE METAL WIND CLIP 1 DRAWING)

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16"$
ANGLES: $\pm 3^\circ$
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005

MATERIAL
26G Steel
FINISH
Coated

	NAME	DATE
DRAWN	KMN	10/03/24
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		




ROLL UP DOOR INC.
505 Main Street Blackshear, GA 31516
912-449-9352

TITLE:
RDI SERIES 1000-WL
MAX. 10'-0" WIDE x MAX 10'-0" HIGH


SIZE A	DWG. NO. WRD-1002	REV A
------------------	----------------------	-----------------

SHEET 1 OF 2


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROLL UP DOOR INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROLL UP DOOR INC. IS PROHIBITED.

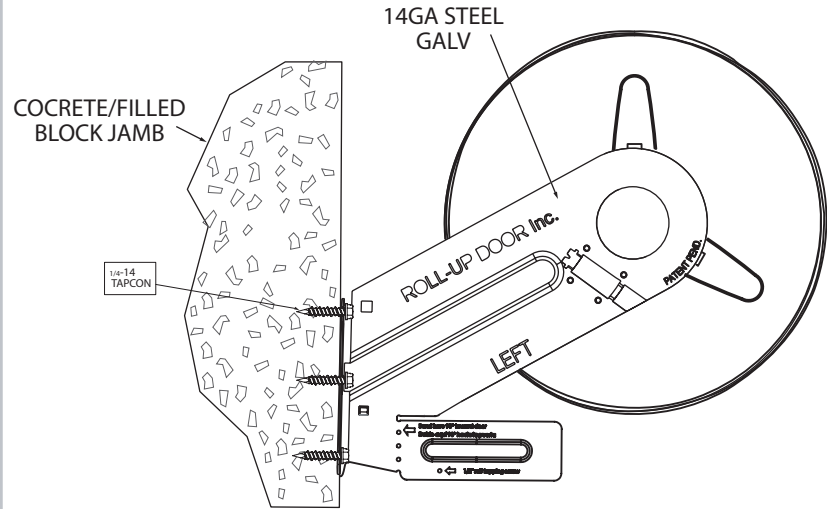


BRACKET MOUNTING TO MASONRY DETAIL

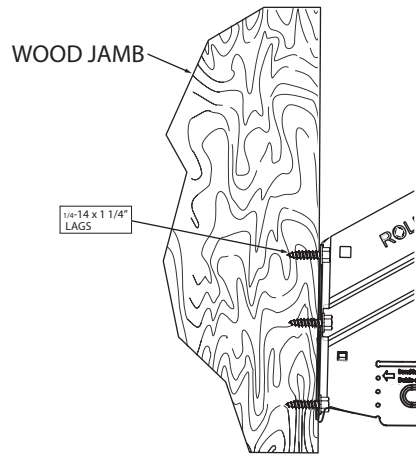


BRACKET MOUNTING TO WOOD DETAIL

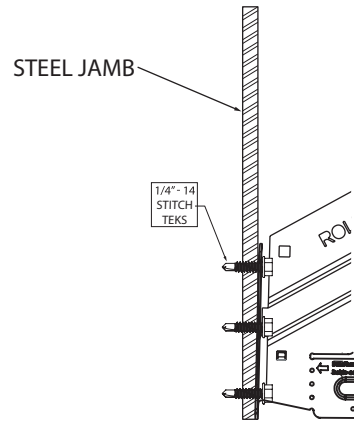


BRACKET MOUNTING TO STEEL DETAIL

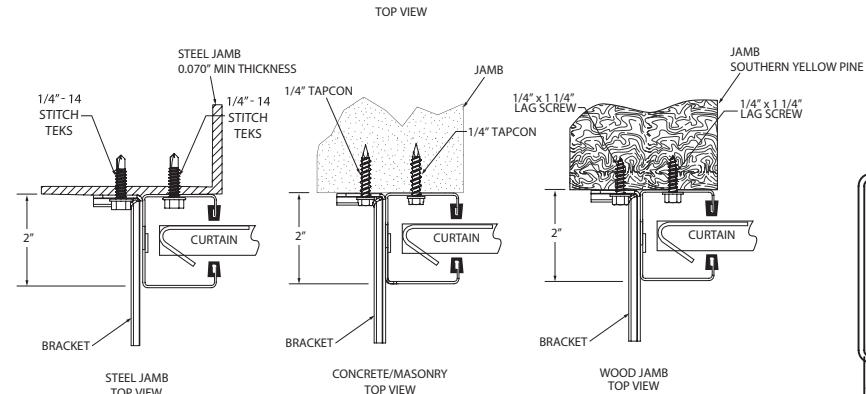


GUIDE MOUNT DETAIL




GUIDE DETAIL
18GA STEEL

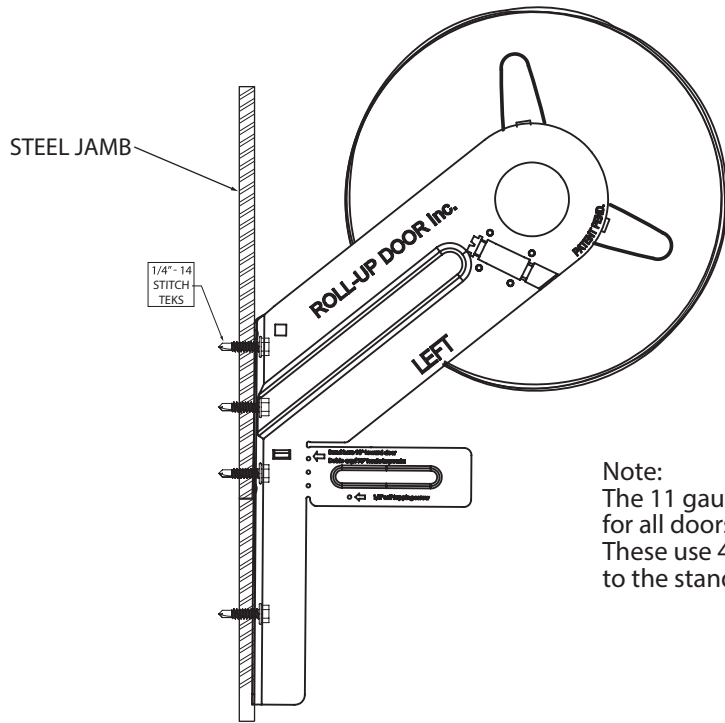


Note:
The 11 gauge extended bracket is used
for all doors 9' and over.
These use 4 fasteners as opposed
to the standard 14 gauge bracket using 3.

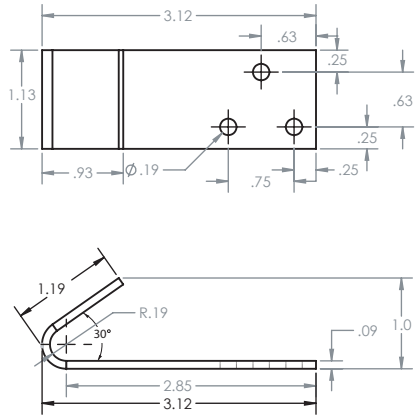

WINDCLIP



STEEL RIVET

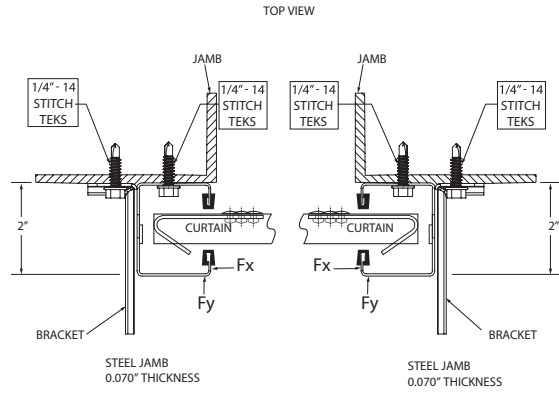

RIGHT AND LEFT GUIDE MOUNT DETAIL LOAD DIAGRAM
MIN 0.070\"/>

SUPERIMPOSED WIND CLIP FORCES		
DOOR WIDTH	FORCE (PLF)	
	Fx	Fy
10'0"	562.8	160
9'0"	478.1	167.9

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ROLL UP DOOR INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
ROLL UP DOOR INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16"$
ANGLES: $\pm 3^\circ$
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005

MATERIAL
26G Steel

FINISH
Coated

DRAWN

NAME

KMN

DATE

4/21/22

CHECKED

ENG APPR.

MFG APPR.

Q.A.

COMMENTS:



ROLL UP DOOR INC.

505 Main Street Blackshear, GA 31516
912-449-9352

TITLE:

RDI SERIES 1000-WL

MAX. 10'-0" WIDE x MAX 10'-0" HIGH

SIZE

A

DWG. NO.

WRD-1002

REV

A

SHEET 2 OF 2