


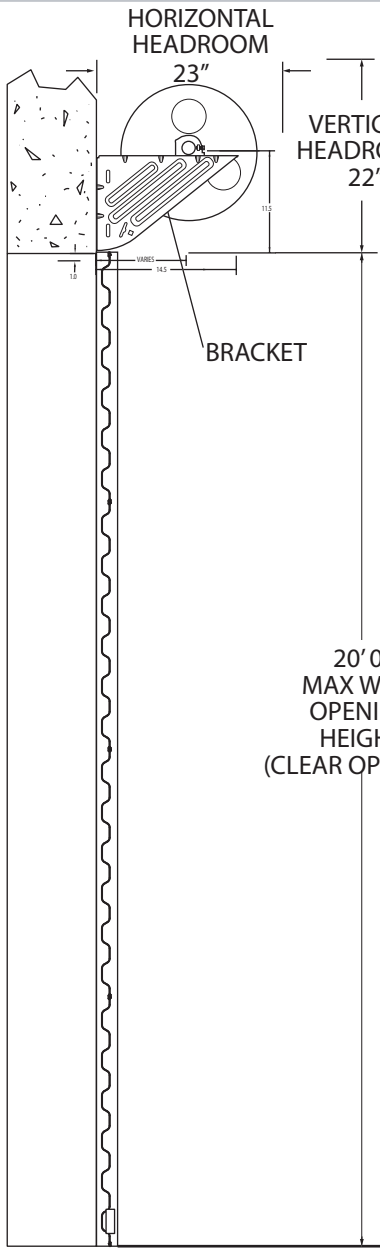


SIDE VIEW

MINIMUM HEADROOM CLEARANCE DIMENSIONS	
VERTICAL HEADROOM	22"
HORIZONTAL HEADROOM	23"
SIDE ROOM	10 1/2"

JAMS
(STEEL, WOOD
OR CONCRETE)

WIND CLIP

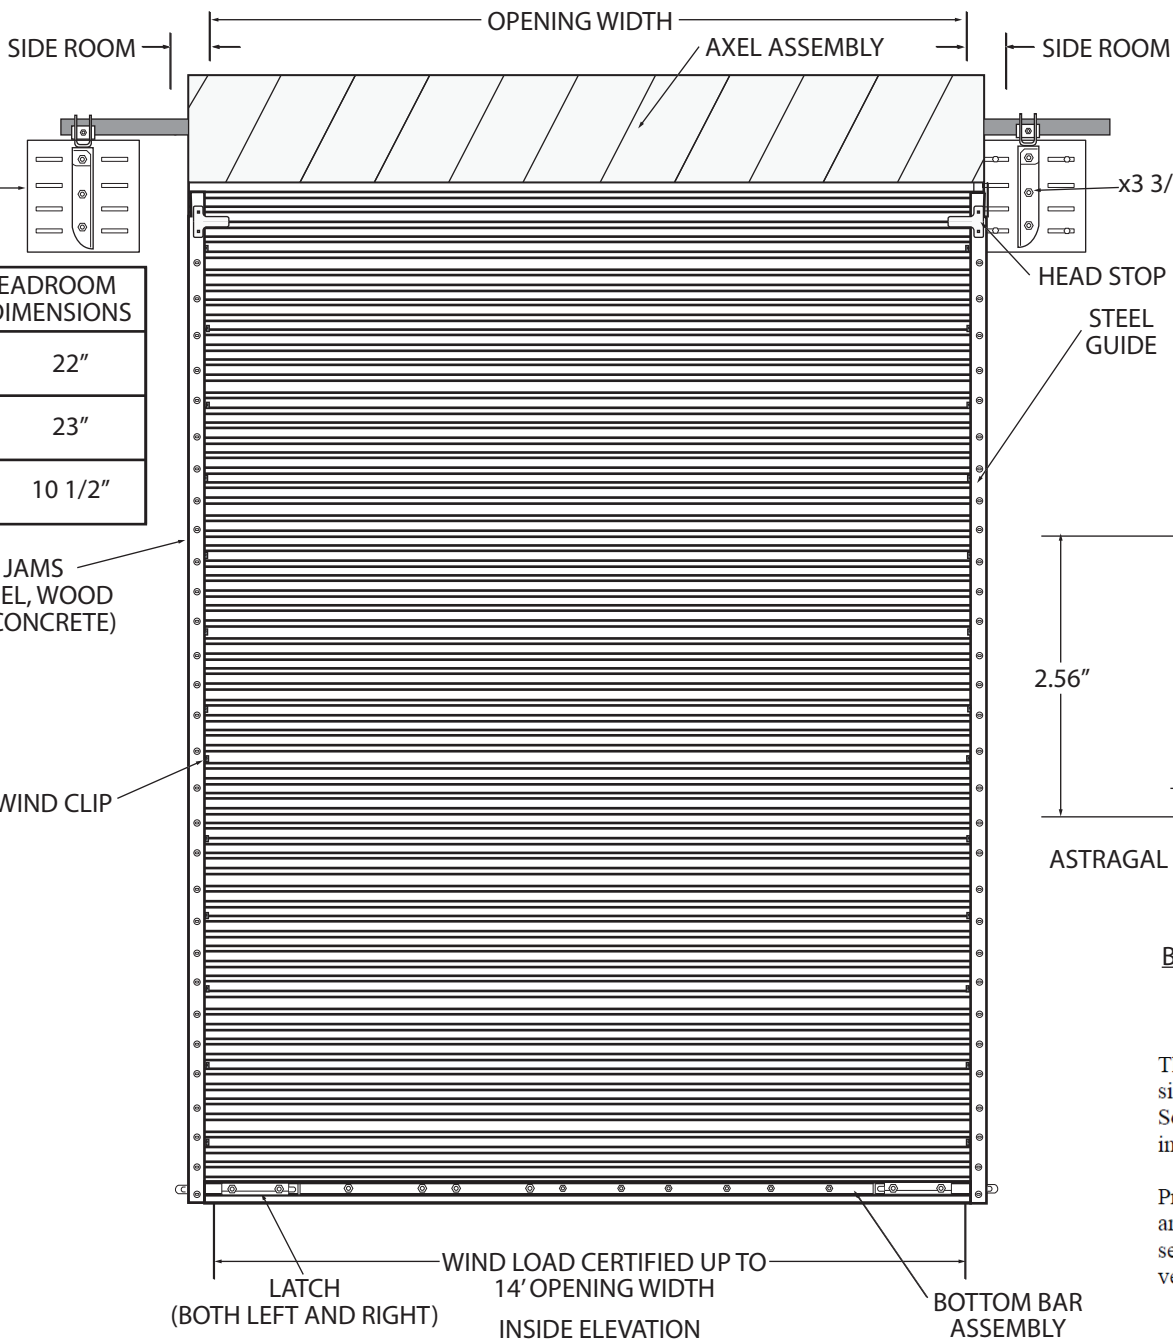

FOR HAND OPERATED
CHAIN HOIST OR
ELECTRIC OPERATION

x3 3/8" BOLTS (x2)

HEAD STOP

STEEL
GUIDE

2.56"


.25"

ASTRAGAL


BOTTOM BAR ASSEMBLY
DETAIL

This item has been digitally
signed and sealed by Bala
Sockalingam, PE, on the date
indicated.

Printed copies of this document
are not considered signed and
sealed and this signature must be
verified on any electronic copies.



BAKED POLYESTER
WEATHERXL PAINT
TYPICAL PANEL (26 GA) DETAIL

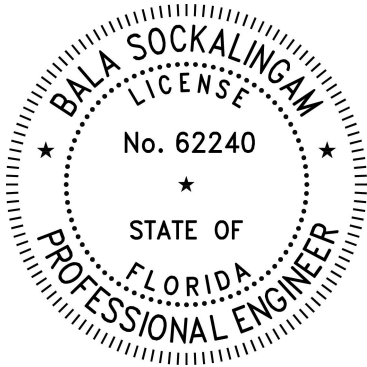

14' 0"	22.0
	-24.0
13' 0"	23.2
	-25.3
12' 0"	24.6
	-26.9
11' 0"	26.3
	-28.7
10' 0"	28.3
	-31.0
9' 0"	30.7
	-33.7
8' 0"	33.7
	-37.0

2026.09.25
15:05:01
-05'00'

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ROLL UP DOOR INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
ROLL UP DOOR INC. IS PROHIBITED.

WIND CLIPS- With 3 wind clip on each end of the
corrugated sheets resulting in minimum of 6 wind
clips per sheet.

(SEE METAL WIND CLIP 1 DRAWING)

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16"$
ANGLES: $\pm 3^\circ$
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005

MATERIAL
26G Steel

FINISH
Coated

	NAME	DATE
DRAWN	KMN	10/02/25
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		



ROLL UP DOOR INC.
505 Main Street Blackshear, GA 31516
912-449-9352


TITLE:
RDI SERIES 3000-WL
MAX. 12'-0" WIDE x MAX 14'-0" HIGH

SIZE
A


DWG. NO.
WRD-3003

REV
B


SHEET 1 OF 2

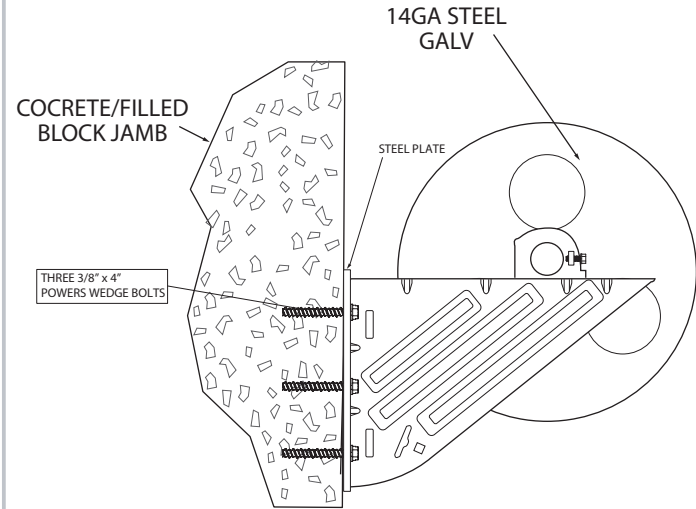


BRACKET MOUNTING TO MASONRY DETAIL

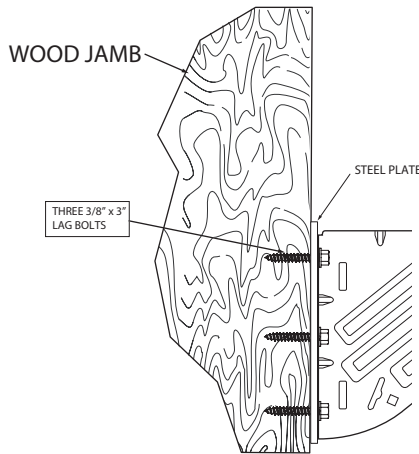


BRACKET MOUNTING TO WOOD DETAIL

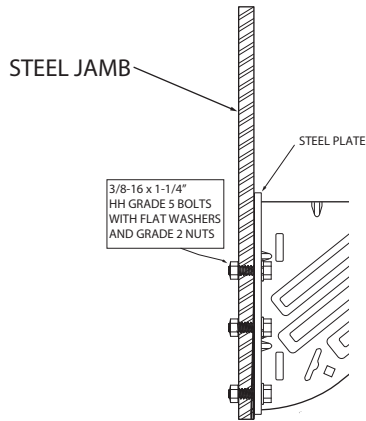


BRACKET MOUNTING TO STEEL DETAIL

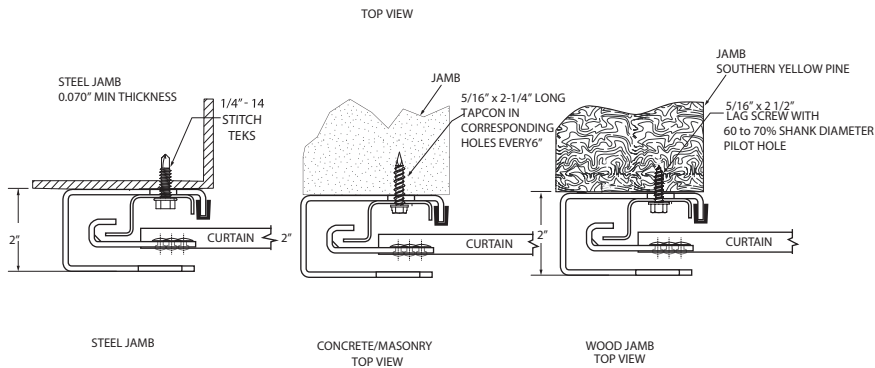



GUIDE MOUNT DETAIL

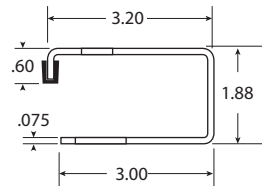


GUIDE DETAIL
14GA STEEL



WIND BAR DETAIL
14GA STEEL

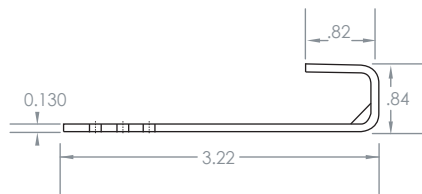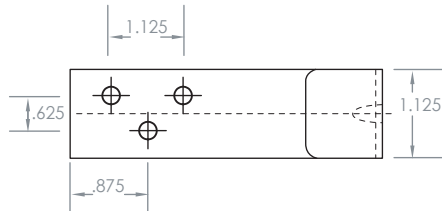


WINDCLIP



EACH WINDCLIP IS ATTACHED TO EACH CURTAIN WITH THREE STEEL RIVETS WITH .1875 BODY DIA.

DOOR GUIDE FORCE		
WIDTH	MAX REACTION (PLF)	
	+Fy	+Fx
14'-0"	168.0	1048.1
13'-0"	164.5	943.4
12'-0"	161.4	833.6
11'-0"	157.9	708.3
10'-0"	155.0	570.5
9'-0"	151.7	403.9
8'-0"	148.0	196.8

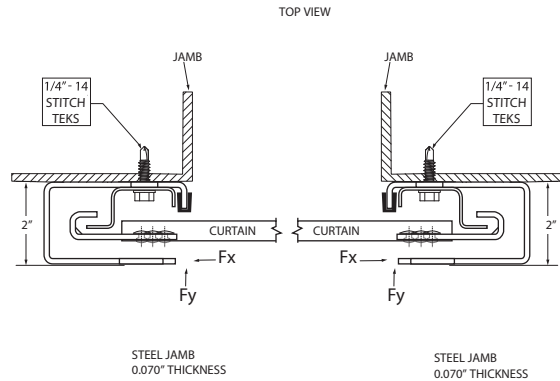

RIGHT AND LEFT GUIDE MOUNT DETAIL LOAD DIAGRAM
MIN 0.070" STEEL JAM SHOWN

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ROLL UP DOOR INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ROLL UP DOOR INC. IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL $\pm 1/16"$
ANGLES: $\pm 3^\circ$
TWO PLACE DECIMAL ± 0.01
THREE PLACE DECIMAL ± 0.005

MATERIAL
26G Steel

FINISH
Coated

DRAWN	NAME	DATE
CHECKED	KMN	10/02/25
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		



ROLL UP DOOR INC.
505 Main Street Blackshear, GA 31516
912-449-9352

TITLE: RDI SERIES 3000-WL
MAX. 12'-0" WIDE x MAX 14'-0" HIGH

SIZE A
DWG. NO. WRD-3003

REV B

SHEET 2 OF 2