
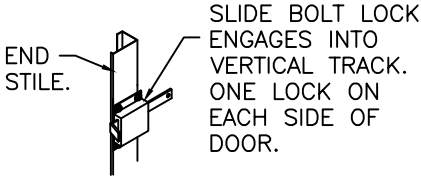



BRAND	EMBOSS TYPE		
	SHORT	LONG	FLUSH
CLOPAY	9130, HDP13	9133, HDPL13	9131, HDPF13
IDEAL	8130	8133	8131
HOLMES	7130	7133	7131

DOOR WIDTH	# OF INTERM. HINGES/JOINT
9'2" TO 9'10"	1
10'0" TO 13'10"	2
14'0" TO 15'10"	4
16'0"	3



DOOR HEIGHT	# OF SECTIONS	# OF U-BARS
UP TO 7'0"	4	6
7'3" TO 8'9"	5	8
9'0" TO 10'6"	6	9
10'9" TO 12'3"	7	11
12'6" TO 14'0"	8	12
14'3" TO 15'9"	9	14
16'0"	10	15
MAX SECTION HEIGHT: 21'		

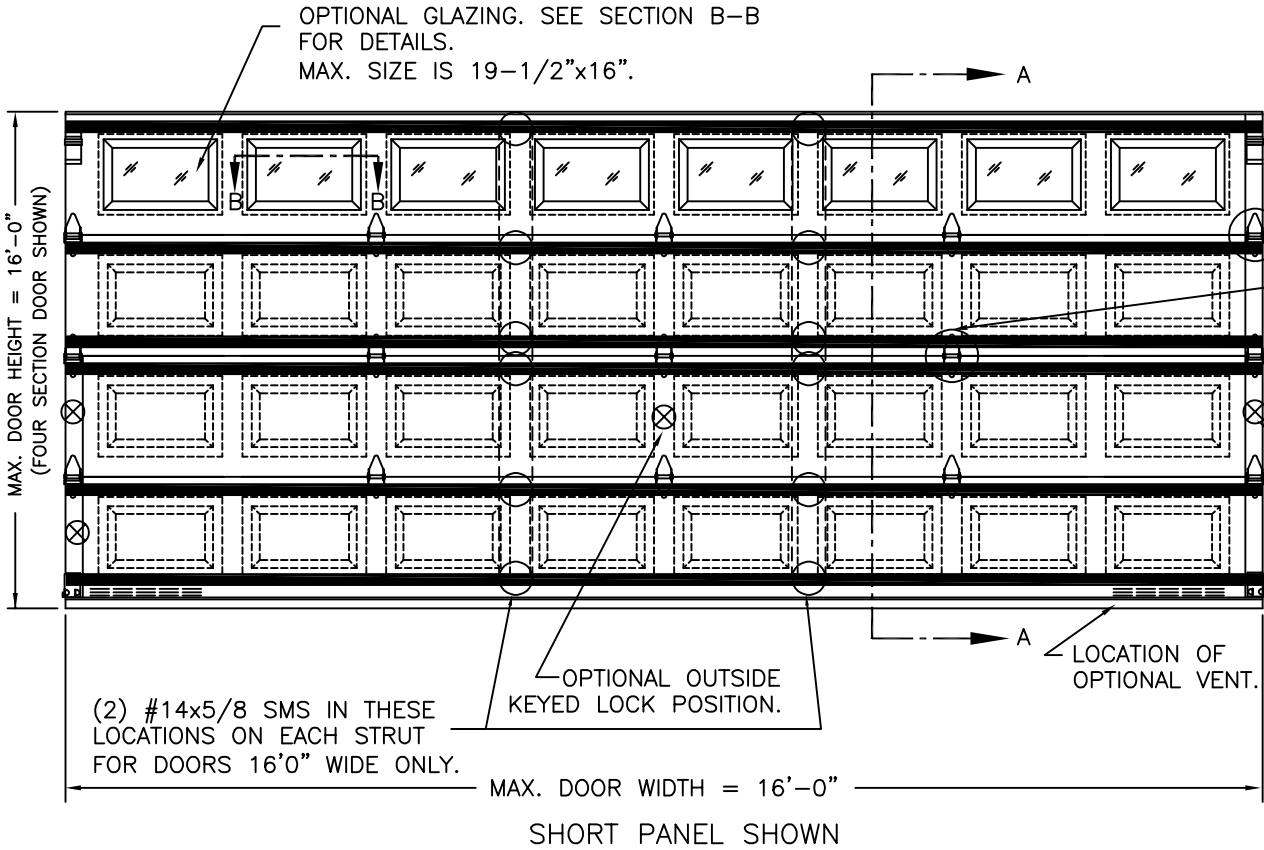

INSIDE SLIDE BOLT LOCK OPTION.

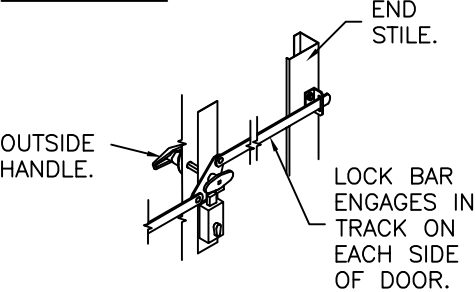

OUTSIDE KEYED LOCK WITH LOCK BAR LOCKING.

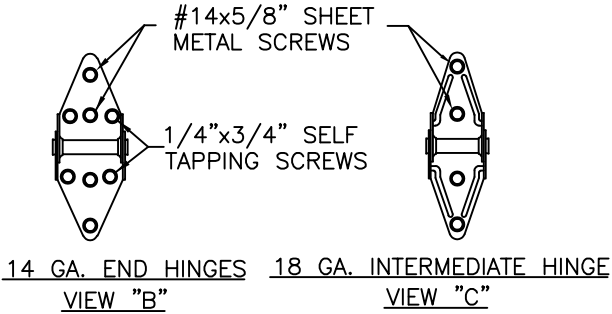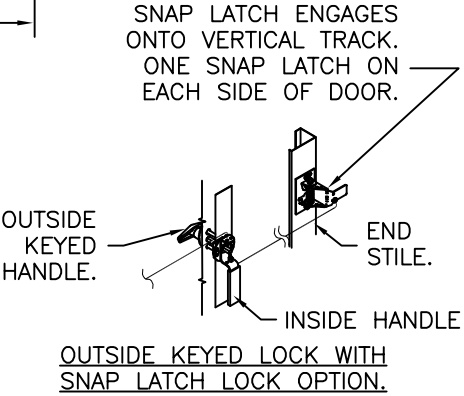

DESIGN LOADS: +24.0 P.S.F. & -26.5 P.S.F.
TEST LOADS: +36.0 P.S.F. & -39.8 P.S.F.

Unless Stated Otherwise TOLERANCES are
.0 = ±.031
.00 = ±.015
.000 = ±.005
.0000 = ±.001
Degrees = ±1/2°
Unless Stated Otherwise DIMENSIONS ARE IN INCHES.


Clopay
CORPORATION

8585 Duke Boulevard
Mason, OH 45040 USA
Tel. No. 513-770-4800
Fax No. 513-770-4853

DESCRIPTION: CLASSIC 1-3/8" INTELLICORE DC +24/-26.5 PSF			
DRAWN BY: SH	DATE: 7/14/14	SCALE: NTS	DWG. SIZE B
CHECKED BY: --	DATE: --	SHEET 1 OF 4	
DWG. NO.: 104704	VER: IBC		

MANUFACTURING PRODUCT CODE DSIU-1A171
PART NO.: N/A
WINDLOAD RATING W4 DP24

Digitally signed by Jim Wheeler
Date: 2025.12.15 15:09:20 -05'00'

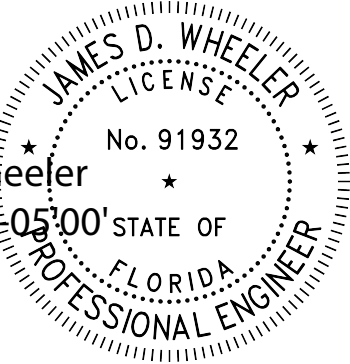


DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA PE #91932

BRAND	EMBOSS TYPE		
	SHORT	LONG	FLUSH
CLOPAY	9130, HDP13	9133, HDPL13	9131, HDPF13
IDEAL	8130	8133	8131
HOLMES	7130	7133	7131

SHEET: 2 OF 4		REVISIONS					
		REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
		02	—	—	—	SH	SEE REVISION HISTORY ON SHEET ONE.

STANDARD ASSEMBLY CONSTRUCTION:
OPTIONAL DSB OR 1/8" ACRYLIC LITES AVAILABLE. OPTIONAL ACRYLIC GLAZING IS PLASKOLITE OPTIX OR LUCITE CP APPROVED CC2 PLASTIC IN ACCORDANCE WITH IBC/FBC 2606.
THE ENTIRE DOOR ASSEMBLY INSTALLED IN COMPLIANCE WITH THIS SECTION MEETS THE WIND LOAD REQUIREMENTS OF THE FLORIDA BUILDING CODE OR INTERNATIONAL BUILDING CODE BUT DOES NOT MEET THE IMPACT RESISTANT REQUIREMENT FOR WINDBORNE DEBRIS REGIONS (REF. CHAPTER 16 FBC/IBC).

SECTION B-B

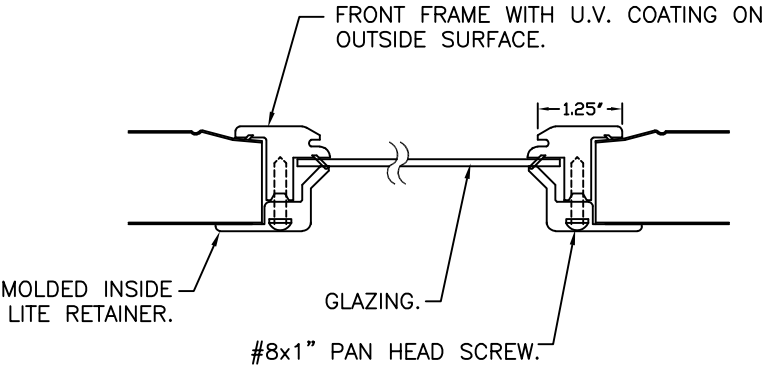

DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA PE #91932

DESIGN LOADS: +24.0 P.S.F. & -26.5 P.S.F.
TEST LOADS: +36.0 P.S.F. & -39.8 P.S.F.

Unless Stated Otherwise
TOLERANCES are
.0 = ±.031
.00 = ±.015
.000 = ±.005
.0000 = ±.001
Degrees = ±1/2'

Unless Stated Otherwise
DIMENSIONS ARE IN INCHES.

Clopay
CORPORATION

8585 Duke Boulevard
Mason, OH 45040 USA
Tel. No. 513-770-4800
Fax No. 513-770-4853

DESCRIPTION: CLASSIC 1-3/8" INTELLICORE DC +24/-26.5 PSF

DRAWN BY: SH

DATE: 7/14/14

CHECKED BY: --

DATE: --

DWG. NO.: 104704

MANUFACTURING PRODUCT CODE
DSIU-1A171

PART NO.: N/A

WINDLOAD RATING
W4 DP24

SCALE: NTS

SHEET 2 OF 4

VER: IBC

DWG. SIZE B

BRAND	EMBOSS TYPE		
	SHORT	LONG	FLUSH
CLOPAY	9130, HDP13	9133, HDPL13	9131, HDPF13
IDEAL	8130	8133	8131
HOLMES	7130	7133	7131

VERTICAL JAMB ATTACHMENT (WOOD FRAME BUILDINGS):
3/8"x3" LAG SCREWS ON 24" CENTERS. 1-1/8" O.D. WASHER REQUIRED. LAG SCREWS MAY BE COUNTERSUNK (BUT NOT REQUIRED) TO PROVIDE A FLUSH MOUNTING SURFACE. HORIZONTAL JAMBS DO NOT TRANSFER LOAD.


VERTICAL JAMB ATTACHMENT (C-90 BLOCK OR 2,000 PSI MIN. CONCRETE COLUMN):
3/8"x3" SLEEVE ANCHOR BOLTS ON 20" CENTERS (2,000 PSI MIN. CONCRETE). WASHERS INCLUDED WITH SLEEVE ANCHORS.
OR
1/4"x3" TAPCON SCREWS ON 17" CENTERS (2,000 PSI MIN. CONCRETE) OR 9" CENTERS (C-90 BLOCK). 1" O.D. WASHERS REQUIRED WITH TAPCONS.
ANCHORS MAY BE COUNTERSUNK (BUT NOT REQUIRED) TO PROVIDE A FLUSH MOUNTING SURFACE. HORIZONTAL JAMBS DO NOT TRANSFER LOAD.

OTHER JAMB CONFIGURATIONS: REFER TO DASMA TDS-161. A LICENSED DESIGN PROFESSIONAL MAY ALSO BE EMPLOYED TO APPROVE ALTERNATE FASTENERS AND/OR JAMB CONFIGURATIONS.

DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA PE #91932

SHEET:		REVISIONS					
3 OF 4		REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
		02	-	--	-	--	SEE REVISION HISTORY ON SHEET ONE.

27 GA. MIN. STEEL GALV. EXTERIOR SKIN WITH BAKED-ON PRIMER AND A BAKED-ON POLYESTER PAINTED TOP COAT.

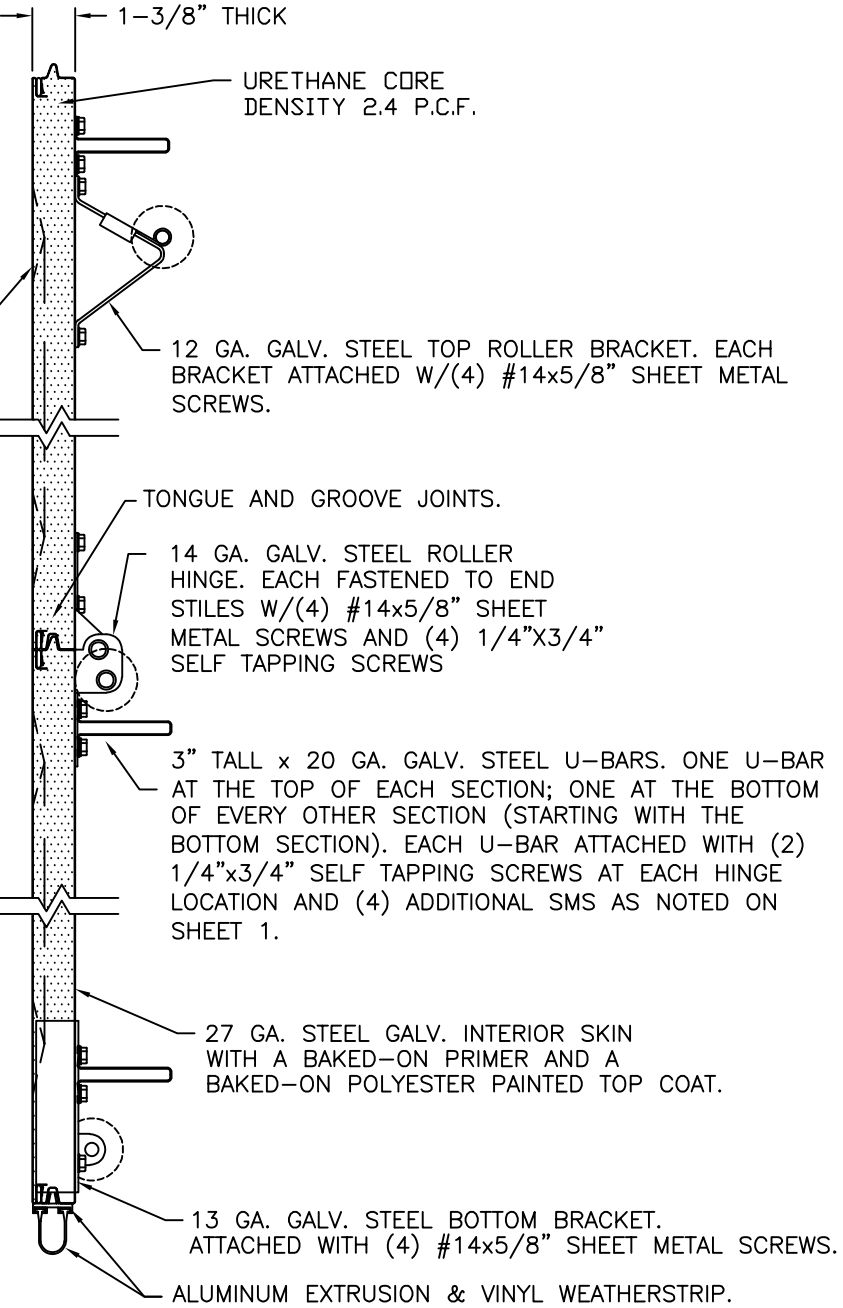




SECTION A-A (SIDE VIEW)

DESIGN LOADS: +24.0 P.S.F. & -26.5 P.S.F.
TEST LOADS: +36.0 P.S.F. & -39.8 P.S.F.

Unless Stated Otherwise TOLERANCES are .0 = ±.031 .00 = ±.015 .000 = ±.005 .0000 = ±.001 Degrees = ±1/2' Unless Stated Otherwise DIMENSIONS ARE IN INCHES.	MANUFACTURING PRODUCT CODE DSIU-1A171	
	PART NO.: N/A	
	WINDLOAD RATING W4 DP24	
	DESCRIPTION: CLASSIC 1-3/8" INTELLICORE DC +24/-26.5 PSF	
	DRAWN BY: SH	DATE: 7/14/14
CHECKED BY: --		DATE: --
DWG. NO.: 104704		SCALE: NTS
		SHEET 3 OF 4
		VER: IBC

BRAND	EMBOSS TYPE		
	SHORT	LONG	FLUSH
CLOPAY	9130, HDP13	9133, HDPL13	9131, HDPF13
IDEAL	8130	8133	8131
HOLMES	7130	7133	7131

SHEET: 4 OF 4	REVISIONS					
	REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
	02	—	--	—	—	SEE REVISION HISTORY ON SHEET ONE.

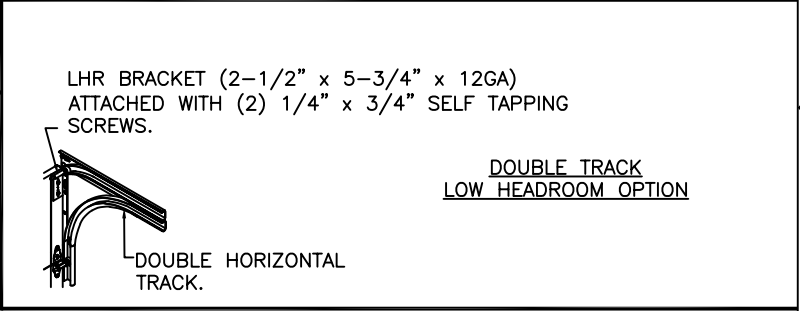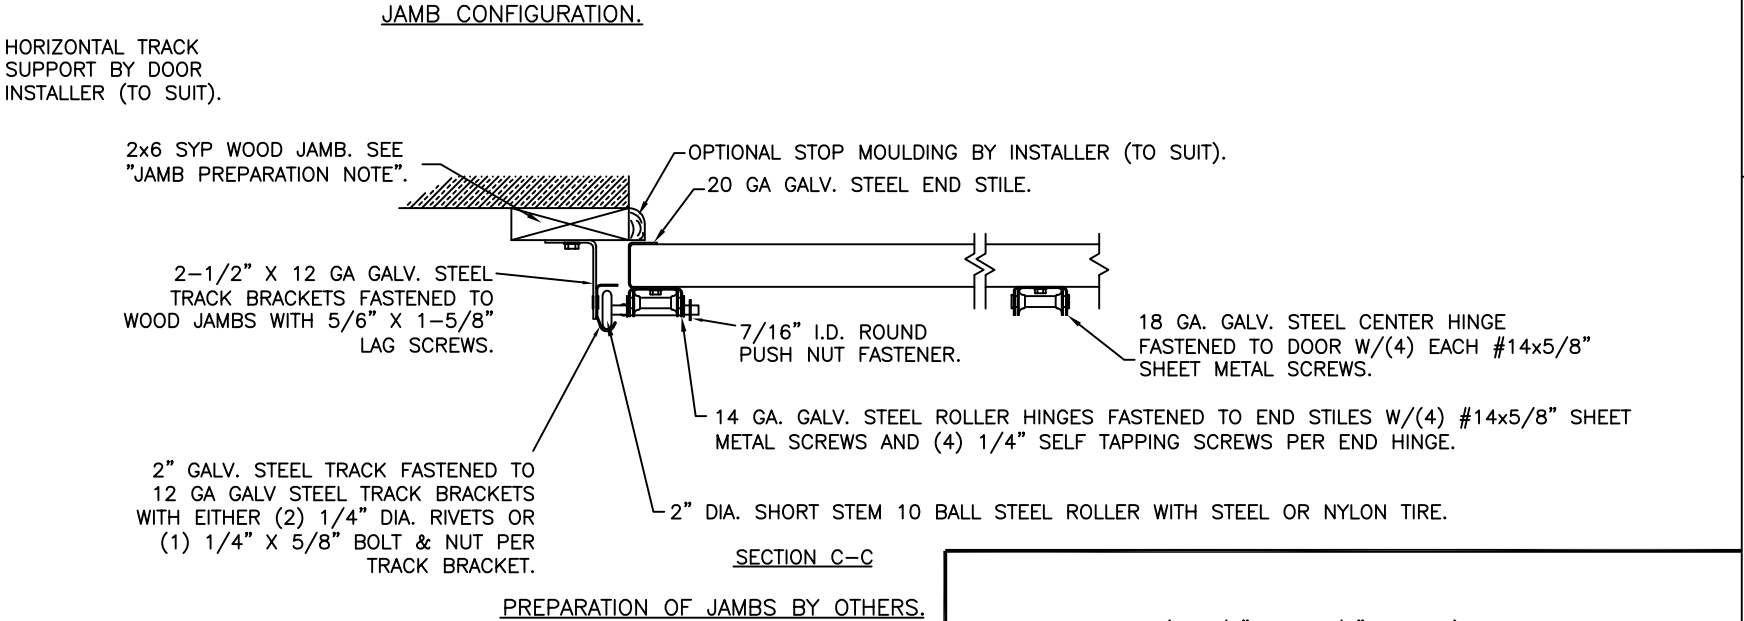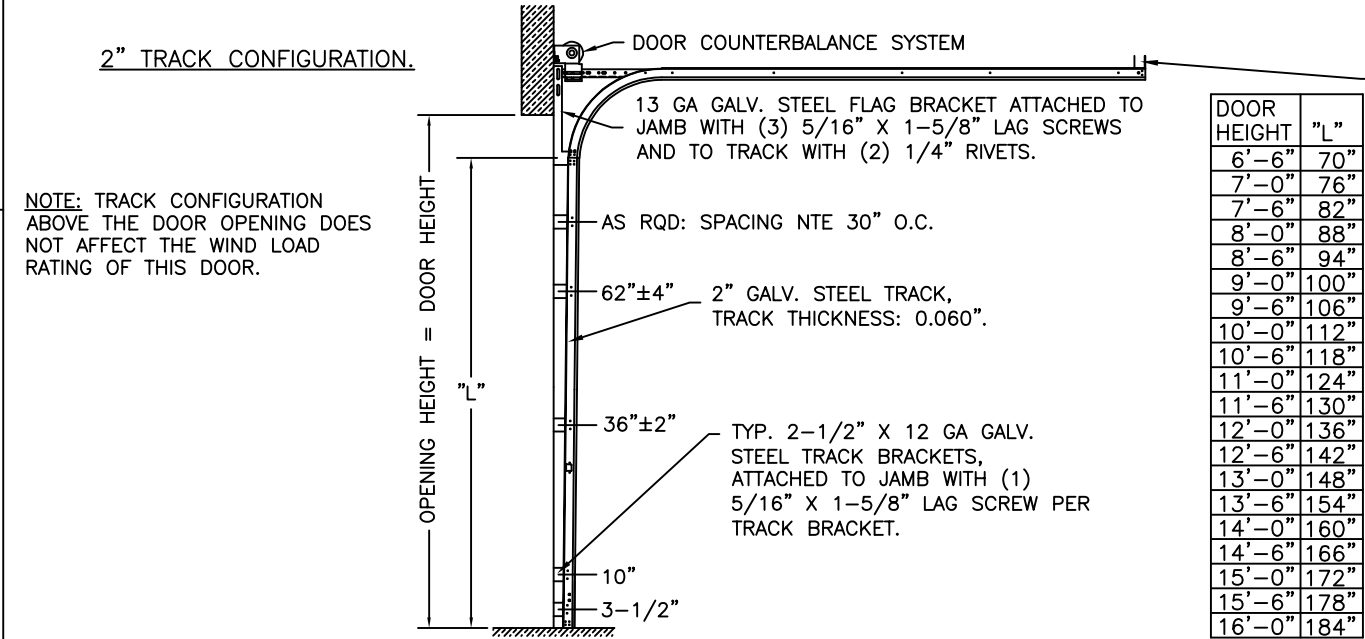

3" TRACK IS ALSO AVAILABLE.

DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA PE #91932

DESIGN LOADS: +24.0 P.S.F. & -26.5 P.S.F. TEST LOADS: +36.0 P.S.F. & -39.8 P.S.F.		MANUFACTURING PRODUCT CODE DSIU-1A171	
Unless Stated Otherwise TOLERANCES are .0 = ±.031 .00 = ±.015 .000 = ±.005 .0000 = ±.001 Degrees = ±1/2'		PART NO.: N/A	
Unless Stated Otherwise DIMENSIONS ARE IN INCHES.		WINDLOAD RATING W4 DP24	
8585 Duke Boulevard Mason, OH 45040 USA Tel. No. 513-770-4800 Fax No. 513-770-4853		DESCRIPTION: CLASSIC 1-3/8" INTELLICORE DC +24/-26.5 PSF	
DRAWN BY: SH		DATE: 7/14/14	SCALE: NTS
CHECKED BY: --		DATE: --	DWG. SIZE B
DWG. NO.: 104704		SHEET 4 OF 4	
		VER: IBC	