


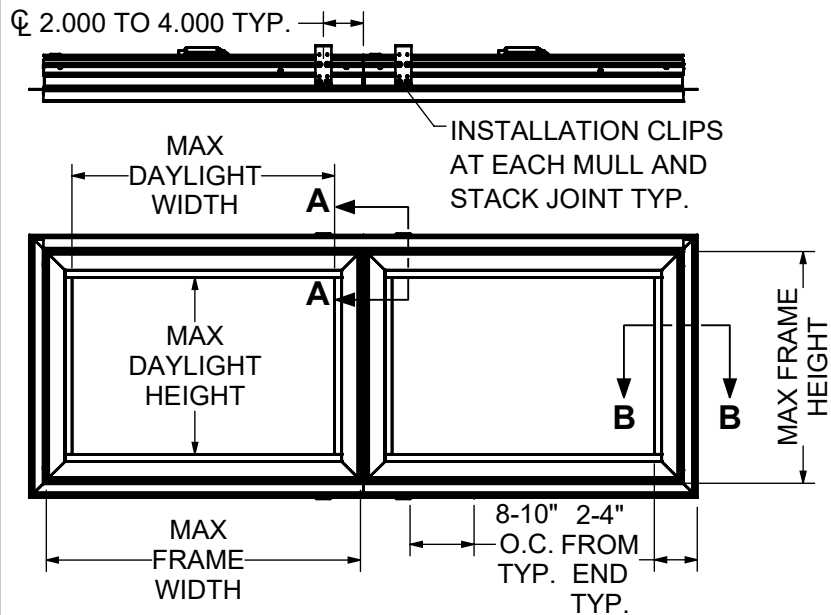

Product ID	Description	Conf.	Frame Size		Daylight Opening		Design Pressure (psf)	Frame Material
			Width (IN)	Height (IN)	Width (IN)	Height (IN)		
AAW02	AWNING	2-wide	60	36	54.59	30.59	+/-50	Aluminum

GENERAL NOTE(S):

1. INSTALLATION QUALIFIES SINGLE AND MULLED CONFIGURATIONS.
2. THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.
3. THE PRODUCT HAS BEEN EVALUATED TO THE FOLLOWING.
 - * AAMA/WDMA/CSA 101/I.S.2/A440-11
 - * AAMA/WDMA/CSA 101/I.S.2/A440-17
4. THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.
5. FASTENERS, ANCHORS, AND CONNECTORS SHALL COMPLY WITH THE CORROSION RESISTANCE REQUIREMENTS OF THE 2026 FLORIDA BUILDING CODE, SECTION 1711, BASED ON EXPOSURE CONDITIONS AND PROXIMITY TO A SALTWATER SHORELINE AND NOT ALL THE ONES SHOWN HERE NECESSARILY APPLY.

PELLA CORPORATION

102 MAIN STREET, PELLA, IOWA 50219

DRAWN: CLASS

ENGR.: FILE NAME:

RL AAW02

DATE CREATED: ECO:

1/28/26

TOLERANCES UNLESS OTHERWISE NOTED
 .X = ± X.X
 .XX = ± X.XX
 .XXX = ± X.XXX
 ANGLES = ± X.X°
 UNITS ARE IN INCHES

TITLE: AAW02, AW-AW MULLING INSTALLATION INSTRUCTIONS

PAGE

1 OF 1

DRAWING NUMBER

45-45225

REV


0

#6 X (1 -5/8") NON-CORROSIVE SCREW 1-1/2" PENETRATION INTO FRAMING MEMBER 8-10" ON CENTER THRU NAILING FIN AROUND THE UNIT'S ENTIRE PERIMETER TYP.

USE SILICONE SEALANT AROUND ENTIRE PERIMETER BETWEEN NAILING FIN & WOOD BUCK BY OTHERS TYP.


3/4" MIN EDGE DISTANCE TYP.

HEAD/SILL ANCHORAGE

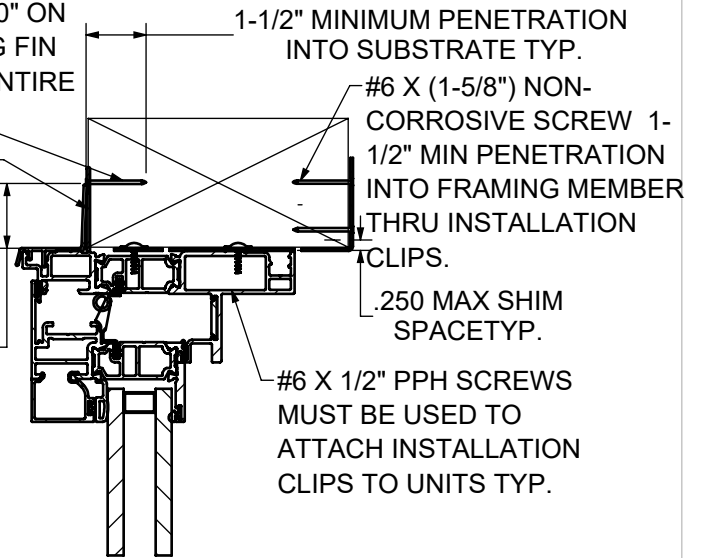

SECTION A-A
SCALE 1 : 3

SIDE ANCHORAGE

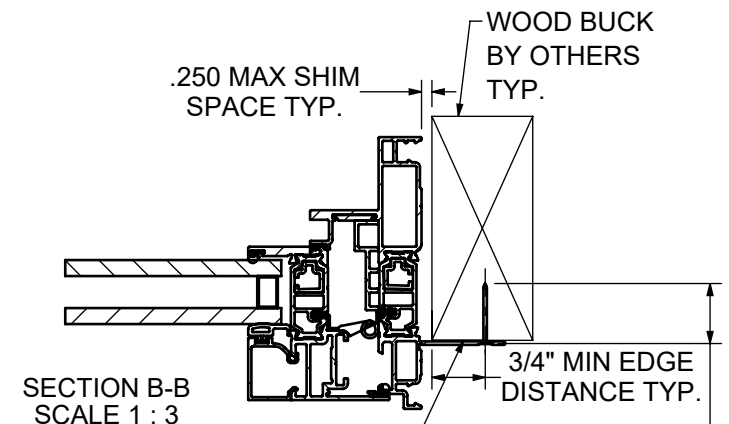

SECTION B-B
SCALE 1 : 3

USE SILICONE SEALANT AROUND ENTIRE PERIMETER BETWEEN NAILING FIN & WOOD BUCK BY OTHERS TYP.