
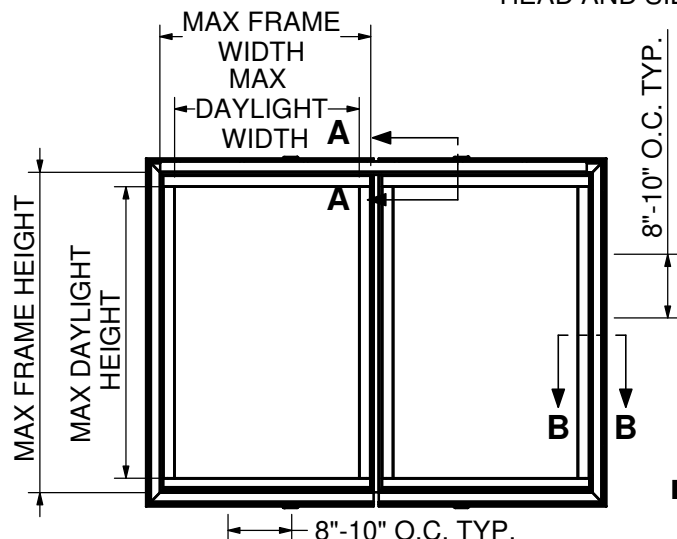


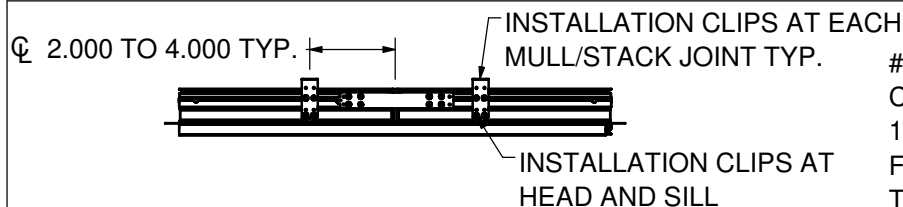


AGF05 DS-DS STEEL REINFORCED MULL NAILING FIN INSTALLATION

#6 X (1-5/8") NON-CORROSIVE SCREW(S) 1-1/2" MIN PENETRATION INTO FRAMING 8-10" ON CENTER THRU NAILING FIN AROUND THE UNITS ENTIRE PERIMETER TYP.

USE SILICONE SEALANT AROUND ENTIRE PERIMETER BETWEEN NAILING FIN & WOOD BUCK BY OTHERS TYP.


3/4" MIN EDGE DISTANCE TYP.

HEAD/SILL ANCHORAGE

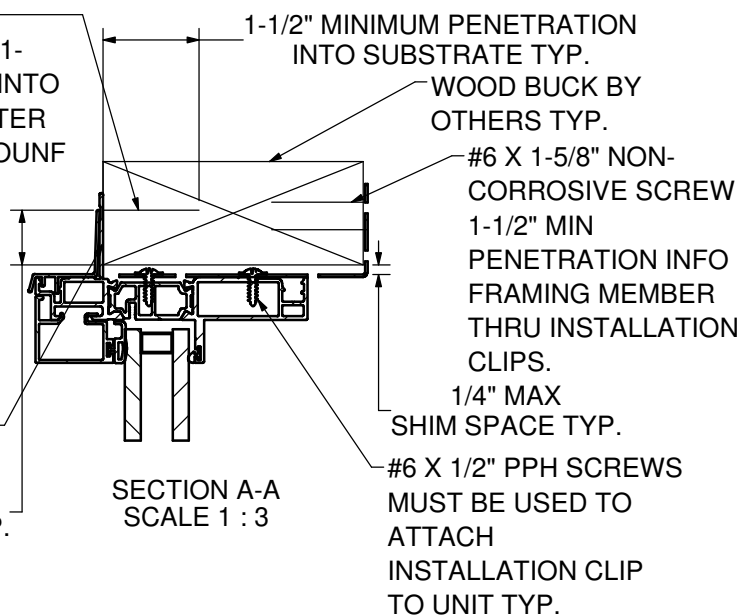

1/4" MAX SHIM SPACE TYP.

SECTION B-B
SCALE 1 : 3

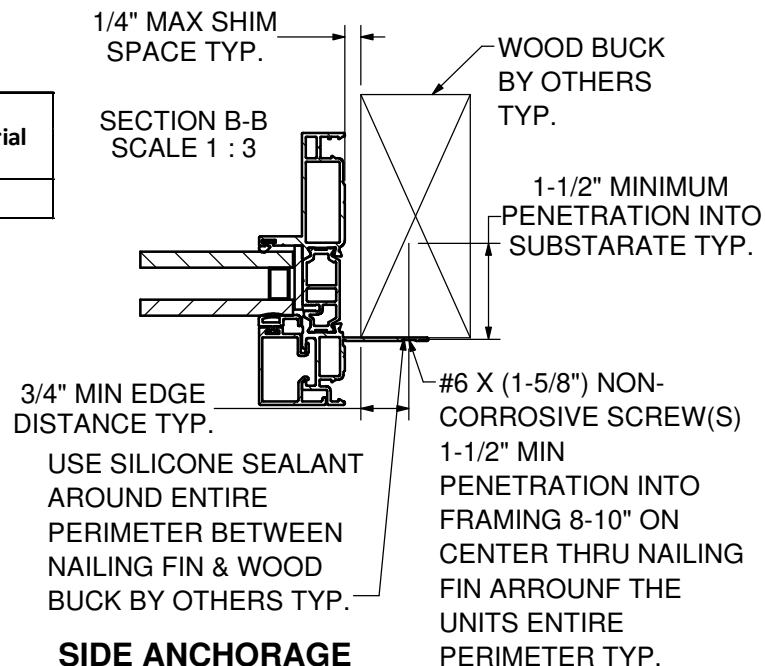

Product I.D.	Description	Conf.	Frame Size		Daylight Size		DP Rating (psf)	Frame Material
			Width	Height	Width	Height		
AGF05	Direct Set	2-wide	93.625	141.625	90.947	138.947	+/-25	Aluminum

GENERAL NOTE(S):

1. INSTALLATION QUALIFIES SINGLE AND MULLED CONFIGURATIONS.
2. THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.
3. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), EXCLUDING HVHZ. THE PRODUCT HAS BEEN EVALUATED TO THE FOLLOWING.
 - * AAMA/WDMA/CSA 101/I.S.2/A440-11
 - * AAMA/WDMA/CSA 101/I.S.2/A440-17
4. THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE WINDOW(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

PELLA CORPORATION
102 MAIN STREET, PELLA, IOWA 50219

DRAWN:

ENGR.: RL

DATE CREATED:
2/3/2026

CLASS

FILE NAME: AGF05

ECO:

TOLERANCES UNLESS OTHERWISE NOTED
.X = ± X.X
.XX = ± X.XX
.XXX = ± X.XXX
ANGLES = ± X.X°
UNITS ARE IN INCHES

TITLE:

DS-DS AL REINFORCEMENT MULL FBC INSTALLATION

PAGE

1 OF 1

DRAWING NUMBER

45-45236

REV