

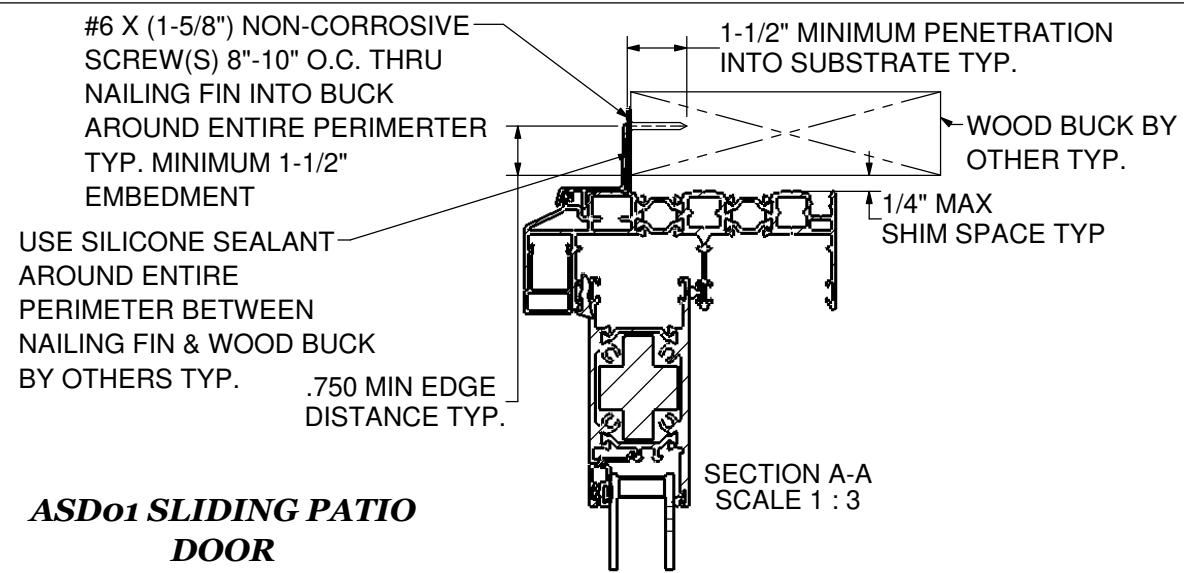


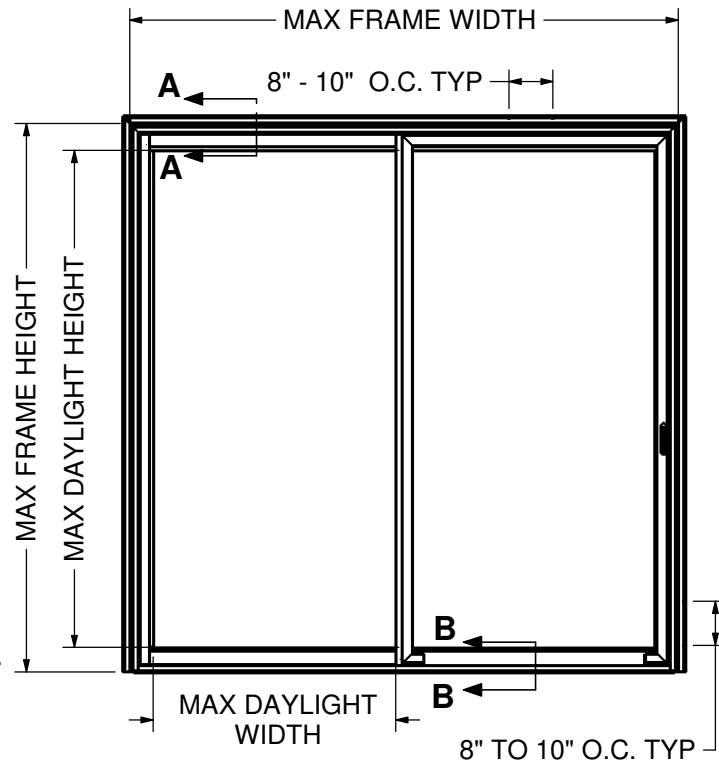

**ASD01 SLIDING PATIO
DOOR
HP INTERLOCK
NAILING FIN
INSTALLATION**

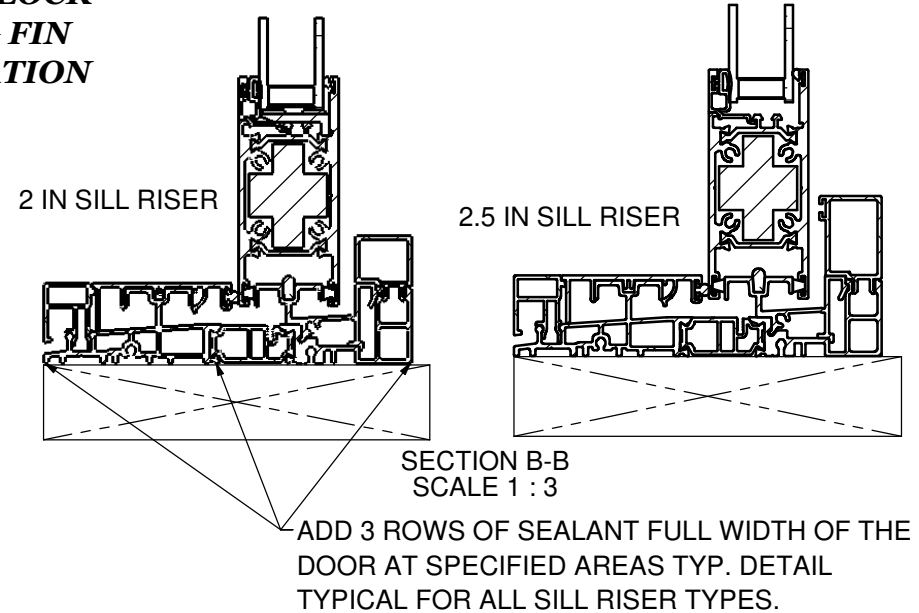

GENERAL NOTE(S):


1. THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.
2. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), EXCLUDING HVHZ. THE PRODUCT HAS BEEN EVALUATED TO THE FOLLOWING.
 * AAMA/WDMA/CSA 101/I.S.2/A440-17
 * AAMA/WDMA/CSA 101/I.S.2/A440-22
3. THIS SCHEDULE ADDRESSES ONLY THE FASTENERS REQUIRED TO ANCHOR THE DOOR(S) TO ACHIEVE THE RATED DESIGN PRESSURE. THOROUGHLY READ AND FOLLOW MANUFACTURERS INSTALLATION INSTRUCTIONS RECEIVED WITH UNIT. THIS GUIDE DOES NOT ADDRESS THE SEALING CONSIDERATIONS THAT MAY ARISE IN DIFFERENT WALL CONDITIONS.

PELLA CORPORATION
102 MAIN STREET, PELLA, IOWA 50219


DRAWN:	CLASS
ENGR.: RL	FILE NAME: ASD01
DATE CREATED: 2/4/2026	ECO:

TOLERANCES UNLESS OTHERWISE NOTED
 .X = ± X.X
 .XX = ± X.XX
 .XXX = ± X.XXX
 ANGLES = ± X.X°
 UNITS ARE IN INCHES

TITLE: ASD01 - SPD 2-WIDE FBC INSTALLATION INSTRUCTIONS, HP INTERLOCK		
PAGE	DRAWING NUMBER	REV
1 OF 2	45-45249	

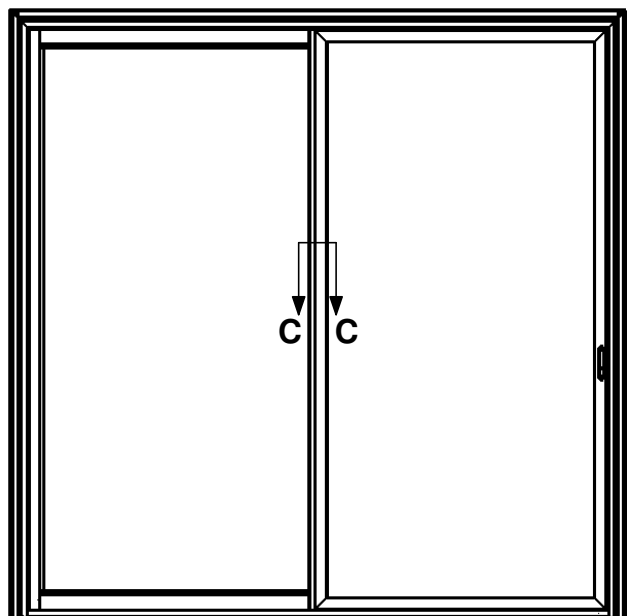

HP INTERLOCKER

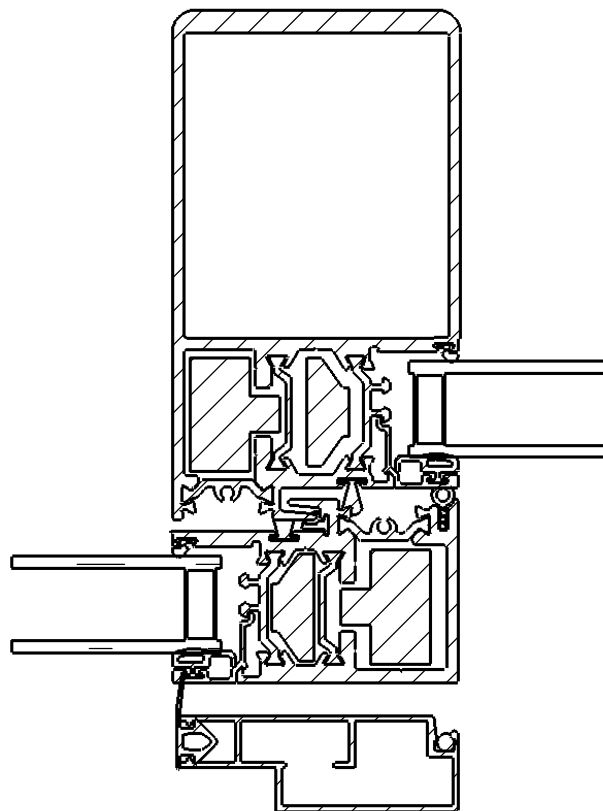

SECTION C-C
SCALE 1 : 2

DESCRIPTION	MAX FRAME SIZE		MAX DAYLIGHT OPENING		DESIGN PRESSURE (PSI)	FRAME MATERIAL
	WIDTH (IN)	HEIGHT (IN)	WIDTH (IN)	HEIGHT (IN)		
ASD01, 2-WIDE HP INTERLOCK, 2.5" RISER	143.25	143.5	65.851	134.101	+25/-25	ALUMINUM
ASD01, 2-WIDE HP INTERLOCK, 2" RISER, LIMITED WATER-DP20	143.25	143.5	65.851	134.101	+25/-25	ALUMINUM

PELLA CORPORATION
102 MAIN STREET, PELLA, IOWA 50219

DRAWN:

ENGR.:

DATE CREATED:

2/4/2024

RL

CLASS

FILE NAME:

ECO:

ASD01

TOLERANCES UNLESS
OTHERWISE NOTED
.X = ± X.X
.XX = ± X.XX
.XXX = ± X.XXX
ANGLES = ± X.X°
UNITS ARE IN INCHES

TITLE:

ASD01 - SPD 2-WIDE FBC INSTALLATION INSTRUCTIONS,
HP INTERLOCK

PAGE

2 OF 2

DRAWING NUMBER

45-45249

REV