



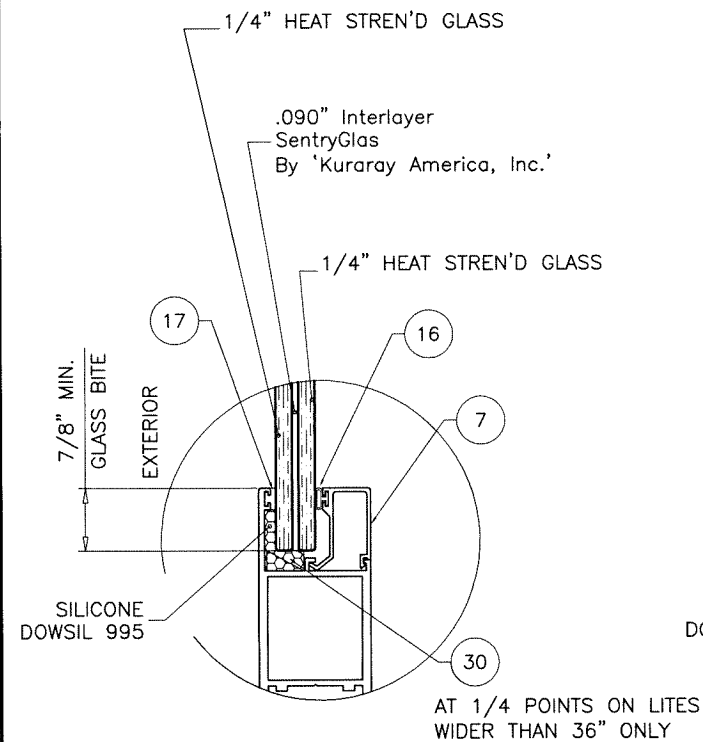


**GLASS TYPE 'A'**

9/16" OVERALL LAMINATED GLASS

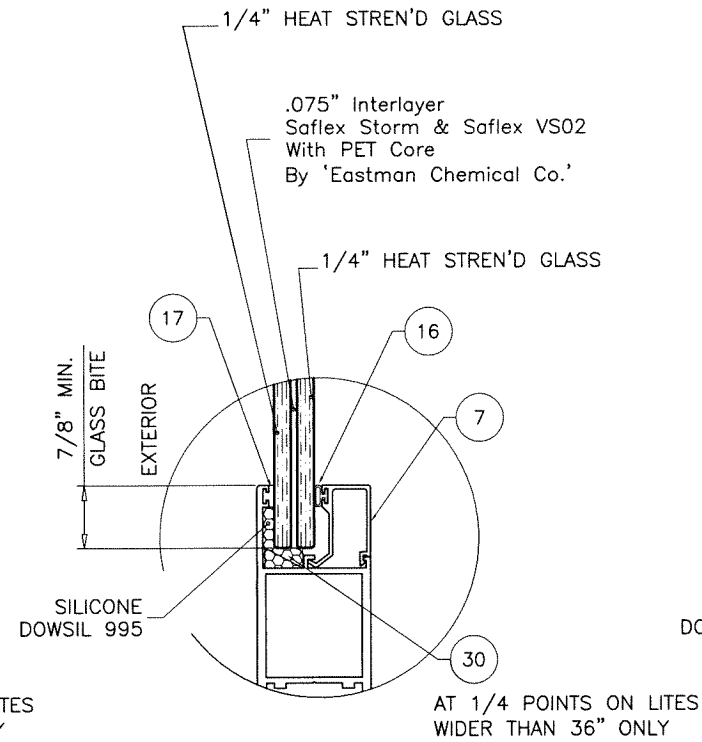


**GLASS TYPE 'B'**

9/16" OVERALL LAMINATED GLASS

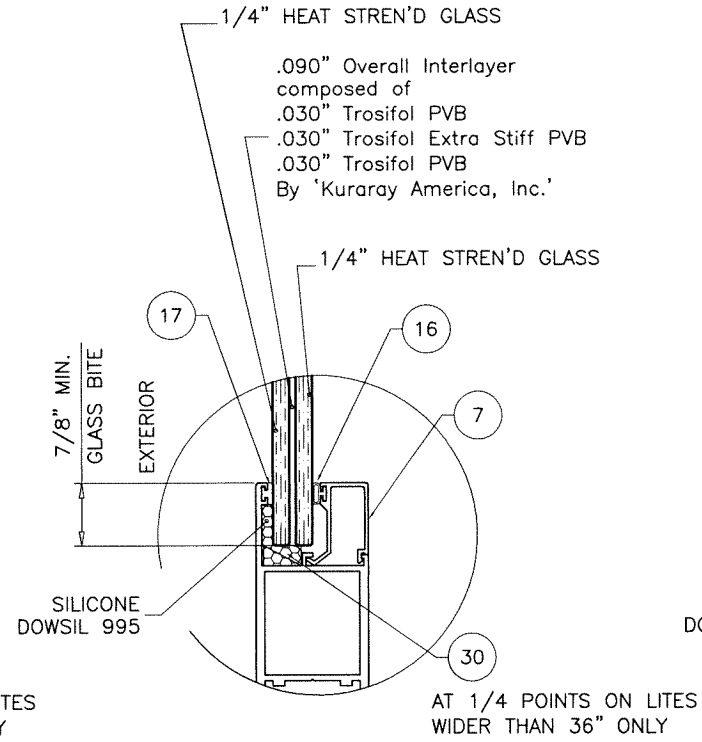

**GLASS TYPE 'C'**

9/16" OVERALL LAMINATED GLASS

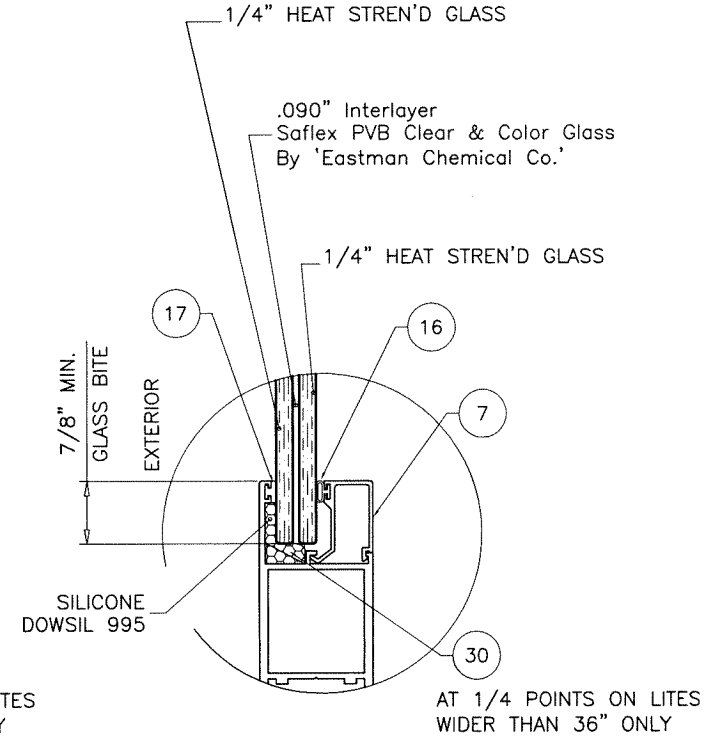

**GLASS TYPE 'D'**

9/16" OVERALL LAMINATED GLASS

**ALUMINUM AND GLASS SLIDING GLASS DOOR**

DESIGN LOAD RATING FOR DOORS TO BE AS PER CHARTS SHOWN ON SHEETS 2 & 2.1

THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

1BY OR 2BY WOOD BUCKS & BUCK FASTENERS BY OTHERS, MUST BE DESIGNED AND INSTALLED ADEQUATELY TO TRANSFER APPLIED PRODUCT LOADS TO THE BUILDING STRUCTURE.

ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.

A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

ALL SHIMS TO BE HIGH IMPACT, NON-METALLIC AND NON-COMPRESSIBLE.

MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2023 FLORIDA BLDG. CODE & ADOPTED STANDARDS.

THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC.

CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.

DESIGN LOADS SHOWN ARE BASED ON 'ALLOWABLE STRESS DESIGN (ASD)'.

MANUFACTURER'S LABEL SHALL BE LOCATED ON A READILY VISIBLE LOCATION IN ACCORDANCE WITH SECTION 1709.9.3 OF FLORIDA BUILDING CODE. LABELING TO COMPLY WITH SECTION 1709.9.2.


NOTE:  
GLASS CAPACITIES ARE  
BASED ON ASTM E1300-09 (3 SEC. GUSTS)  
AND FLORIDA BUILDING COMMISSION  
DECLARATORY STATEMENT DCA05-DEC-219

THESE DOORS ARE RATED FOR LARGE & SMALL MISSILE IMPACT.  
SHUTTERS ARE NOT REQUIRED.

Sealed: 3/23/2026

FL #48120

A- CONTRACTOR TO BE RESPONSIBLE FOR THE SELECTION, PURCHASE AND INSTALLATION OF THIS PRODUCT BASED ON THIS PRODUCT EVALUATION PROVIDED HE/SHE DOES NOT DEVIATE FROM THE CONDITIONS DETAILED ON THIS DOCUMENT.  
B- THIS PRODUCT EVALUATION DOCUMENT WILL BE CONSIDERED INVALID IF ALTERED BY ANY MEANS.  
C- SITE SPECIFIC PROJECTS SHALL BE PREPARED BY A FLORIDA REGISTERED ENGINEER OR ARCHITECT WHICH WILL BECOME THE ENGINEER OF RECORD (E.O.R.) FOR THE PROJECT AND WHO WILL BE RESPONSIBLE FOR THE PROPER USE OF THE P.E.D. ENGINEER OF RECORD, ACTING AS A DELEGATED ENGINEER TO THE P.E.D. ENGINEER SHALL SUBMIT TO THIS LATTER THE SITE SPECIFIC DRAWINGS FOR REVIEW.  
D- THIS P.E.D. SHALL BEAR THE DATE AND ORIGINAL SEAL AND SIGNATURE OF THE PROFESSIONAL ENGINEER OF RECORD THAT PREPARED IT.

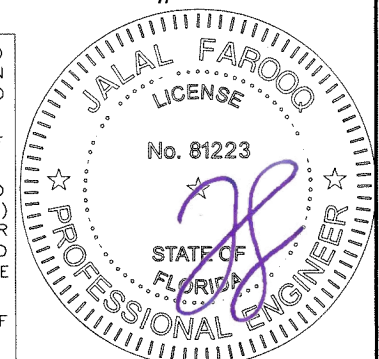

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)

**Eurotech Industries Inc.**

4201 N.E. 12th Terrace  
Oakland Park, Florida 33334

Tel. (954) 630-9967

www.etiwindows.com

**AL-FAROOQ CORPORATION**  
ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100  
FBPE #3538  
WWW.AFCENG.COM  
COMP-ANL\26-05F-EWD


|             |          |          |         |             |
|-------------|----------|----------|---------|-------------|
| revisions:  | no       | date     | by      | description |
|             |          |          |         |             |
|             |          |          |         |             |
|             |          |          |         |             |
|             |          |          |         |             |
| date:       | 02-23-26 | scale:   | -       |             |
| dr. by:     | TARIQ    | chk. by: |         |             |
| drawing no. | 26-05F   | sheet    | 1 of 17 |             |



| DESIGN LOAD CAPACITY - PSF       |                                |                     |         |                     |         |
|----------------------------------|--------------------------------|---------------------|---------|---------------------|---------|
| AVERAGE<br>PANEL WIDTH<br>INCHES | DOOR FRAME<br>HEIGHT<br>INCHES | GLASS TYPE 'C'      |         |                     |         |
|                                  |                                | REINF.<br>LEVEL '1' |         | REINF.<br>LEVEL '2' |         |
|                                  |                                | EXT.(+)             | INT.(-) | EXT.(+)             | INT.(-) |
| 36                               | 82                             | 65.0                | 65.0    | 65.0                | 65.0    |
| 42                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 48                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 48-3/4                           |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 49-1/2                           |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 54                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 60-3/4                           |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 66                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 72                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 36                               | 90                             | 65.0                | 65.0    | 65.0                | 65.0    |
| 42                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 48                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 48-3/4                           |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 49-1/2                           |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 54                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 60-3/4                           |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 66                               |                                | 65.0                | 65.0    | -                   | -       |
| 36                               | 99                             | 65.0                | 65.0    | 65.0                | 65.0    |
| 42                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 48                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 48-3/4                           |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 49-1/2                           |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 54                               |                                | 65.0                | 65.0    | 65.0                | 65.0    |
| 60-3/4                           |                                | 65.0                | 65.0    | -                   | -       |
| 36                               | 108                            | -                   | -       | 65.0                | 65.0    |
| 42                               |                                | -                   | -       | 65.0                | 65.0    |
| 48                               |                                | -                   | -       | 65.0                | 65.0    |
| 48-3/4                           |                                | -                   | -       | 65.0                | 65.0    |
| 49-1/2                           |                                | -                   | -       | 65.0                | 65.0    |
| 36                               | 120                            | -                   | -       | 65.0                | 65.0    |
| 42                               |                                | -                   | -       | 65.0                | 65.0    |
| 48                               |                                | -                   | -       | 65.0                | 65.0    |

ALL EXTERIOR(+) LOADS SHOWN IN CHARTS ABOVE ARE FOR INSTALLATIONS WHERE WATER INFILTRATION RESISTANCE IS NOT REQUIRED.


FOR INSTALLATIONS WHERE WATER INFILTRATION RESISTANCE IS REQUIRED  
LIMIT MAX. EXT.(+) LOADS TO 50.0 FOR MAX. PANEL AREA OF 60.75 SQ. FT.

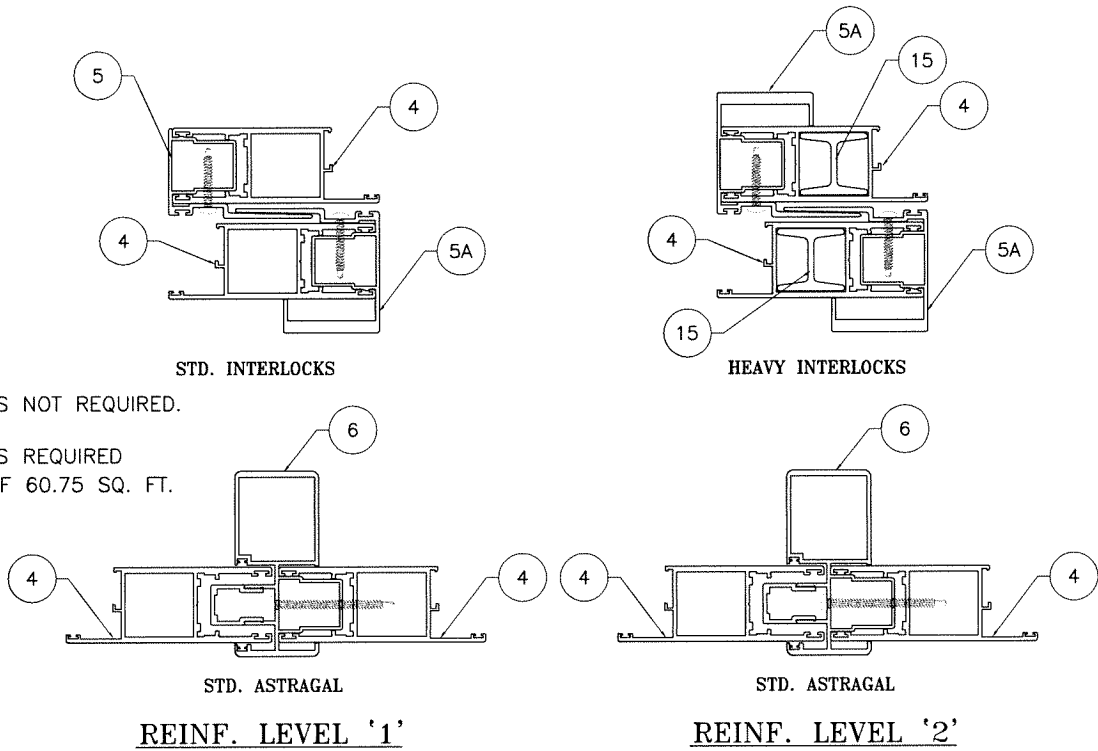

NOTE:  
THREE (3) TRACK AND POCKET DOORS ARE LIMITED TO  
MAX. PANEL AREA OF 40 SQ. FT.  
MAX. DESIGN LOAD OF ±70.0 PSF

$$\text{AVERAGE PANEL WIDTH} = \frac{\text{DOOR FRAME WIDTH}}{\text{NUMBER OF PANELS}}$$

| DESIGN LOAD CAPACITY - PSF       |                                |                     |         |
|----------------------------------|--------------------------------|---------------------|---------|
| AVERAGE<br>PANEL WIDTH<br>INCHES | DOOR FRAME<br>HEIGHT<br>INCHES | GLASS TYPE 'D'      |         |
|                                  |                                | REINF.<br>LEVEL '1' |         |
|                                  |                                | EXT.(+)             | INT.(-) |
| 36                               | 84                             | 80.0                | 80.0    |
| 42                               |                                | 80.0                | 80.0    |
| 48                               |                                | 80.0                | 80.0    |
| 48-3/4                           |                                | 80.0                | 80.0    |
| 49-1/2                           |                                | 80.0                | 80.0    |
| 54                               |                                | 80.0                | 80.0    |
| 36                               | 96                             | 80.0                | 80.0    |
| 42                               |                                | 80.0                | 80.0    |
| 48                               |                                | 80.0                | 80.0    |
| 48-3/4                           |                                | 80.0                | 80.0    |
| 49-1/2                           |                                | 80.0                | 80.0    |
| 36                               | 99                             | 80.0                | 80.0    |
| 42                               |                                | 80.0                | 80.0    |
| 48                               |                                | 80.0                | 80.0    |
| 48-3/4                           |                                | 80.0                | 80.0    |

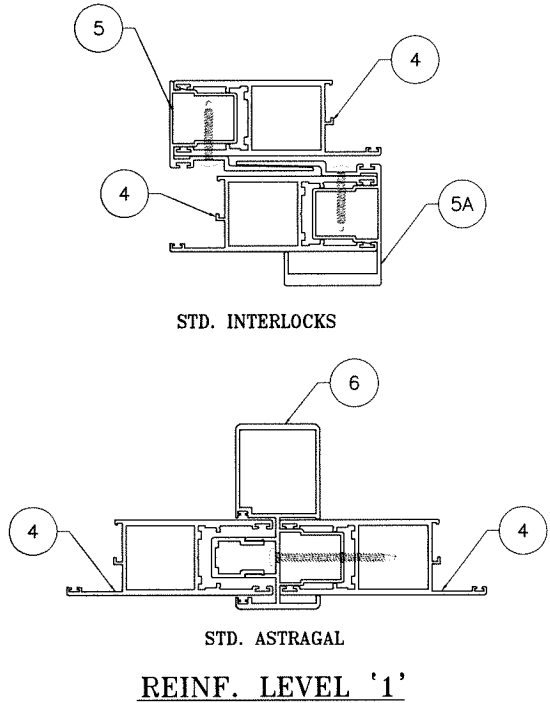

Sealed: 3/23/2026



FL #48120

**AL-FAROOQ CORPORATION**  
ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100  
WWW.AFCENG.COM  
FBPE #3538

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)


**Eurotech Industries Inc.**  
4201 N.E. 12th Terrace  
Oakland Park, Florida 33334  
Tel. (954) 630-9967  
www.etiwindows.com

revisions:

| no | date | by | description |
|----|------|----|-------------|
|    |      |    |             |
|    |      |    |             |
|    |      |    |             |
|    |      |    |             |


date: 02-23-26  
scale: 3/8" = 1"  
dr. by: TARIQ  
chk. by:

drawing no.  
**26-05F**  
sheet 2.1 of 17




FL #48120







OX (SHOWN)  
XO  
XX







OX-X (SHOWN)  
X-XO



OX-O (SHOWN)

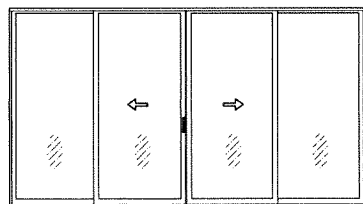

OX-XO (SHOWN)  
OX-XX  
XX-XO  
XX-XX

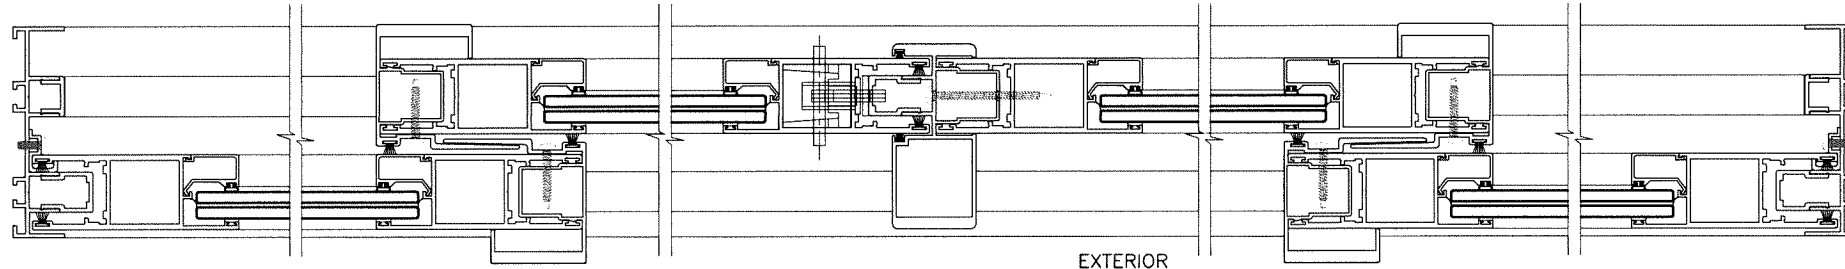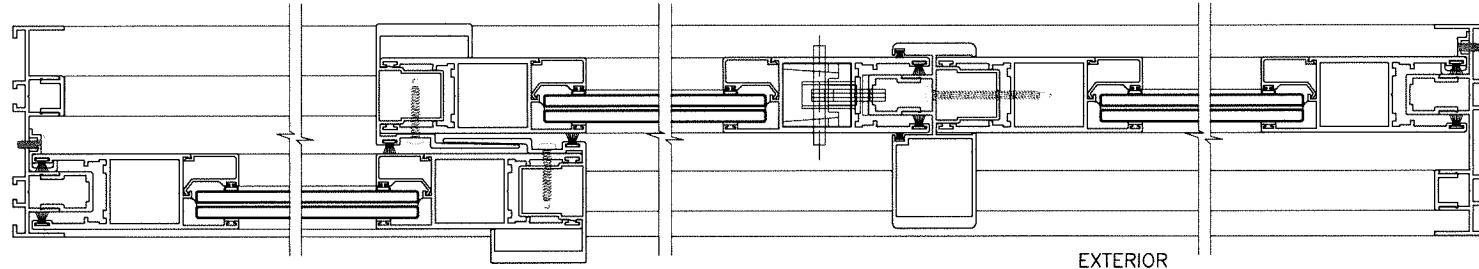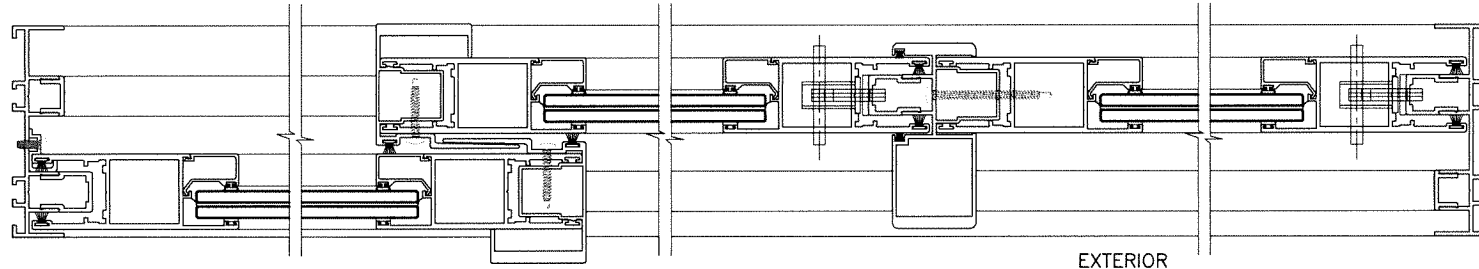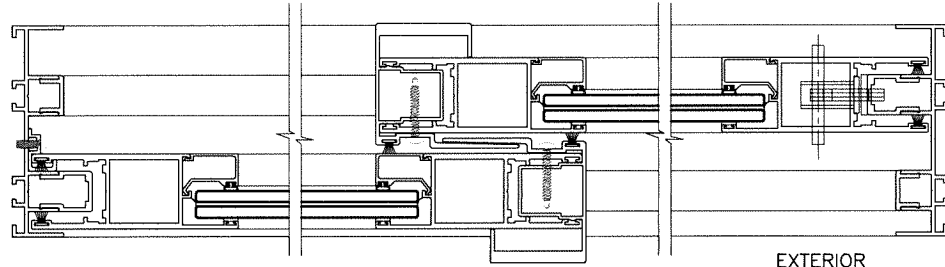


NOTE:

1. CONFIGURATIONS SHOWN FOR ILLUSTRATION PURPOSES ONLY.
2. FOR APPLICABLE DESIGN PRESSURES SEE INSTRUCTIONS IN SHEET 1.
3. FOR ANCHOR DETAILS SEE SHEETS 10 THRU 14.

APPROVED CONFIGURATIONS  
NON-POCKETED DOORS  
TWO (2) TRACKS

Sealed: 3/23/2026

FL #48120

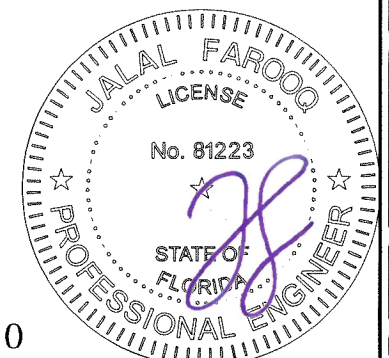

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)

Eurotech Industries Inc.

4201 N.E. 12th Terrace  
Oakland Park, Florida 33334  
Tel. (954) 630-9967

www.etiwindows.com

AL-FAROOQ CORPORATION

ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100

FBPE #3538

WWW.AFCENG.COM

COMP-ANL\26-05F-EWD

revisions:  
no date by description

date: 02-23-26

scale: -


dr. by: TARIQ

chk. by:


drawing no.

26-05F

sheet 5 of 17




OXX (SHOWN)  
XXO  
XXX

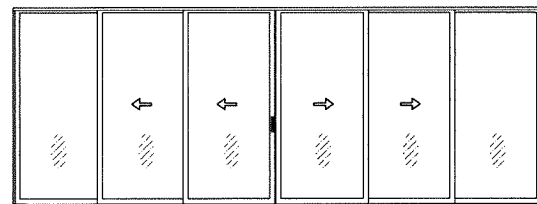


OXX-XXO (SHOWN)  
OXX-XXX  
XXX-XXO  
XXX-XXX

APPROVED CONFIGURATIONS  
NON-POCKETED DOORS  
THREE (3) TRACKS

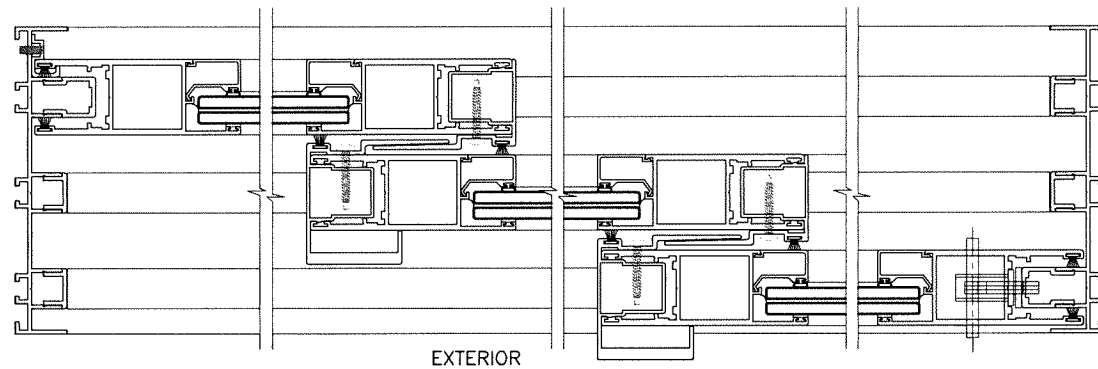


EXTERIOR

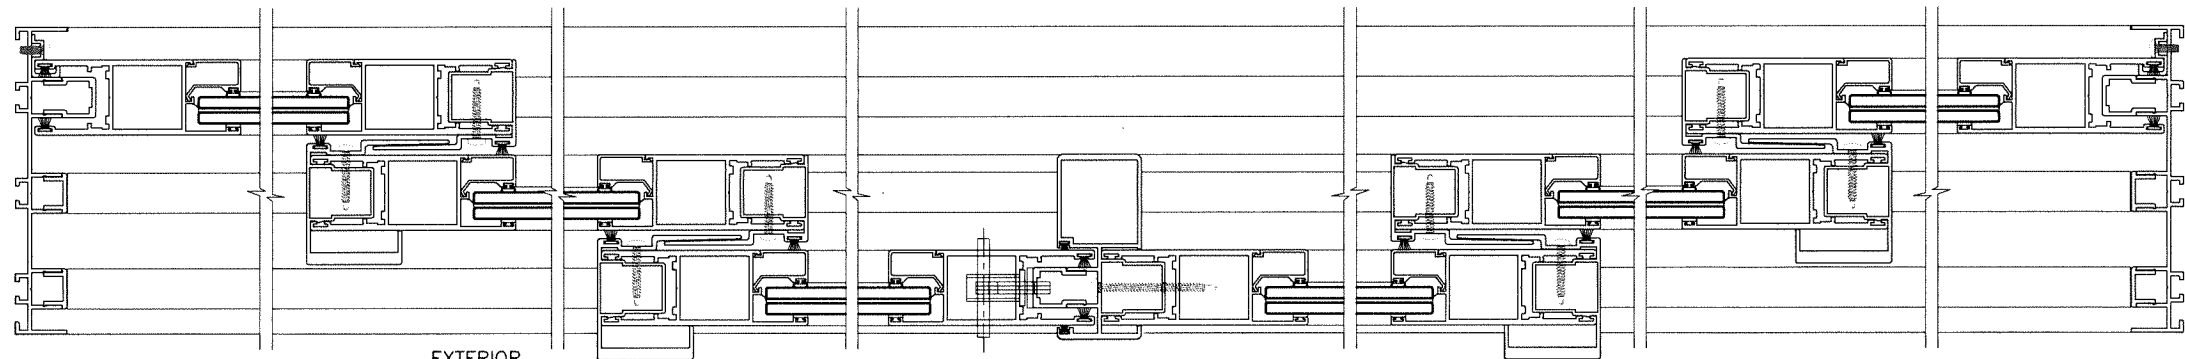

EXTERIOR

NOTE:

1. CONFIGURATIONS SHOWN FOR ILLUSTRATION PURPOSES ONLY.
2. FOR APPLICABLE DESIGN PRESSURES SEE INSTRUCTIONS IN SHEET 1.
3. FOR ANCHOR DETAILS SEE SHEETS 10 THRU 14.

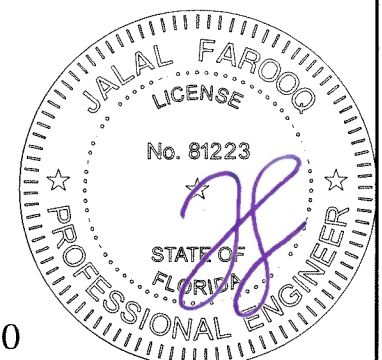

Sealed: 3/23/2026




FL #48120

**af c**  
**AL-FAROOQ CORPORATION**  
ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100  
WWW.AFCENG.COM  
FBPE #3538  
COMP-ANL\26-05F-EWD

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)

**Eurotech Industries Inc.**  
4201 N.E. 12th Terrace  
Oakland Park, Florida 33334  
Tel. (954) 630-9967  
www.etiwindows.com

| revisions:  |          | no     |   | date          |       | by description |  |
|-------------|----------|--------|---|---------------|-------|----------------|--|
| date:       | 02-23-26 | scale: | - | dr. by:       | TARIQ | chk. by:       |  |
| drawing no. |          | 26-05F |   | sheet 6 of 17 |       |                |  |



1. CONFIGURATIONS SHOWN FOR ILLUSTRATION PURPOSES ONLY.
2. FOR APPLICABLE DESIGN PRESSURES SEE INSTRUCTIONS IN SHEET 1.
3. FOR ANCHOR DETAILS SEE SHEETS 10 THRU 14.

APPROVED CONFIGURATIONS  
POCKETED DOORS  
TWO (2) TRACKS

Sealed: 3/23/2026

FL #48120

[illegible]

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)

Eurotech Industries Inc.

4201 N.E. 12th Terrace  
Oakland Park, Florida 33334

Tel. (954) 630-9967

www.etiwindows.com

**AL-FAROOQ CORPORATION**  
ENGINEERS & PRODUCT DEVELOPMENT

ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220

9360 SUNSET DRIVE, SU  
MIAMI, FLORIDA 33173

MIAMI, FLORIDA 33101  
TEL. (305) 264-8100

WWW.AFCENG.COM

TEL. (305) 264-8100

FBPE #3538

COMP-ANL\26-05F-EWD

OXX-XXXP(SHOWN)  
PXXX-XXX  
PXXX-XXXP

XXXXP (SHOWN)  
PXXX

EXTERIOR

EXTERIOR


POCKET NOT PART  
OF THIS APPROVAL

NOTE:

1. CONFIGURATIONS SHOWN FOR ILLUSTRATION PURPOSES ONLY.
2. FOR APPLICABLE DESIGN PRESSURES SEE INSTRUCTIONS IN SHEET 1.
3. FOR ANCHOR DETAILS SEE SHEETS 10 THRU 14.

APPROVED CONFIGURATIONS  
POCKETED DOORS  
THREE (3) TRACKS

Sealed: 3/23/2026

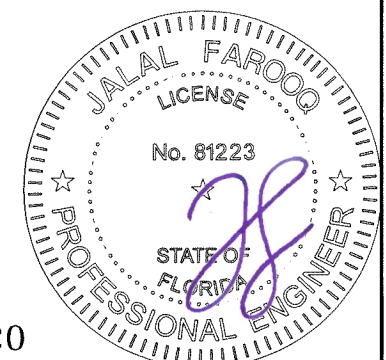

|            |    |             |  |
|------------|----|-------------|--|
| revisions: |    |             |  |
| no date    | by | description |  |

date: 02-23-26

scale: —

dr. by: TARIQ

chk. by:

drawing no.

26-05F

sheet 8 of 17

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)

Eurotech Industries Inc.

4201 N.E. 12th Terrace  
Oakland Park, Florida 33334

Tel. (954) 630-9967

www.etiwindows.com

**AL-FAROOQ CORPORATION**  
ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100 [WWW.AFCENG.COM](http://WWW.AFCENG.COM)




TEL: (303) 207-1100  
FRRF #3538

FBPE #3538

COMP-ANL\26-

COMP-ANL\26-05F-EWD



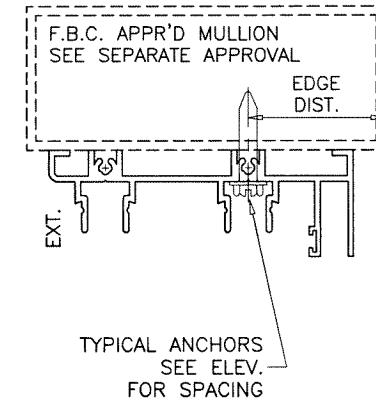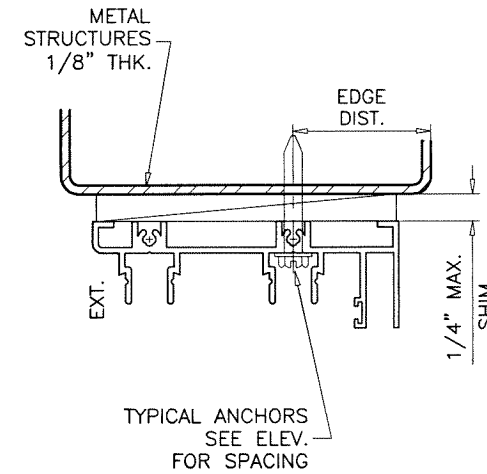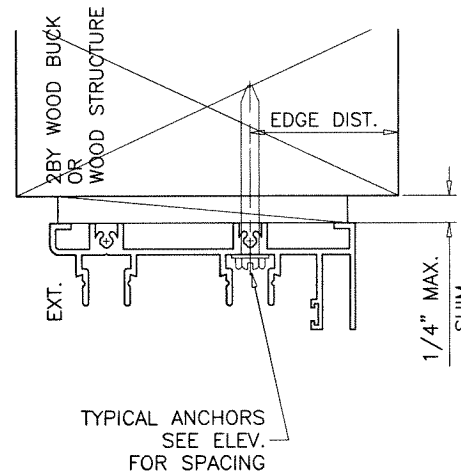

1BY OR 2BY WOOD BUCKS AND METAL STRUCTURE NOT BY 'EUROTECH' MUST SUSTAIN LOADS IMPOSED BY GLAZING SYSTEM AND TRANSFER THEM TO THE BUILDING STRUCTURE.

**TYPICAL ANCHORS:** SEE ELEV. FOR SPACING

**5/16" DIA. ULTRACON BY 'DEWALT'** ( $F_u=177$  KSI,  $F_y=155$  KSI)  
 INTO 2BY WOOD BUCKS OR WOOD STRUCTURES  
 1-1/2" MIN. PENETRATION INTO WOOD (HEAD/JAMBS)

THRU 1BY BUCKS INTO CONC. OR BLOCKS  
 1-3/4" MIN. EMBED INTO CONCRETE (HEAD/JAMBS)  
 1-3/4" MIN. EMBED INTO GROUT-FILLED BLOCKS (JAMBS)

**5/16" DIA. ULTRACON BY 'DEWALT'** ( $F_u=177$  KSI,  $F_y=155$  KSI)  
 DIRECTLY INTO CONCRETE OR BLOCKS  
 1-3/4" MIN. EMBED INTO CONCRETE (HEAD/SILL/JAMBS)  
 1-3/4" MIN. EMBED INTO GROUT-FILLED BLOCKS (JAMBS)

**5/16" DIA. TEKS OR SELF-DRILLING SCREWS** (GRADE 5 CRS)  
 INTO F.B.C. APPROVED MULLIONS  
 OR  
 INTO METAL STRUCTURES (HEAD/JAMBS)  
 (3) THREADS MIN. TO EXTEND BEYOND METAL THICKNESS  
 ALUMINUM: 1/8" THK. MIN. (6063-T5 MIN.)  
 STEEL: 1/8" THK. MIN. ( $F_y = 36$  KSI MIN.)  
 (STEEL IN CONTACT WITH ALUMINUM TO BE PLATED OR PAINTED)

#### CRITICAL EDGE DISTANCE


INTO CONCRETE AND BLOCKS = 2-1/2" MIN.  
 INTO WOOD STRUCTURE = 1-1/4" MIN.  
 INTO METAL STRUCTURE = 3/4" MIN.

WOOD AT HEAD OR JAMBS SG = 0.55 MIN.  
 CONCRETE AT HEAD, SILL OR JAMBS  $f'_c = 3000$  PSI MIN.  
 C-90 GROUT-FILLED BLOCK AT JAMBS  $f'_m = 2000$  PSI MIN.


ANCHORS MAY BE HEX OR FLAT HEAD

Sealed: 3/23/2026

2 TRACK FRAMES

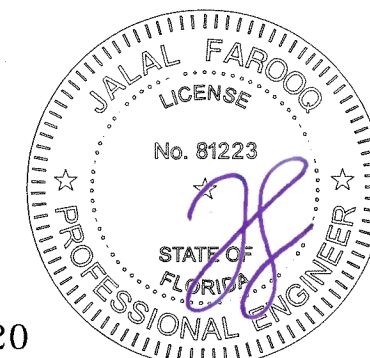

FL #48120



**AL-FAROOQ CORPORATION**  
 ENGINEERS & PRODUCT DEVELOPMENT  
 9360 SUNSET DRIVE, SUITE 220  
 MIAMI, FLORIDA 33173  
 TEL. (305) 264-8100  
 WWW.AFCENG.COM  
 FBPE #3538

COMP-ANL\26-05F-EWD

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)

**Eurotech Industries Inc.**  
 4201 N.E. 12th Terrace  
 Oakland Park, Florida 33334  
 Tel. (954) 630-9967  
 www.etiwindows.com

| revisions: |             |
|------------|-------------|
| no         | description |
|            |             |
|            |             |
|            |             |
|            |             |
|            |             |

date: 02-23-26

scale: 3/8" = 1"



dr. by: TARIQ

chk. by:

drawing no.

26-05F

sheet 10 of 17

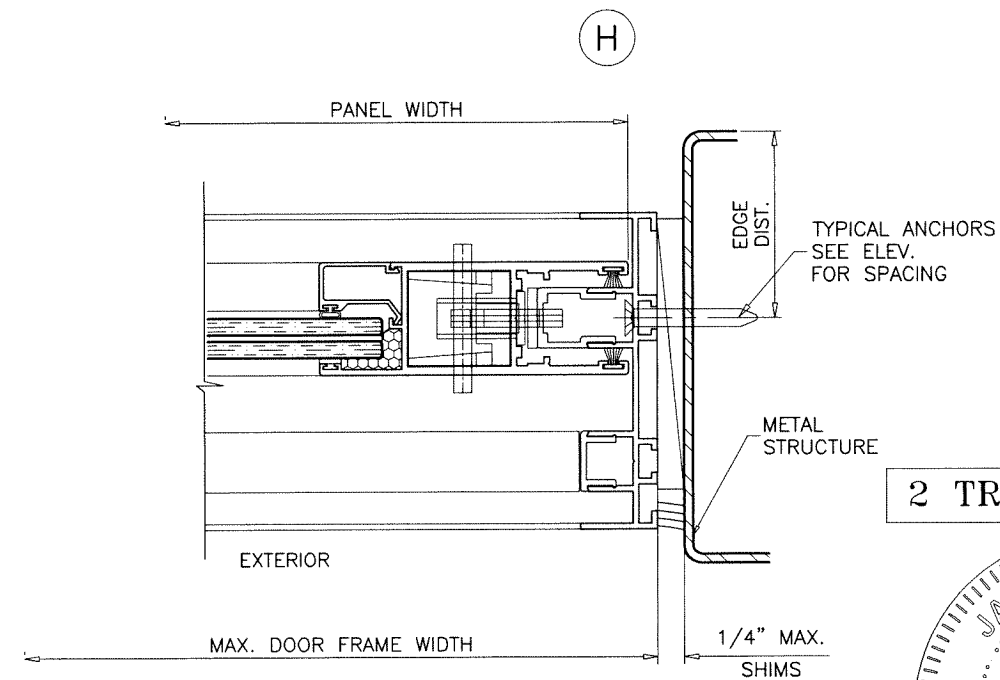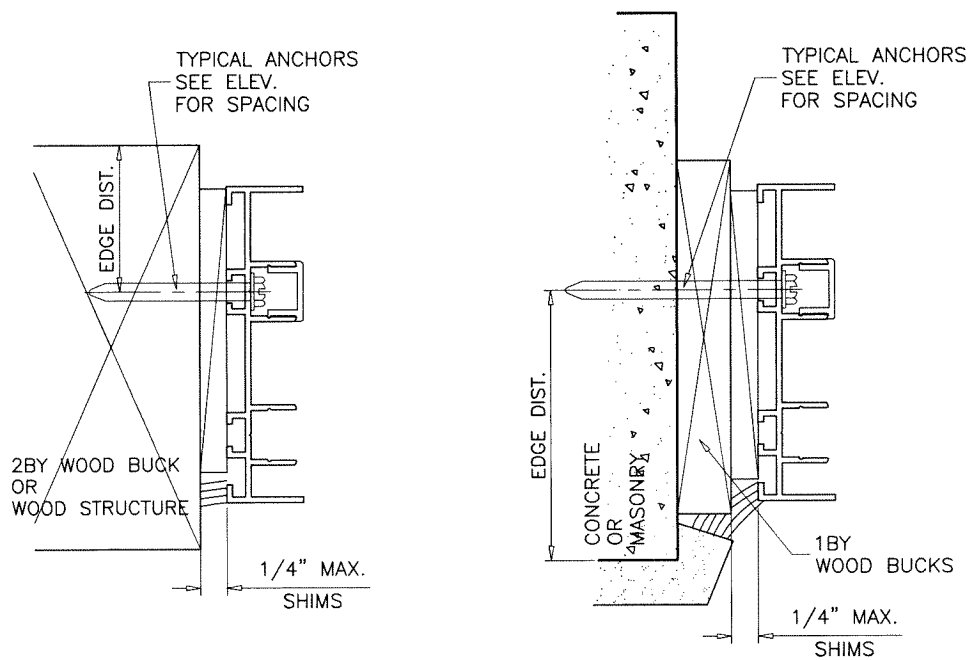



A circular professional engineer seal for Jalal Farooq. The outer ring contains the text "JALAL FAROOQ" at the top and "PROFESSIONAL ENGINEER" at the bottom, separated by two stars. Inside this ring, the word "LICENSE" is at the top and "STATE OF FLORIDA" is at the bottom, also separated by two stars. In the center, the license number "No. 81223" is displayed. A stylized signature in blue ink is written across the center of the seal, overlapping the license number and the state name.

FL #48120

|                  |    |            |                |
|------------------|----|------------|----------------|
| date: 02-23-26   |    | revisions: |                |
| scale: 3/8" = 1" | no | date       | by description |
| dr. by: TARIQ    |    |            |                |
|                  |    |            |                |
|                  |    |            |                |
|                  |    |            |                |
| chk. by:         |    |            |                |


drawing no. 26-05F

sheet 11 of 17

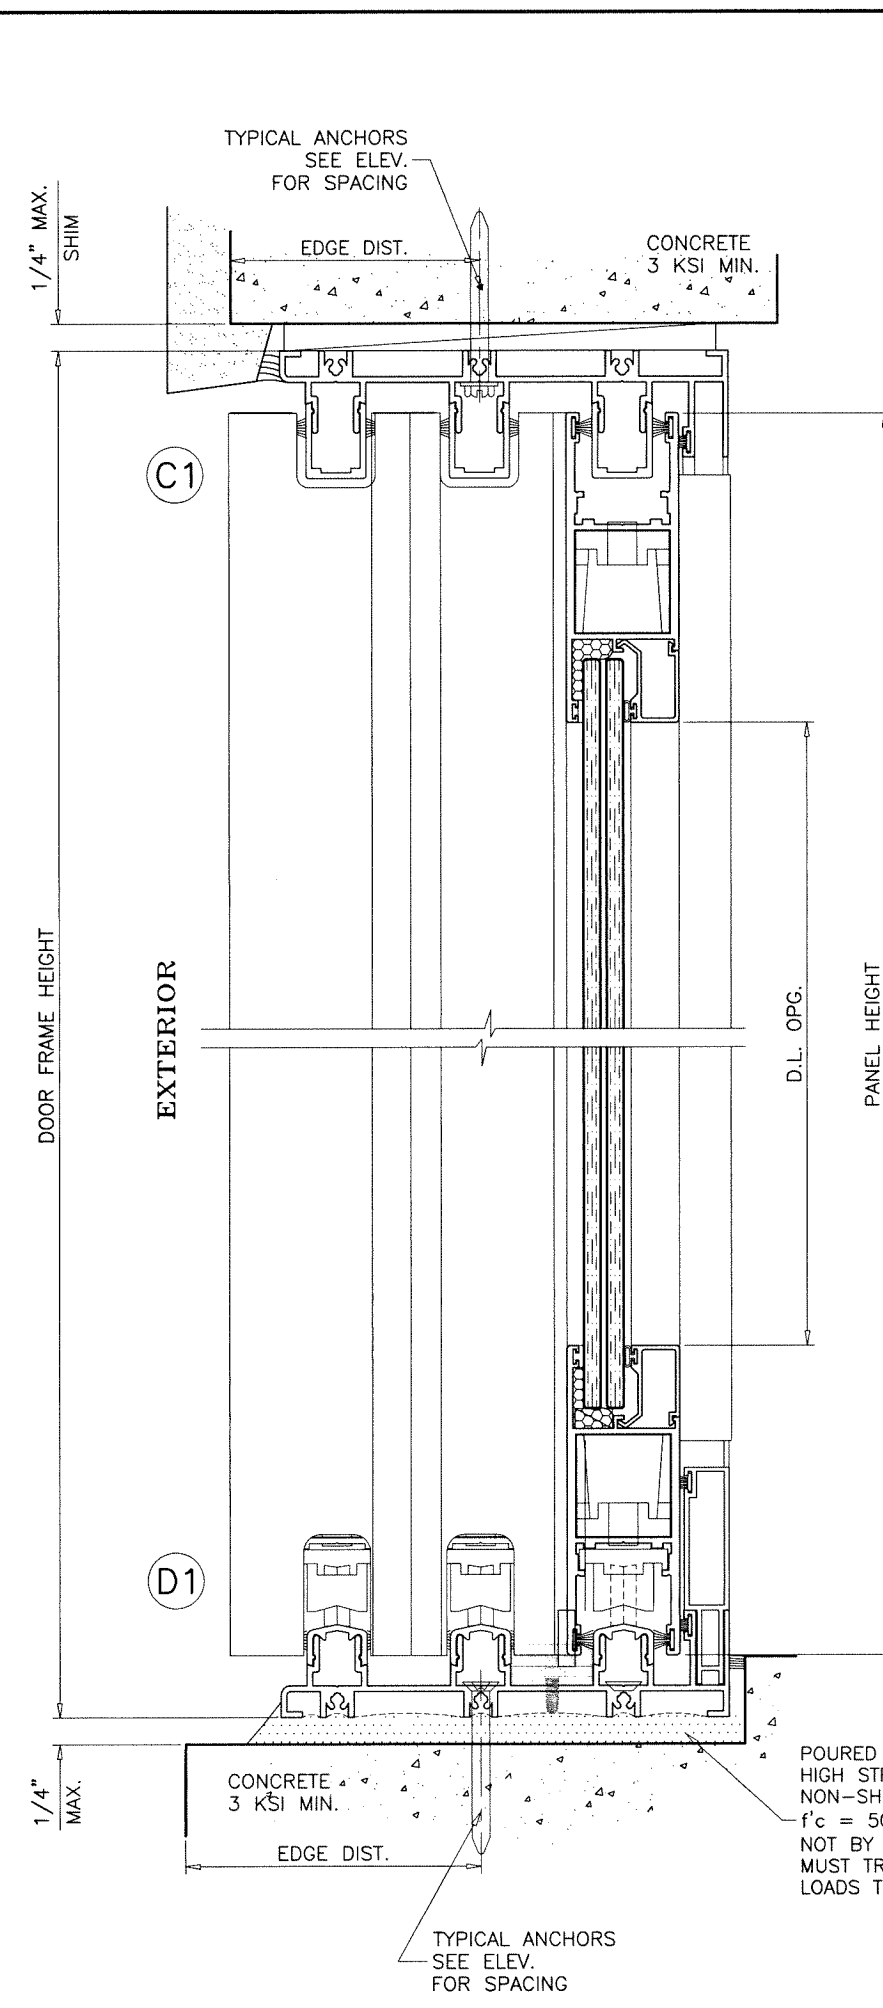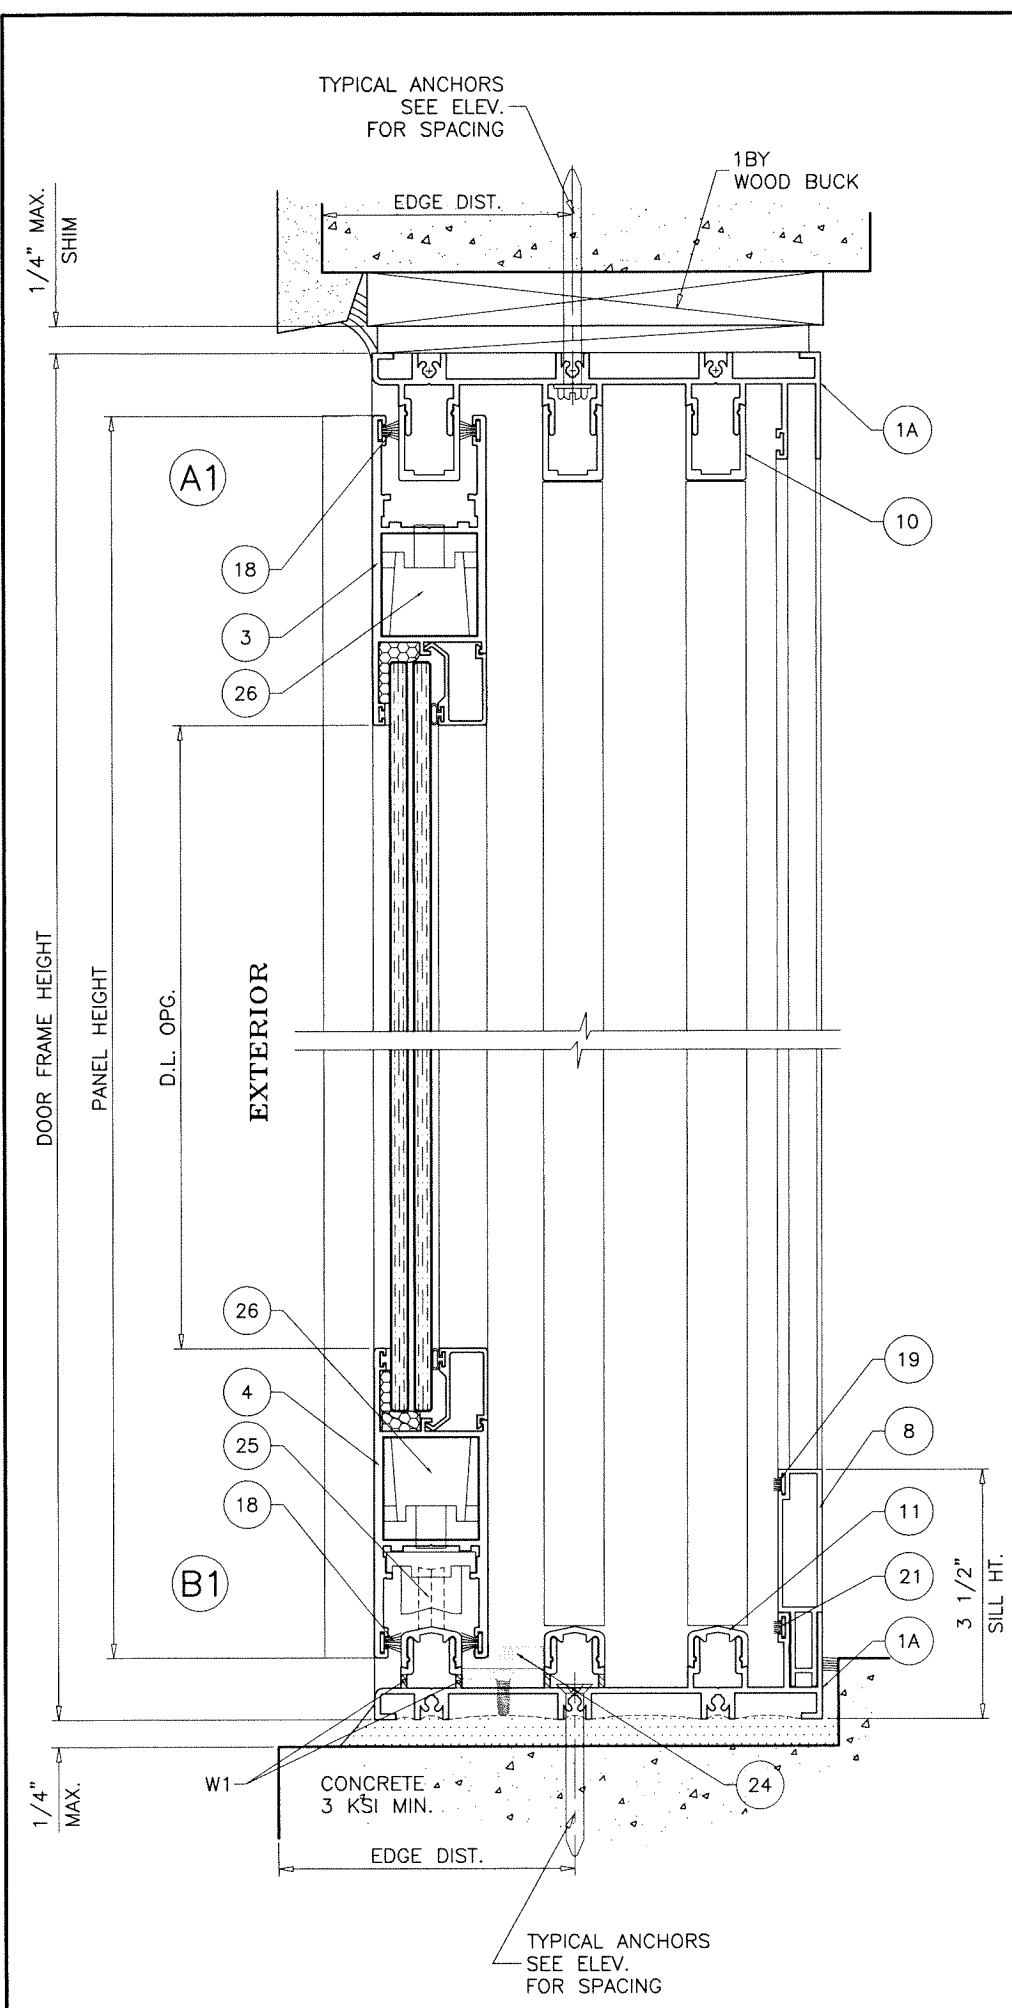

Sealed: 3/23/2026

### 3 TRACK FRAMES

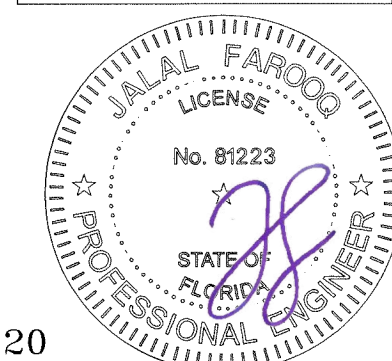

FL #48120




**AL-FAROOQ CORPORATION**  
ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100  
WWW.AFCENG.COM  
FBPE #3538

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)

**Eurotech Industries Inc.**  
452011 S.W. 131th Avenue 24  
Oklahoma City, OK 73172 33334  
Tel. (954) 6330-9987 www.etiwindows.com


| revisions: |                     |
|------------|---------------------|
| no         | date by description |
|            |                     |
|            |                     |
|            |                     |
|            |                     |
|            |                     |

|                    |                  |                |          |
|--------------------|------------------|----------------|----------|
| date: 02-23-26     | scale: 3/8" = 1" | dr. by: TARIQ  | chk. by: |
| drawing no. 26-05F |                  | sheet 12 of 17 |          |

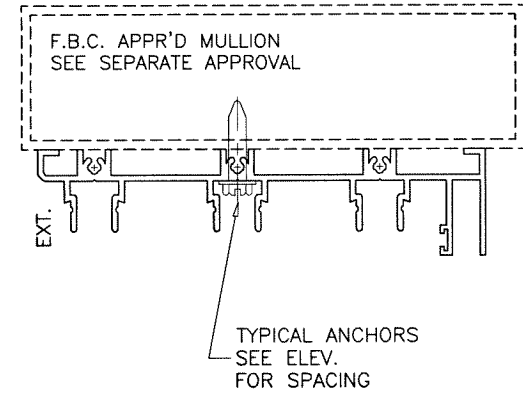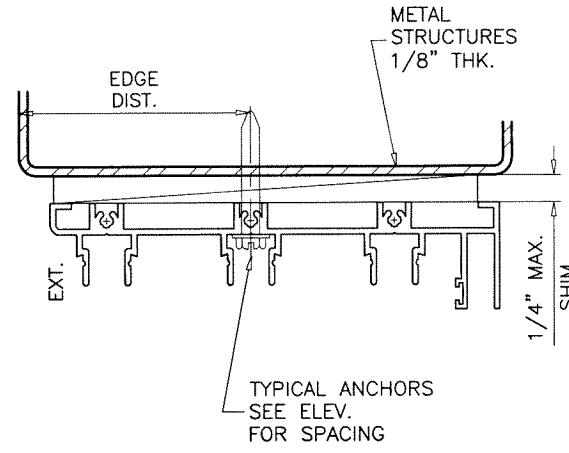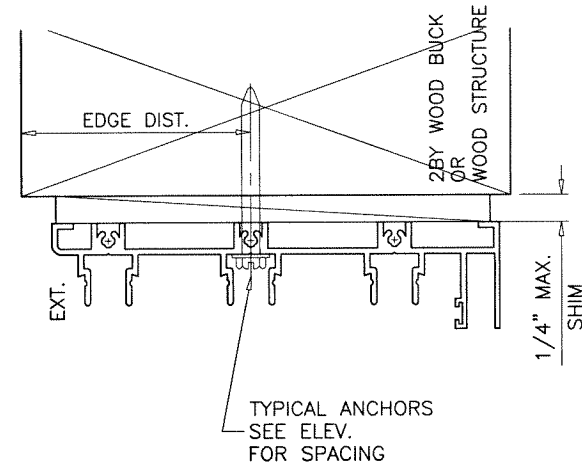

Sealed: 3/23/2026

3 TRACK FRAMES

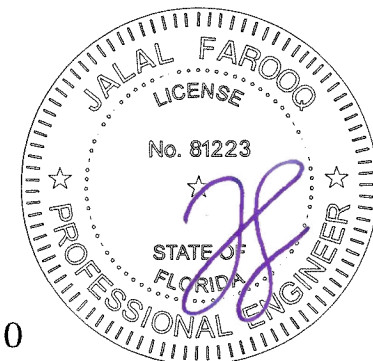





FL #48120

|                |  |                  |      |                |             |          |  |
|----------------|--|------------------|------|----------------|-------------|----------|--|
| date: 02-23-26 |  | scale: 3/8" = 1" |      | dr. by: TARIQ  |             | chk. by: |  |
| drawing no.    |  | 26-05F           |      | sheet 13 of 17 |             |          |  |
| revisions:     |  | no               | date | by             | description |          |  |
|                |  |                  |      |                |             |          |  |
|                |  |                  |      |                |             |          |  |
|                |  |                  |      |                |             |          |  |
|                |  |                  |      |                |             |          |  |

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)  
**Eurotech Industries Inc.**  
 4201 N.E. 12th Terrace  
 Oakland Park, Florida 33334  
 Tel. (954) 630-9967  
 www.etiwindows.com


**AL-FAROOQ CORPORATION**  
 ENGINEERS & PRODUCT DEVELOPMENT  
 9360 SUNSET DRIVE, SUITE 220  
 MIAMI, FLORIDA 33173  
 TEL. (305) 264-8100  
 FBPE #3538  
 WWW.AFCENG.COM  
 COMP-ANL \ 26-05F-EWD



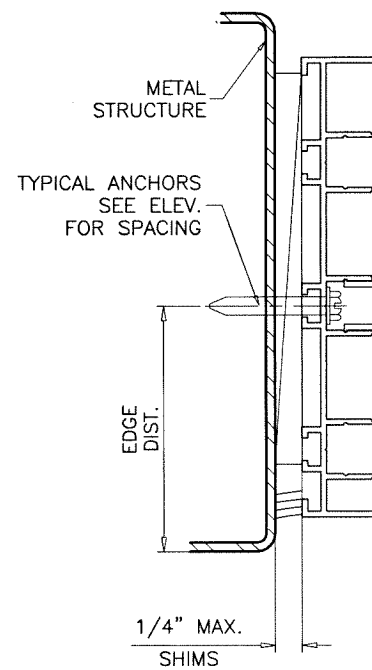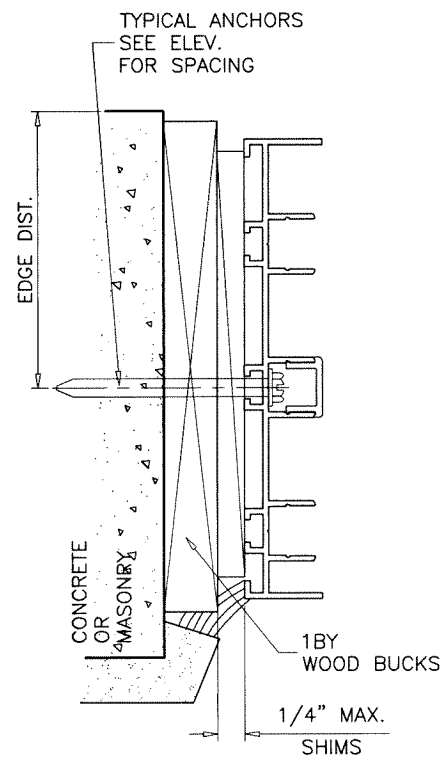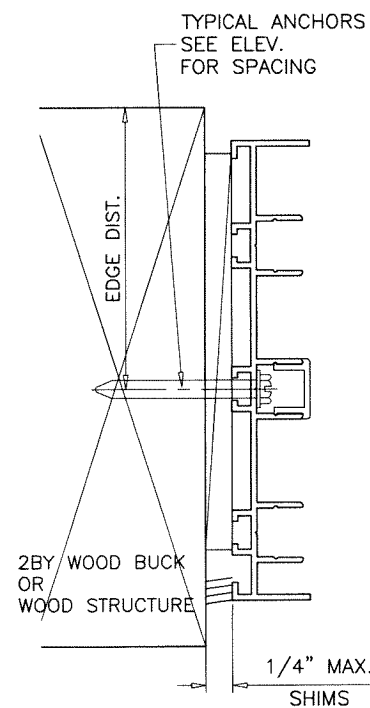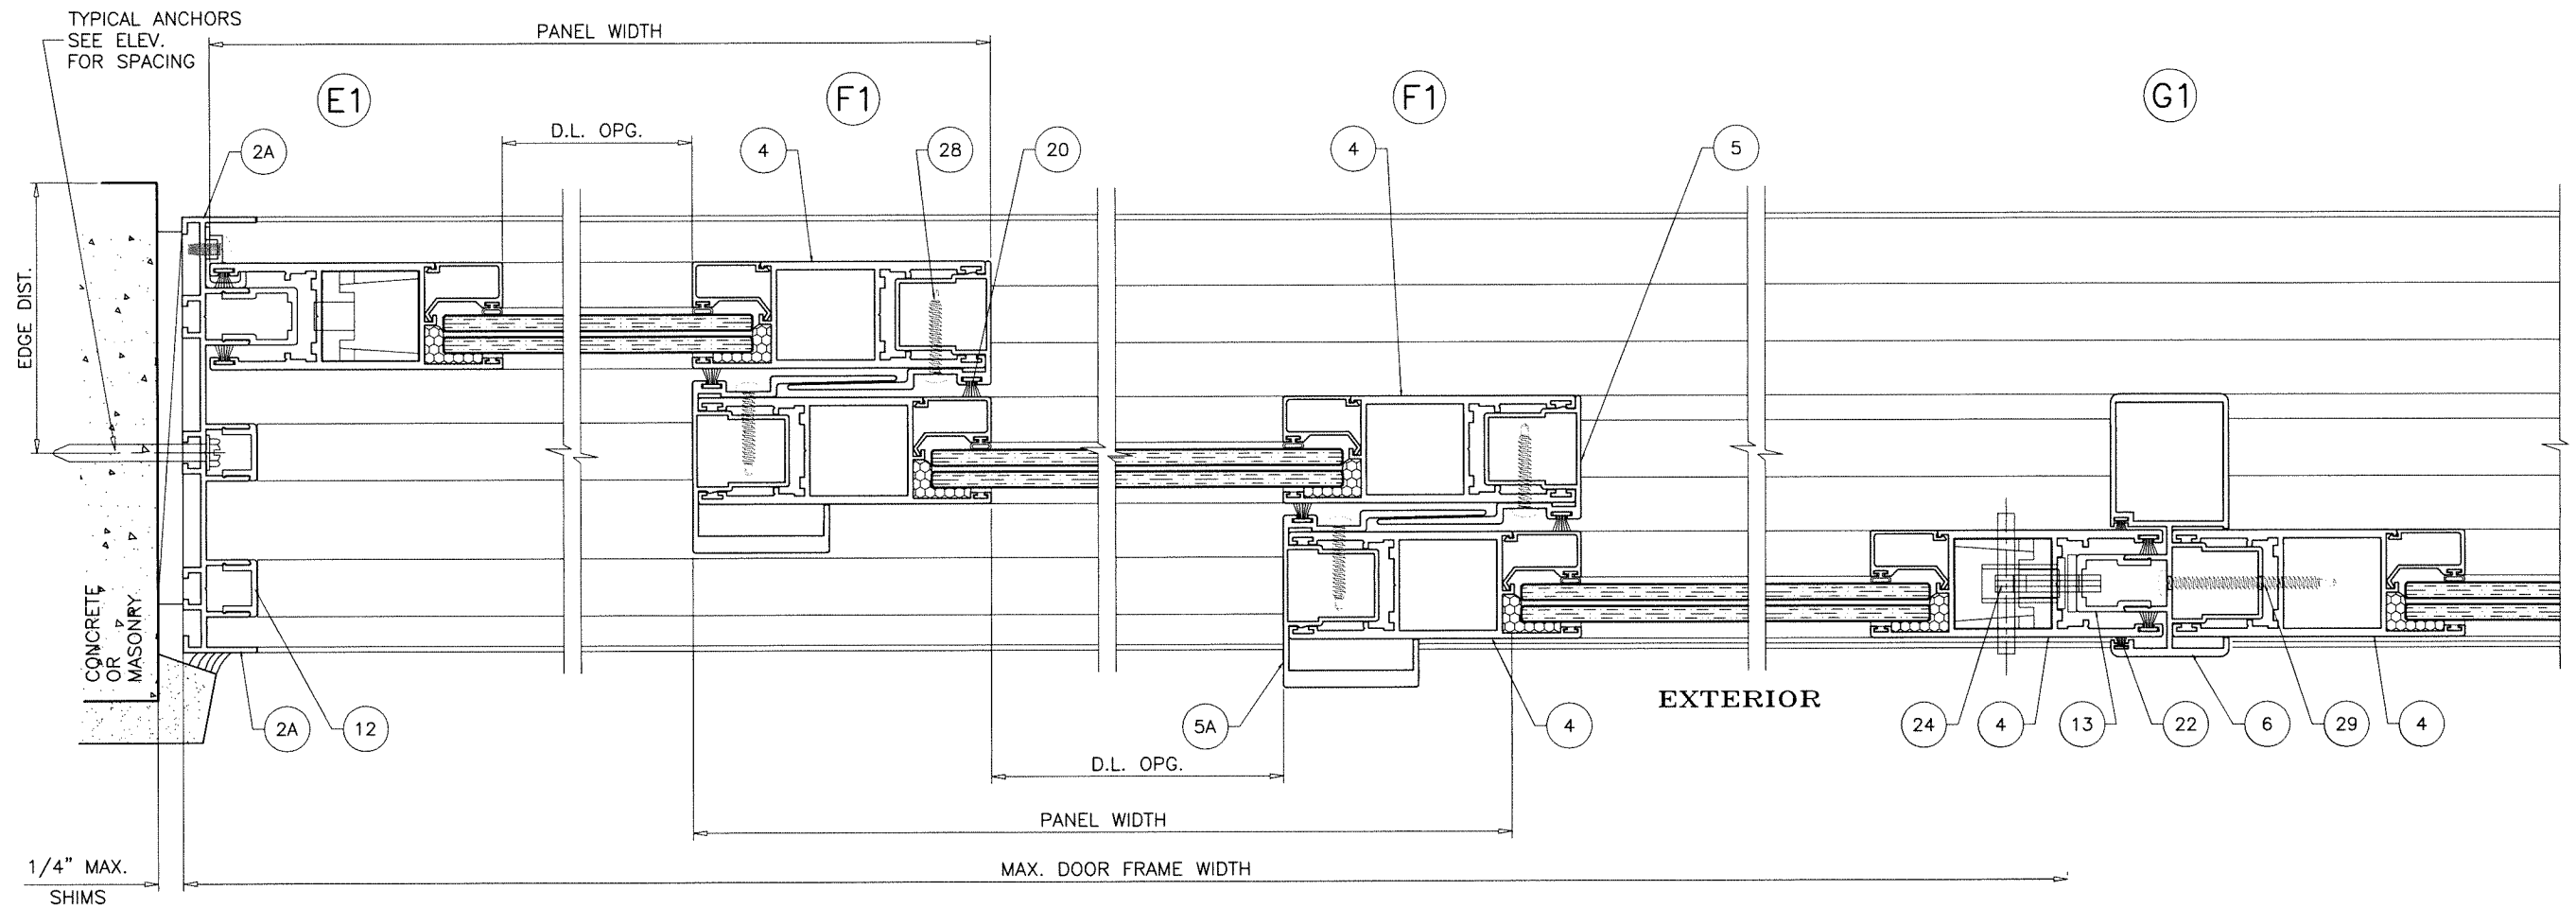

Sealed: 3/23/2026

### 3 TRACK FRAMES

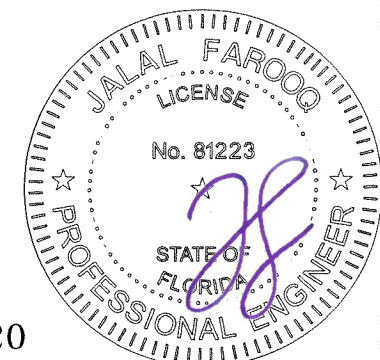

FL #48120

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)

**Eurotech Industries Inc.**

4201 N.E. 12th Terrace  
Oakland Park, Florida 33334  
Tel. (954) 630-9967

www.etiwindows.com

**AL-FAROOQ CORPORATION**

ENGINEERS & PRODUCT DEVELOPMENT

9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100

WWW.AFCENG.COM

FBPE #3538

COMP-ANL\26-05F-EWD

revisions:  
no. date by description

date: 02-23-26

scale: 3/8" = 1"

dr. by: TARIQ

chk. by:

drawing no.

26-05F

sheet 14 of 17



| ITEM # | PART #       | REQD.    | DESCRIPTION                                  | MATERIAL  | MANF./SUPPLIER/REMARKS |
|--------|--------------|----------|----------------------------------------------|-----------|------------------------|
| 1      | -            | 1        | FRAME HEAD/SILL (2 TRACK)                    | 6005A-T5  | -                      |
| 1A     | -            | AS REQD. | FRAME HEAD/SILL (3 TRACK)                    | 6005A-T5  | -                      |
| 2      | -            | 2        | FRAME JAMB (2 TRACK)                         | 6005A-T5  | -                      |
| 2A     | -            | AS REQD. | FRAME JAMB (3 TRACK)                         | 6005A-T5  | -                      |
| 3      | -            | 1/ PANEL | TOP RAIL                                     | 6005A-T5  | -                      |
| 4      | -            | 1/ PANEL | BOTTOM RAIL/VERTICAL STILE                   | 6005A-T5  | -                      |
| 5      | -            | AS REQD. | STD. INTERLOCK                               | 6005A-T5  | -                      |
| 5A     | -            | AS REQD. | HEAVY INTERLOCK                              | 6005A-T5  | -                      |
| 6      | -            | AS REQD. | STD. ASTRAGAL STILE                          | 6005A-T5  | -                      |
| 6A     | -            | AS REQD. | HEAVY ASTRAGAL STILE                         | 6005A-T5  | -                      |
| 7      | -            | AS REQD. | GLASS STOP                                   | 6005A-T5  | -                      |
| 8      | -            | AS REQD. | SILL RISER                                   | 6005A-T5  | -                      |
| 9      | -            | AS REQD. | FIX. PANEL CLIPS AT 12" FROM TOP & BOTTOM    | 6005A-T5  | -                      |
| 10     | -            | AS REQD. | HEAD COVER                                   | 6063-T5   | -                      |
| 11     | -            | AS REQD. | SILL TRACK COVER                             | 6005A-T5  | -                      |
| 12     | -            | AS REQD. | SHORT JAMB COVER                             | 6005A-T5  | -                      |
| 13     | -            | AS REQD. | LONG JAMB COVER                              | 6005A-T5  | -                      |
| 14     | -            | AS REQD. | POCKET HOOK STRIP                            | 6005A-T5  | -                      |
| 15     | -            | AS REQD. | INTERLOCK REINFORCEMENT                      | 6005A-T5  | -                      |
| 16     | -            | 4/ PANEL | INTERIOR GLAZING GASKET                      | EPDM      | DUROMETER 70±5 SHORE A |
| 17     | -            | 4/ PANEL | EXTERIOR GLAZING GASKET                      | EPDM      | DUROMETER 70±5 SHORE A |
| 18     | -            | AS REQD. | PILE W'STRIPPING 5/16"H X 1/4"W (PANEL)      | WOOL      | -                      |
| 19     | -            | AS REQD. | PILE W'STRIPPING 3/16"H X 1/4"W (SILL RISER) | WOOL      | -                      |
| 20     | -            | AS REQD. | PILE W'STRIPPING 5/16"H X 1/4"W (INTERLOCK)  | WOOL      | -                      |
| 21     | -            | AS REQD. | PILE W'STRIPPING 3/16"H X 1/4"W (FRAME)      | WOOL      | -                      |
| 22     | -            | AS REQD. | PILE W'STRIPPING 3/16"H X 3/16"W (ASTRAGAL)  | WOOL      | -                      |
| 23     | -            | AS REQD. | FRAME SILL PILE PAD (3/4"W X 1"H X 3-1/8"L)  | WOOL      | -                      |
| 24     | -            | AS REQD. | MORTISE 2 POINT LOCK                         | ST. STEEL | -                      |
| 25     | -            | 2/ PANEL | ROLLER ASSEMBLY                              | ZAMAK     | -                      |
| 26     | -            | 4/ PANEL | CORNER KEY                                   | -         | -                      |
| 27     | #10 X 1/2"   | AS REQD. | FIX. PANEL CLIP FASTENERS                    | ST. STEEL | PH TEKS                |
| 28     | #10 X 1-1/4" | AS REQD. | INTERLOCK FASTENERS AT ? FROM ENDS & ?" O.C. | ST. STEEL | PH TEKS                |
| 29     | #10 X 2-1/2" | AS REQD. | ASTRAGAL FASTENERS AT ? FROM ENDS & ?" O.C.  | ST. STEEL | PH TEKS                |
| 30     | -            | 2/ LITE  | SETTING BLOCKS AT 1/4 POINTS                 | EPDM      | DUROMETER 80±5 SHORE A |
|        |              |          |                                              |           |                        |

SEALANT:

ALL JOINTS AND FRAME CONNECTIONS SEALED WITH WHITE/ALUMINUM COLORED SILICONE.

LOCKS:

SURFACE MOUNT METALLIC THREE PLY DUAL HOOK LOCK AT 38-3/4" FROM BOTTOM FASTENED TO LOCK STILE WITH (2) #8 X 1-1/4" FH SELF DRILLING SCREWS

SURFACE MOUNT METALLIC KEEPER FACING LOCK AT 39" FROM BOTTOM FASTENED WITH (2) #8 X 1-1/4" FH SMS



Sealed: 3/23/2026

FL #48120

afc

AL-FAROOQ CORPORATION  
ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100  
WWW.AFCENG.COM

COMP-ANL\26-05F-EWD

ALUMINUM & GLASS SLIDING GLASS DOOR (L.M.I.)


Eurotech Industries Inc.

4201 N.E. 12th Terrace  
Oakland Park, Florida 33334  
Tel. (954) 630-9967  
www.etiwindows.com


|            |    |      |    |             |
|------------|----|------|----|-------------|
| revisions: | no | date | by | description |
|            |    |      |    |             |
|            |    |      |    |             |
|            |    |      |    |             |
|            |    |      |    |             |

|                |                  |               |          |
|----------------|------------------|---------------|----------|
| date: 02-23-26 | scale: 3/8" = 1" | dr. by: TARIQ | chk. by: |
|----------------|------------------|---------------|----------|

|             |          |
|-------------|----------|
| drawing no. | 26-05F   |
| sheet       | 16 of 17 |

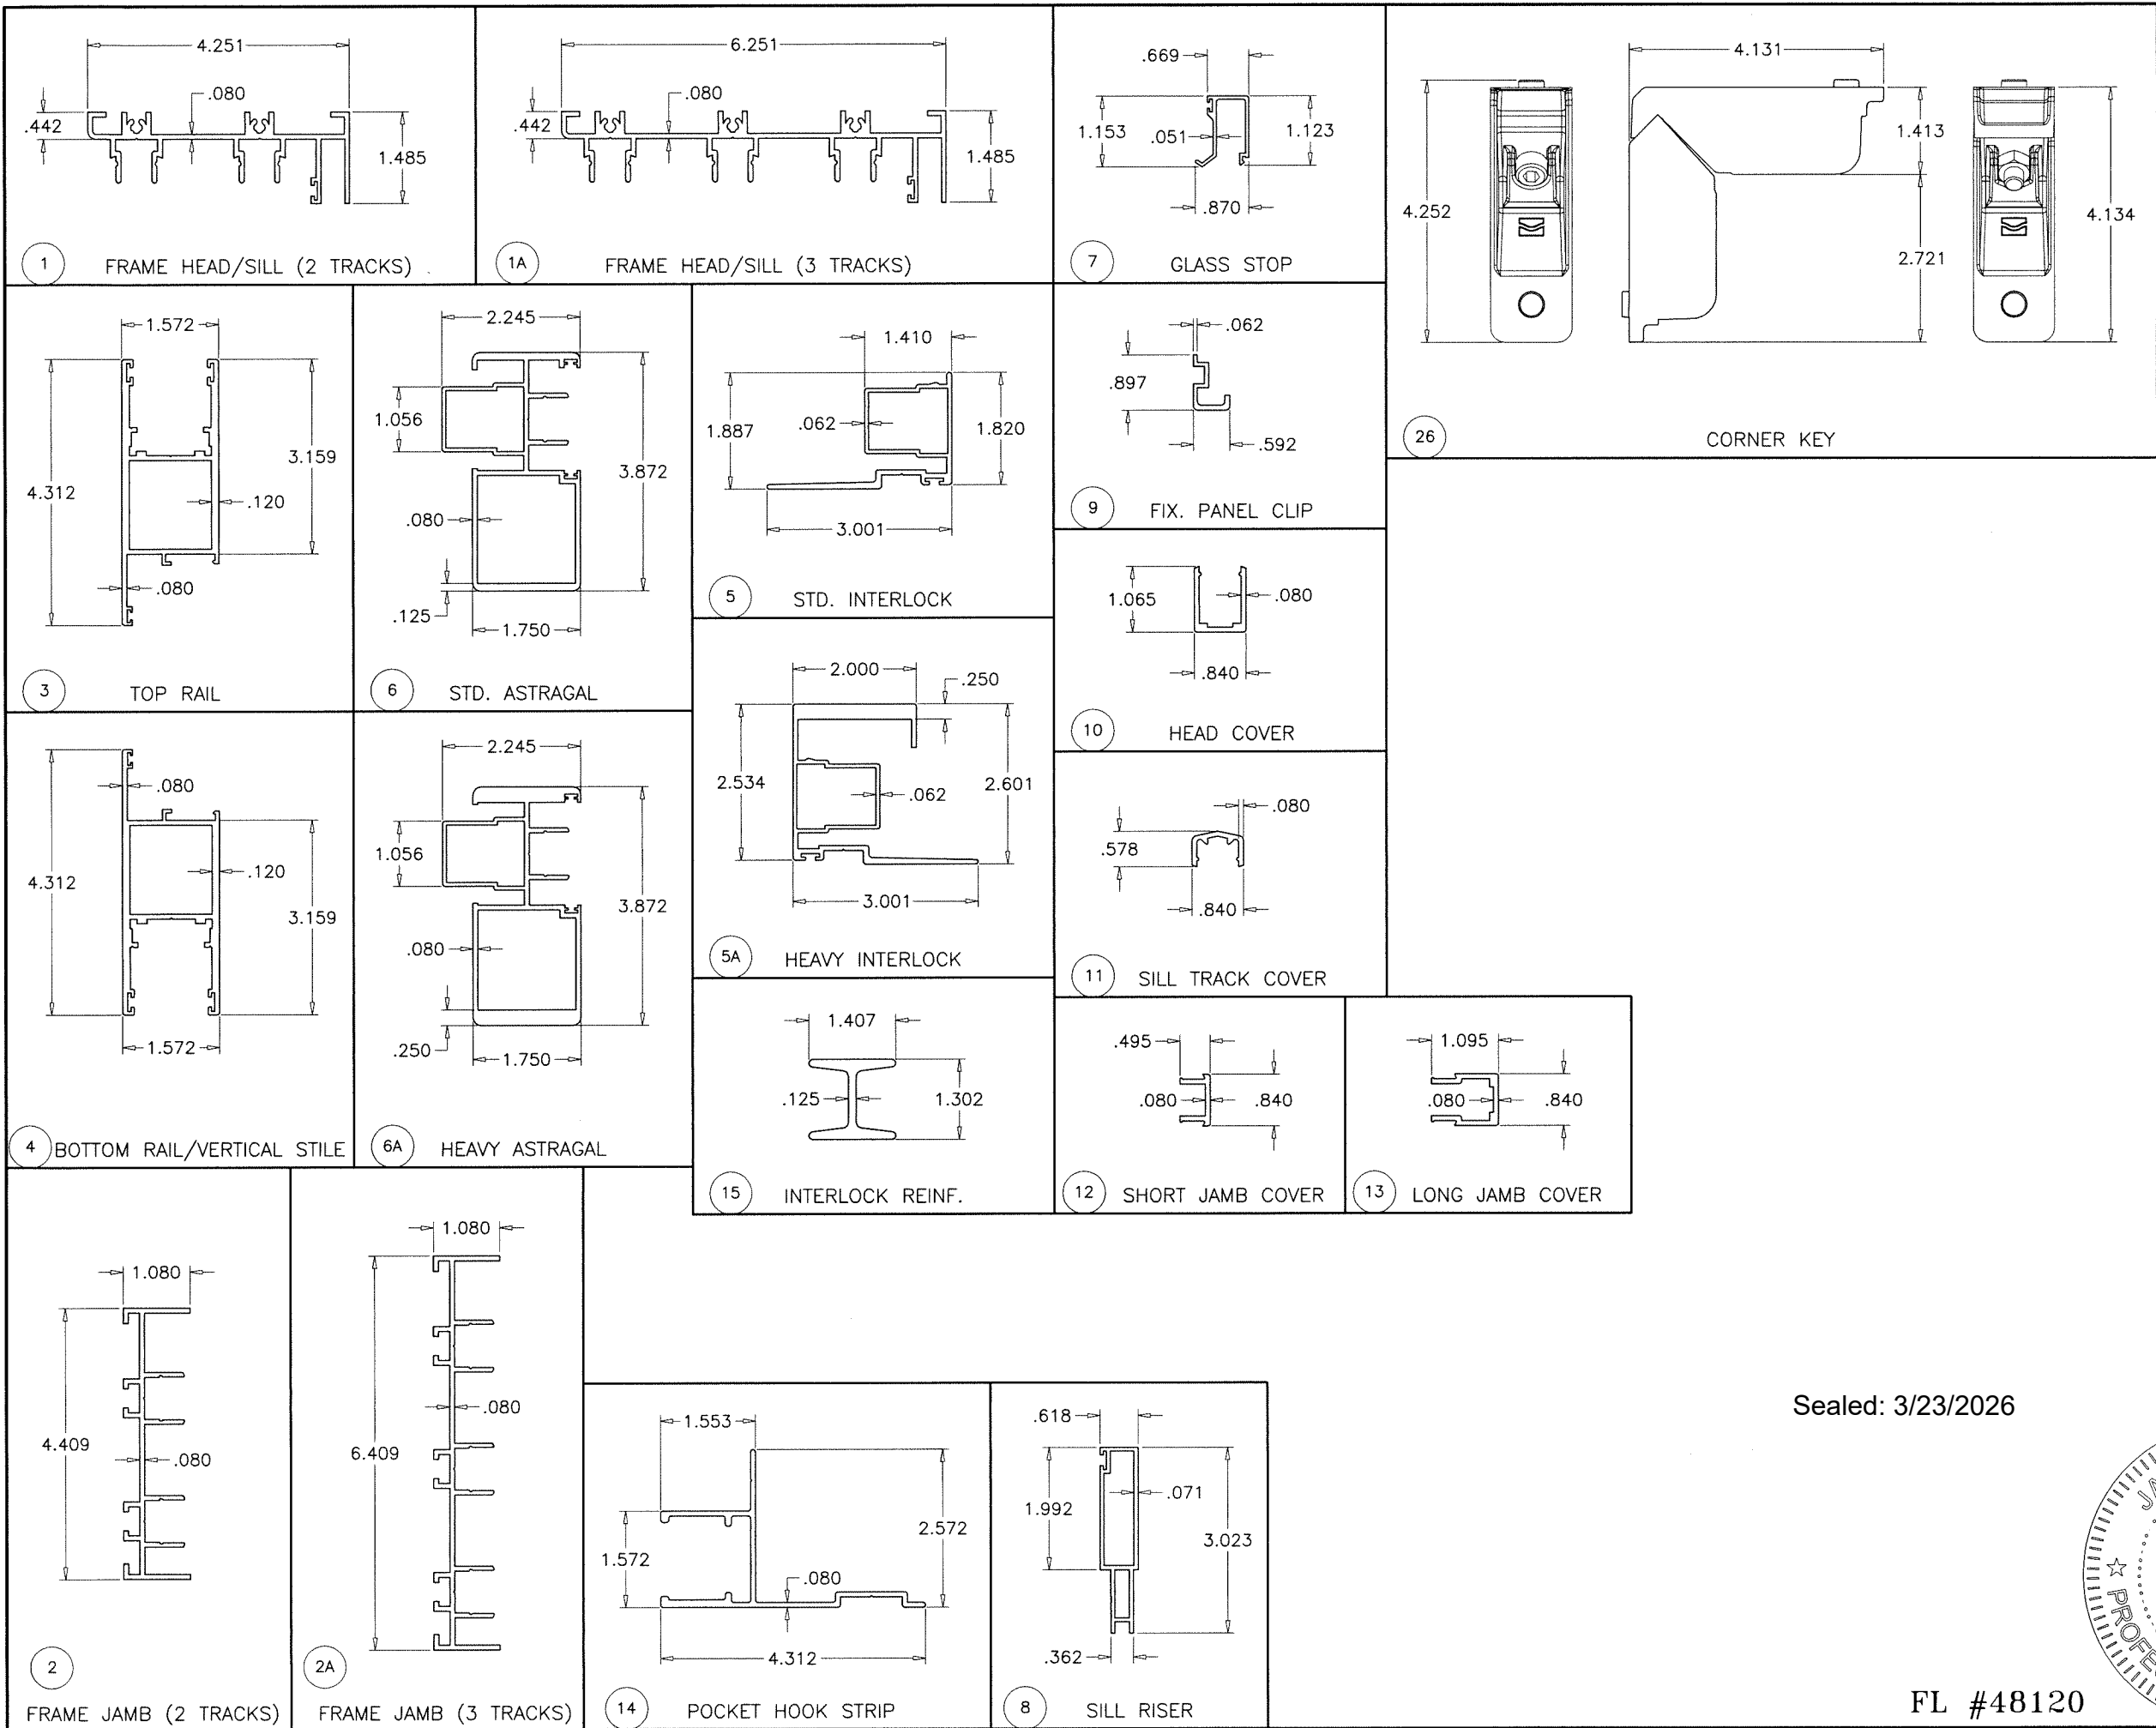

Sealed: 3/23/2026

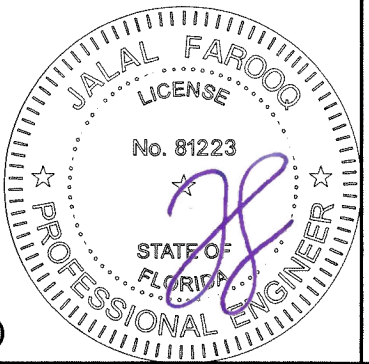

**AL-FAROOQ CORPORATION**  
ENGINEERS & PRODUCT DEVELOPMENT  
9360 SUNSET DRIVE, SUITE 220  
MIAMI, FLORIDA 33173  
TEL. (305) 264-8100  
WWW.AFCENG.COM  
FBPE #3538

**Eurotech Industries Inc.**  
4201 N.E. 12th Terrace  
Oakland Park, Florida 33334  
Tel. (954) 630-9967  
www.etiwindows.com

| Revisions: |                     |
|------------|---------------------|
| no         | date by description |
|            |                     |
|            |                     |
|            |                     |
|            |                     |
|            |                     |
|            |                     |
|            |                     |
|            |                     |
|            |                     |
|            |                     |

date: 02-23-26

scale: 3/8" = 1"

dr. by: TARIQ

chk. by:

drawing no.

**26-05F**

sheet 17 of 17

FL #48120