

NOTES

1. STANDARD GLAZING OPTION - .125" MINIMUM DSB GLAZING MEETS UNIFORM STATIC DESIGN PRESSURES SHOWN ON THIS DRAWING. GLAZING SHALL HAVE A MAXIMUM HEIGHT OF 6.70" AND A MAXIMUM LENGTH OF 24.00". GLAZING IS NOT IMPACT RESISTANT AND DOES NOT MEET THE REQUIREMENTS FOR WIND-BORNE DEBRIS REGIONS.

2. ALUMINUM FULL VIEW OPTION - ALUMINUM FULL VIEW SECTION MAY REPLACE ANY SECTION EXCEPT TOP AND BOTTOM PANELS. ALUMINUM FULL VIEW SECTION SHALL HAVE RAILS AND STILES OF EXTRUDED ALUMINUM ALLOY 6063-T6 WITH A 2-1/4" INTEGRAL FIN AND .125" MINIMUM DSB GLAZING INSTALLED WITH ALUMINUM RETAINERS IN ORDER TO MEET UNIFORM STATIC DESIGN PRESSURES SHOWN ON THIS DRAWING. AFV GLAZING PANEL SIZE IS 46.5"x21.9" (MAX). GLAZING IS NOT IMPACT RESISTANT AND DOES NOT MEET THE REQUIREMENTS FOR WIND-BORNE DEBRIS REGIONS.

3. MINIMUM OF 1" OVERLAP ON BOTH JAMBS REQUIRED TO MEET NEGATIVE DESIGN PRESSURES.

4. SLIDE LOCKS REQUIRED.

5. SECTION STEEL TO HAVE THE FOLLOWING MINIMUM THICKNESS:
401, 402 - 20 GA
403, 404 - 24 GA
405, 406 - 25 GA

6. THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.

7. TRACK CLIPS SHALL BE LOCATED WITH CENTERLINE OF BOTTOM CLIP SPACED 10" MAX FROM BOTTOM OF TRACK AND REMAINING TRACK CLIPS SPACED AT 24" O.C. MAX. SPACING BETWEEN TOP TRACK CLIP AND SPLICE PLATE SHALL BE 30" O.C. MAX.

8. WHEN MOUNTING TO WOOD, DOOR JAMB TO BE MINIMUM 2x6 STRUCTURAL GRADE LUMBER. REFER TO JAMB CONNECTION SUPPLEMENT FOR ATTACHMENT TO SUPPORTING STRUCTURE.

SUPERIMPOSED DESIGN PRESSURE LOADS ON SUPPORTING STRUCTURE

MAX DOOR WIDTH	DOOR HEIGHT	MAX UNIFORM LOAD EACH JAMB (PLF)
12'-2"	ALL	+127.1/-143.6

STATIC PRESSURE RATINGS	APPROVED SIZES
DESIGN PRESSURE(PSF): +20.9/-23.6	MAX WIDTH: 12'-2"
	MAX HEIGHT: 24'-1"
IMPACT/CYCLIC RATED: NO	MAX SECTION HEIGHT: 24'

13 GA HORIZ ANGLE

15 GA MIN HORIZ TRACK

13 GA CONTINUOUS WALL ANGLE


15 GA MIN VERT TRACK

5/16"x1-5/8" LAG SCREW AT EACH HOLE LOCATION FOR WOOD SUBSTRATE. SEE SHEET 3 FOR MOUNTING TO OTHER SUBSTRATES.

1/4-20x9/16" TRACK BOLT AND 1/4-20 HEX NUT AT EACH TRACK CLIP LOCATION (SEE DETAIL A SHEET 2)

11 GA TRACK CLIPS (WELDED, BOLTED, OR RIVETED TO WALL ANGLE) SEE NOTE 7 AND DETAIL F SHEET 2

SLIDE LOCK BOTH ENDS

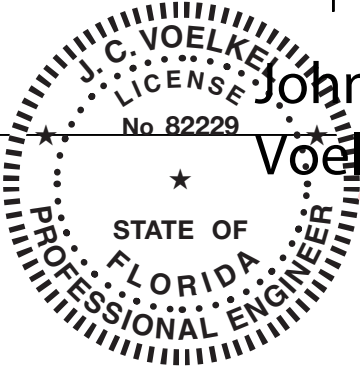


J. CHRISTIAN VOELKEL, PE
407 Navarre Street
Gulf Breeze, FL 32561
FL PE 82229
TX PE 133174

NOTE: (4) SECTION SOLID DOOR SHOWN. SEE SHEET 2 FOR U-BAR LOCATIONS ON DOORS WITH OTHER SECTION QUANTITIES AND SEE NOTES 1 & 2 THIS SHEET FOR GLAZING OPTIONS.

Digitally signed
by John Voelkel
Date: 2026.07.10
15:49:04 -05'00'


COMPLIES WITH THE REQUIREMENTS OF IBC/IRC 2024.
COMPLIES WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE.

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.										
		THIRD ANGLE PROJECTION	TOLERANCES UNLESS OTHERWISE SPECIFIED		FINISH	The Genuine. The Original.	NAME	DATE	DRAWING TITLE:	
			HOLE DIAMETER	WHOLE NUMBERS:	N/A		LEWISVILLE, TEXAS	1/29/2026	WINDLOAD, OPTION CODE 2024 SERIES 401/402/403/404/405/406, 20.9/-23.6 PSF, 12'-2" MAX	
	UNDER .251 +.004/--.003		± .25							
	.251 TO .500 +.006/--.003		.X ± .1							
	OVER .500 +.008/--.003		.XX ± .03							
	FRACTIONS		.XXX ± .010							
	ASME Y14.100 AND Y14.5 APPLY, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN U.S. CUSTOMARY UNITS.	ANGLES: ± .5°	UNIT OF MEASURE		MATERIAL:	CHECKED BY:	DRAWING NUMBER			
REF DWG	USED ON		± 1/16	EA	N/A	APPROVED BY:	-	-	D-413157	
									SCALE: N/A	SHEET 1 OF 3








- (2) 1/4-14x7/8" SELF DRILLING CRIMPTITE SCREWS
- HALF HINGE
- (2) 1/4 x 1/2" CARRIAGE BOLTS AND 1/4" FLANGE NUTS

ATTACH U-BARS WITH
(2) 1/4-14x7/8" SELF
DRILLING CRIMPTITE SCREWS
AT ALL STILE LOCATIONS. TYP.




(2) SECTION DOORS WITH
(2) 3" 20 GA 80 KSI U-BARS
LOCATED AS SHOWN

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.									
		THIRD ANGLE PROJECTION 	TOLERANCES UNLESS OTHERWISE SPECIFIED	FINISH N/A	The Genuine. The Original.  LEVISTVILLE, TEXAS	NAME S WOLFF	DATE 1/29/2026	DRAWING TITLE: WINDLOAD, OPTION CODE 2024 SERIES 401/402/403/404/405/406, 209/-23.6 PSF, 12'-2" MAX	
		APPLY Y14.100 AND Y14.5 SPECIFIED DIMENSIONS ARE IN U.S. CUSTOMARY UNITS.	HOLE DIAMETER UNDER .251 +.004/--.003 .251 TO .500 +.006/--.003 OVER .500 +.008/--.003	WHOLE NUMBERS: ± .25 .X ± .03 .XX ± .03 .XXX ± .010 ANGLES: ± .5°	UNIT OF MEASURE EA	CHECKED BY: T CLARK	-	DRAWING NUMBER D-413157	
REF DWG	USED ON		FRACTIONS ± 1/16		N/A	APPROVED BY:	-	SCALE: N/A SHEET 2 OF 3	



SEAL ON PAGE 1

J. CHRISTIAN VOELKEL, PE
407 Navarre Street
Gulf Breeze, FL 32561
FL PE 82229
TX PE 133174

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.											
		 ASME Y14.100 AND Y14.5 APPLY, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN U.S. CUSTOMARY UNITS.	TOLERANCES UNLESS OTHERWISE SPECIFIED		FINISH	The Genuine. The Original.	 LEWISVILLE, TEXAS	NAME	DATE	DRAWING TITLE:	
			WHOLE DIAMETER	WHOLE NUMBERS:	N/A	UNIT OF MEASURE		MATERIAL:	DRAWN BY:	1/29/2026	WINDLOAD, OPTION CODE 2024 SERIES 401/402/403/404/405/406, 20.9"-23.6 PSF, 12'-2" MAX
			UNDER .251 +.004/--.003 .251 TO .500 +.006/--.003 OVER .500 +.008/--.003	.X ± .1 .XX ± .03 .XXX ± .010 ANGLES: ± 5°					CHECKED BY:	-	DRAWING NUMBER
REF DWG	USED ON		FRACTIONS ± 1/16		EA	N/A	APPROVED BY:	-		D-413157	
									SCALE: N/A	SHEET 3 OF 3	