

1. STANDARD GLAZING OPTION - .125"
MINIMUM DSB GLAZING MEETS UNIFORM STATIC
DESIGN PRESSURES SHOWN ON THIS DRAWING.
GLAZING SHALL HAVE A MAXIMUM HEIGHT OF
6.70" AND A MAXIMUM LENGTH OF 24.00".
GLAZING IS NOT IMPACT RESISTANT AND DOES
NOT MEET THE REQUIREMENTS FOR
WIND-BORNE DEBRIS REGIONS.

2. ALUMINUM FULL VIEW OPTION – ALUMINUM FULL VIEW SECTION MAY REPLACE ANY SECTION EXCEPT TOP AND BOTTOM PANELS. ALUMINUM FULL VIEW SECTION SHALL HAVE RAILS AND STILES OF EXTRUDED ALUMINUM ALLOY 6063-T6 AND .125" MINIMUM DSB GLAZING INSTALLED WITH ALUMINUM RETAINERS IN ORDER TO MEET UNIFORM STATIC DESIGN PRESSURES SHOWN ON THIS DRAWING. AFV PANEL SIZE IS 51.5"x21.9" (MAX). GLAZING IS NOT IMPACT RESISTANT AND DOES NOT MEET THE REQUIREMENTS FOR WIND-BORNE DEBRIS REGIONS.

3. MINIMUM OF 1" OVERLAP ON BOTH JAMBS
REQUIRED TO MEET NEGATIVE DESIGN
PRESSURES.

4. SLIDE LOCKS REQUIRED.

5. SECTION STEEL TO HAVE THE FOLLOWING
MINIMUM THICKNESS:

401, 402 - 20 GA

403, 404 - 24 GA

405, 406 - 25 GA

6. THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.

7. TRACK CLIPS SHALL BE LOCATED WITH CENTERLINE OF BOTTOM CLIP SPACED 10" MAX FROM BOTTOM OF TRACK AND REMAINING TRACK CLIPS SPACED AT 24" O.C. MAX. SPACING BETWEEN TOP TRACK CLIP AND SPLICE PLATE SHALL BE 30" O.C. MAX.

8. WHEN MOUNTING TO WOOD, DOOR JAMB TO BE MINIMUM 2x6 STRUCTURAL GRADE LUMBER. REFER TO JAMB CONNECTION SUPPLEMENT FOR ATTACHMENT TO SUPPORTING STRUCTURE.

13 GA HORIZ ANGLE

15 GA MIN HORIZ
TRACK

13 GA CONTINUOUS
WALL ANGLE

15 GA MIN VERT
TRACK

5/16"x1-5/8"
LAG SCREW AT EACH
HOLE LOCATION FOR
WOOD SUBSTRATE. SEE
SHEET 3 FOR MOUNTING
TO OTHER SUBSTRATES.

1/4-20x9/16" TRACK
BOLTS AND 1/4-20 HEX
NUT AT EACH TRACK
CLIP LOCATION
(SEE DETAIL A SHEET 2)

11 GA TRACK CLIPS
(WELDED, BOLTED, OR
RIVETED TO WALL
ANGLE) SEE NOTE 7 AND
DETAIL F SHEET 2
SLIDE LOCK BOTH ENDS

SUPERIMPOSED DESIGN PRESSURE
LOADS ON SUPPORTING STRUCTURE

MAX DOOR WIDTH	DOOR HEIGHT	MAX UNIFORM LOAD EACH JAMB (PLF)
9'-4"	ALL	+53.1/-59.1

STATIC PRESSURE RATINGS	APPROVED SIZES
DESIGN PRESSURE(PSF): +11.4/−12.7	MAX WIDTH: 9'−4"
	MAX HEIGHT: 24'−1"
IMPACT/CYCLIC RATED: NO	MAX SECTION HEIGHT: 24"

NOTE: (4) SECTION SOLID DOOR SHOWN. SEE SHEET 2 FOR U-BAR LOCATIONS ON DOORS WITH OTHER SECTION QUANTITIES AND SEE NOTES 1 & 2 THIS SHEET FOR GLAZING OPTIONS.


Digitally signed
by John Voelkel
Date: 2026.07.10
15:33:52 -05'00'

COMPLIES WITH THE REQUIREMENTS OF IBC/IRC 2024.
COMPLIES WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE.

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.

[illegible]

REVISIONS				
ER	REV	DESCRIPTION	DATE	APPROVAL
WL020	-	INITIAL DRAWING	1/29/26	SW
WL020	A	ADDED FBC NOTE	6/30/26	TC

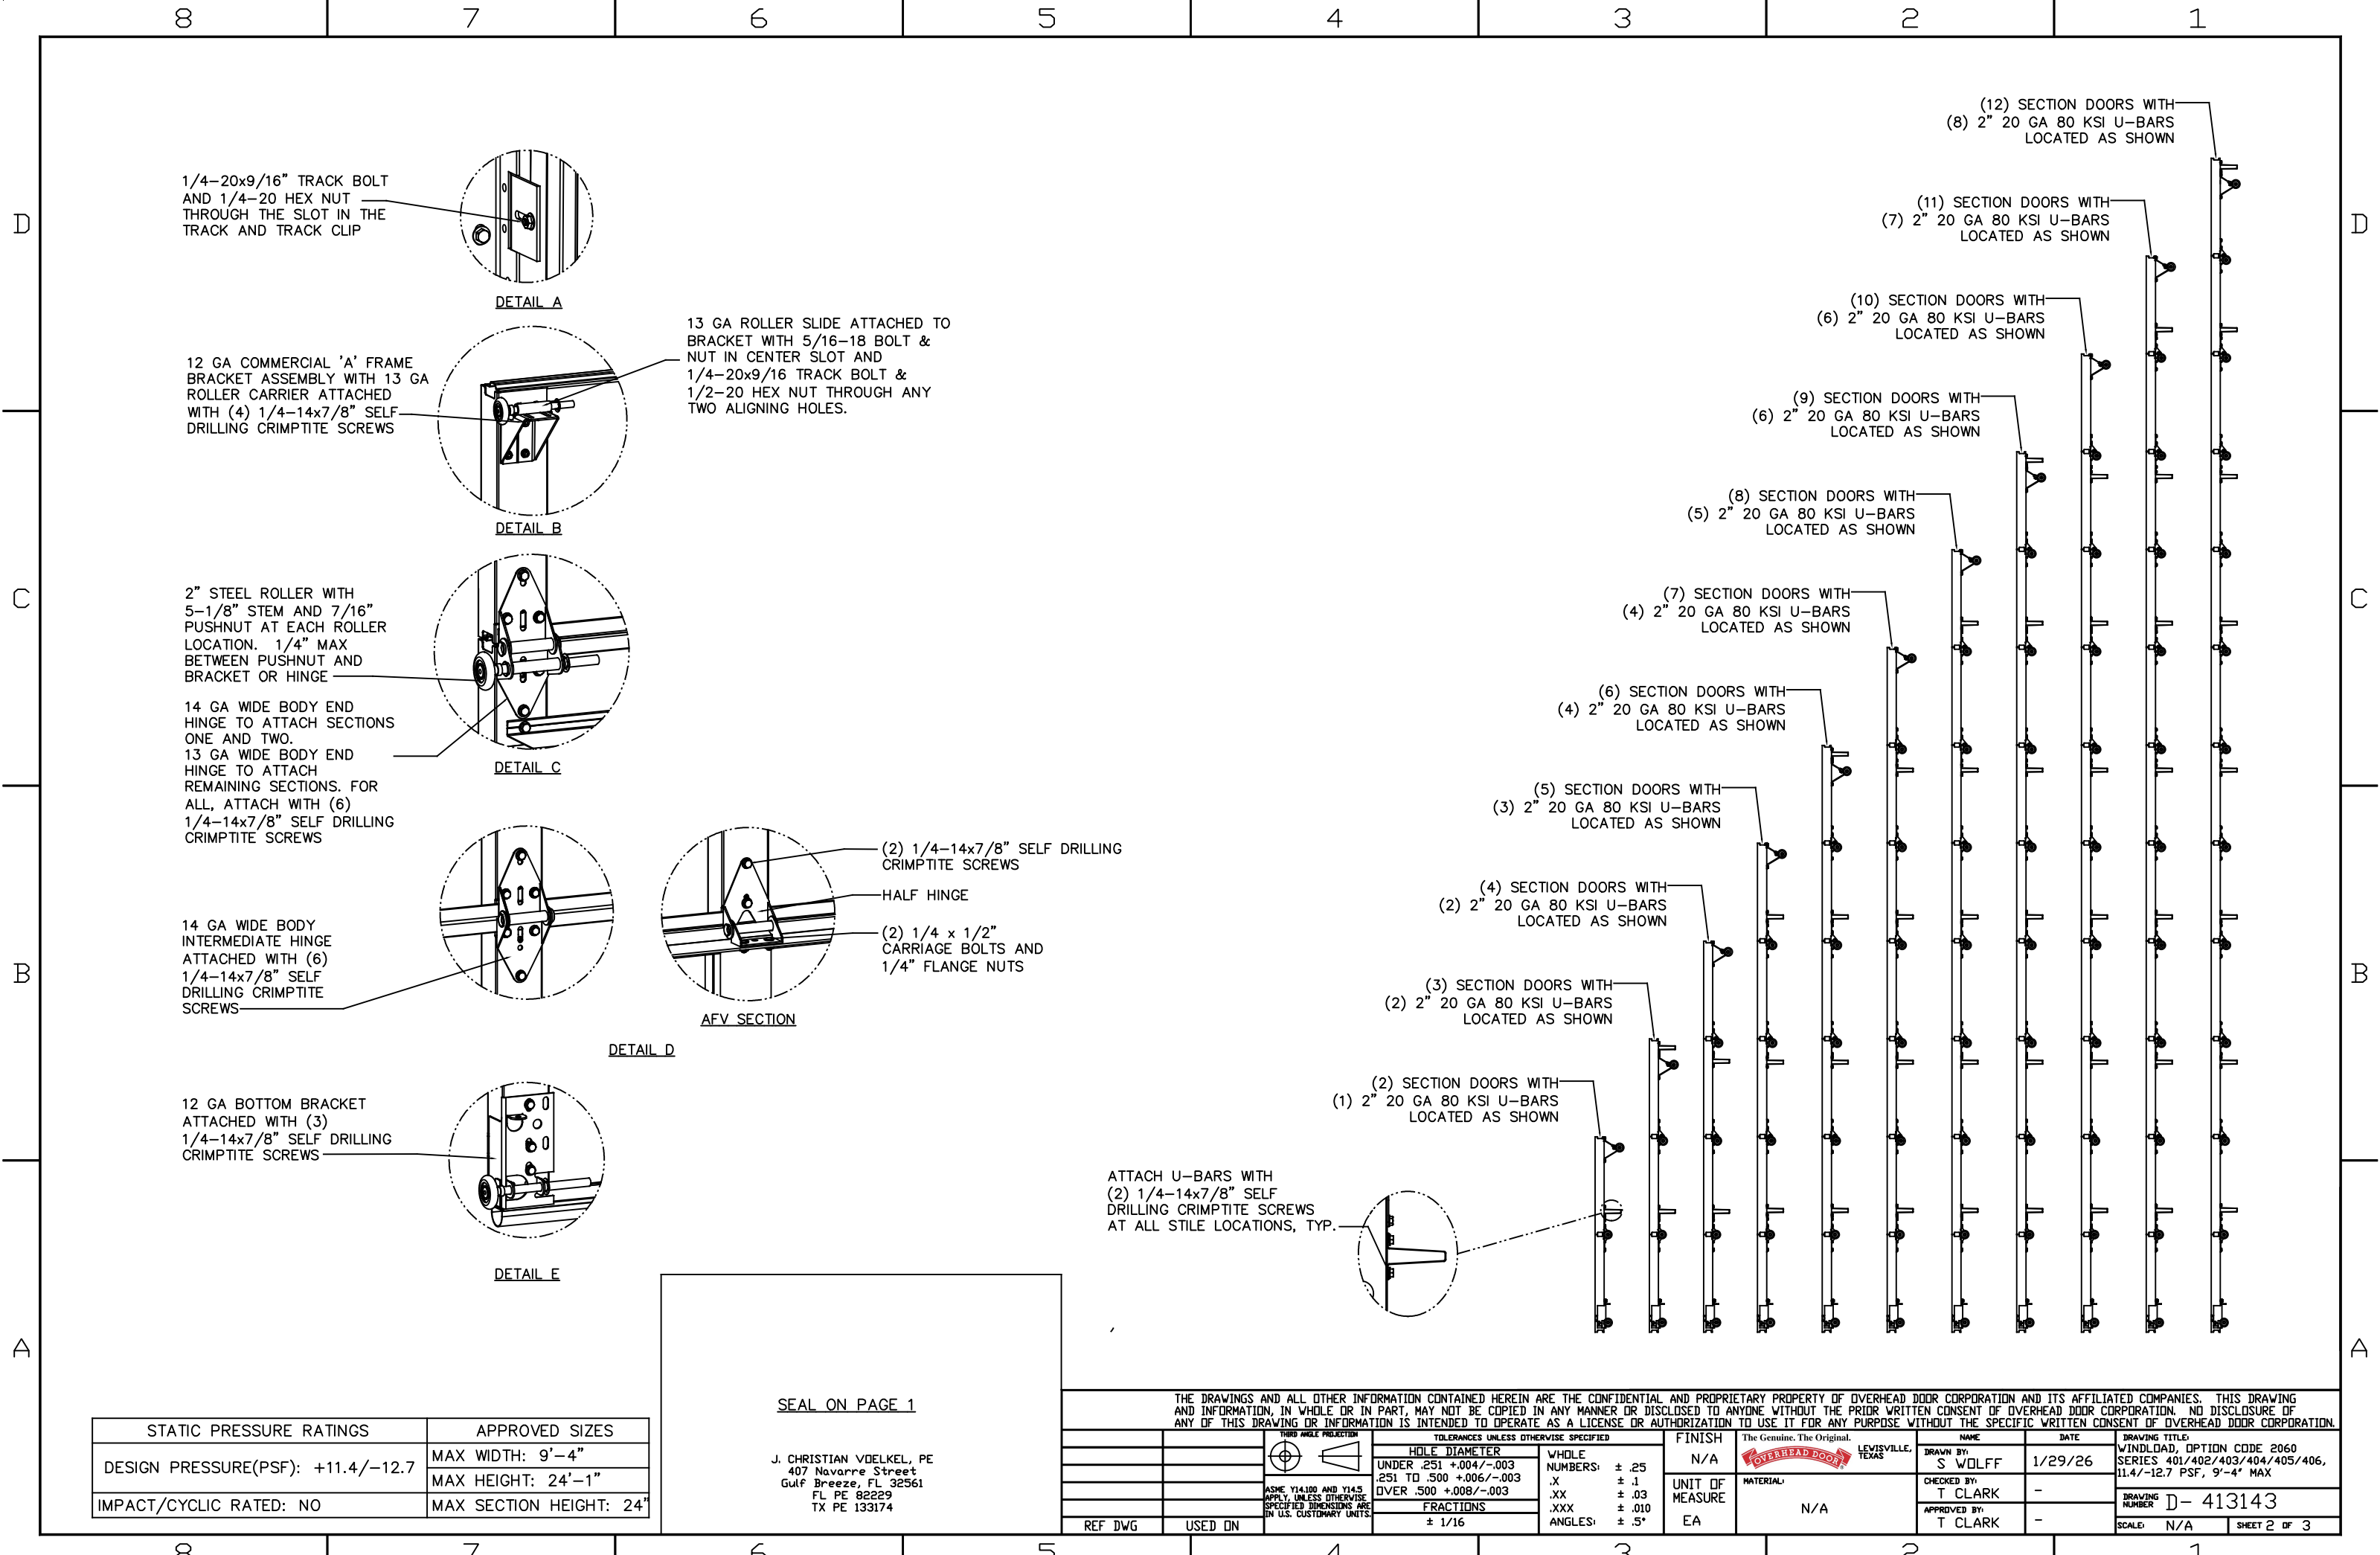

STATIC PRESSURE RATINGS	APPROVED SIZES
DESIGN PRESSURE(PSF): +11.4/-12.7	MAX WIDTH: 9'-4"
	MAX HEIGHT: 24'-1"
IMPACT/CYCLIC RATED: NO	MAX SECTION HEIGHT: 24"

SEAL ON PAGE 1

J. CHRISTIAN VDEKEL, PE
407 Navarre Street
Gulf Breeze, FL 32561
FL PE 82229
TX PE 133174

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.									
REF DWG	USED ON		TOLERANCES UNLESS OTHERWISE SPECIFIED		FINISH N/A	UNIT OF MEASURE EA	MATERIAL N/A	NAME S WOLFF	DATE 1/29/26
			HOLE DIAMETER	WHOLE NUMBERS: ± .25					
			UNDER .251 +.004/- .003	.X ± .1					
			.251 TO .500 +.006/- .003	.XX ± .03				CHECKED BY: T CLARK	
			OVER .500 +.008/- .003	.XXX ± .10				APPROVED BY: T CLARK	
			FRACTIONS	ANGLES: ± .5°					
			± 1/16						
			ASME Y14.100 AND Y14.5 APPLY, UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN U.S. CUSTOMARY UNITS.		DRAWING TITLE: WINDLOAD, OPTION CODE 2060 SERIES 401/402/403/404/405/406, 11.4/-12.7 PSF, 9'-4" MAX DRAWING NUMBER D- 413143 SCALE: N/A SHEET 2 OF 3				

D

C

B


A

D


C

B



A

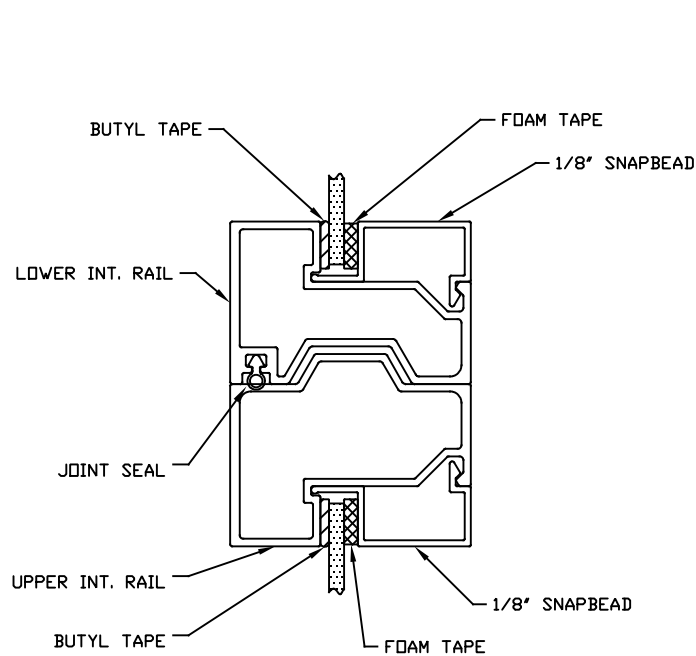


ALUMINUM FULL VIEW
1/8" GLAZING OPTION

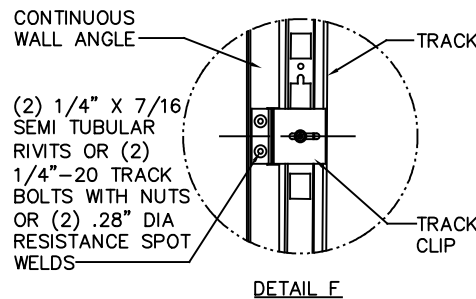


DETAIL F

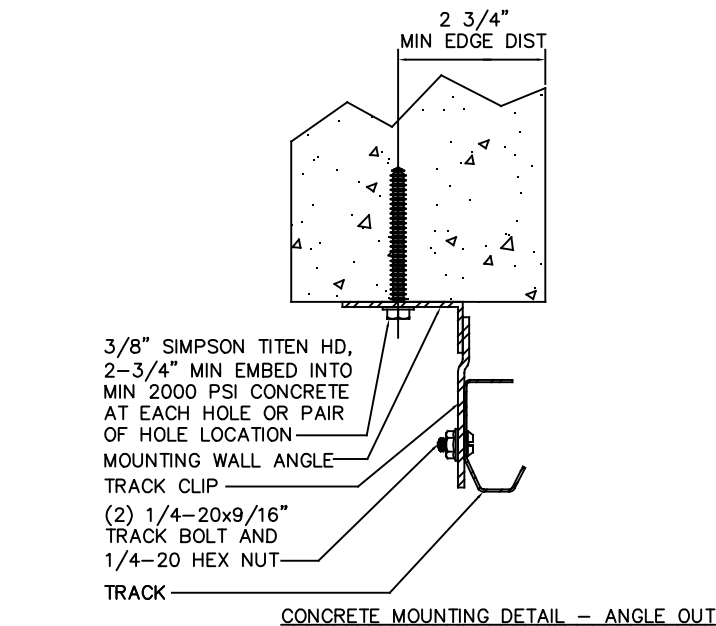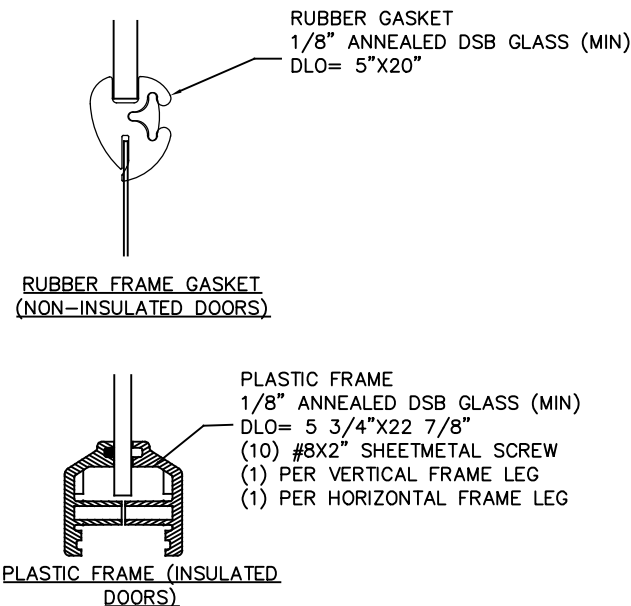

CONCRETE MOUNTING DETAIL - ANGLE OUT

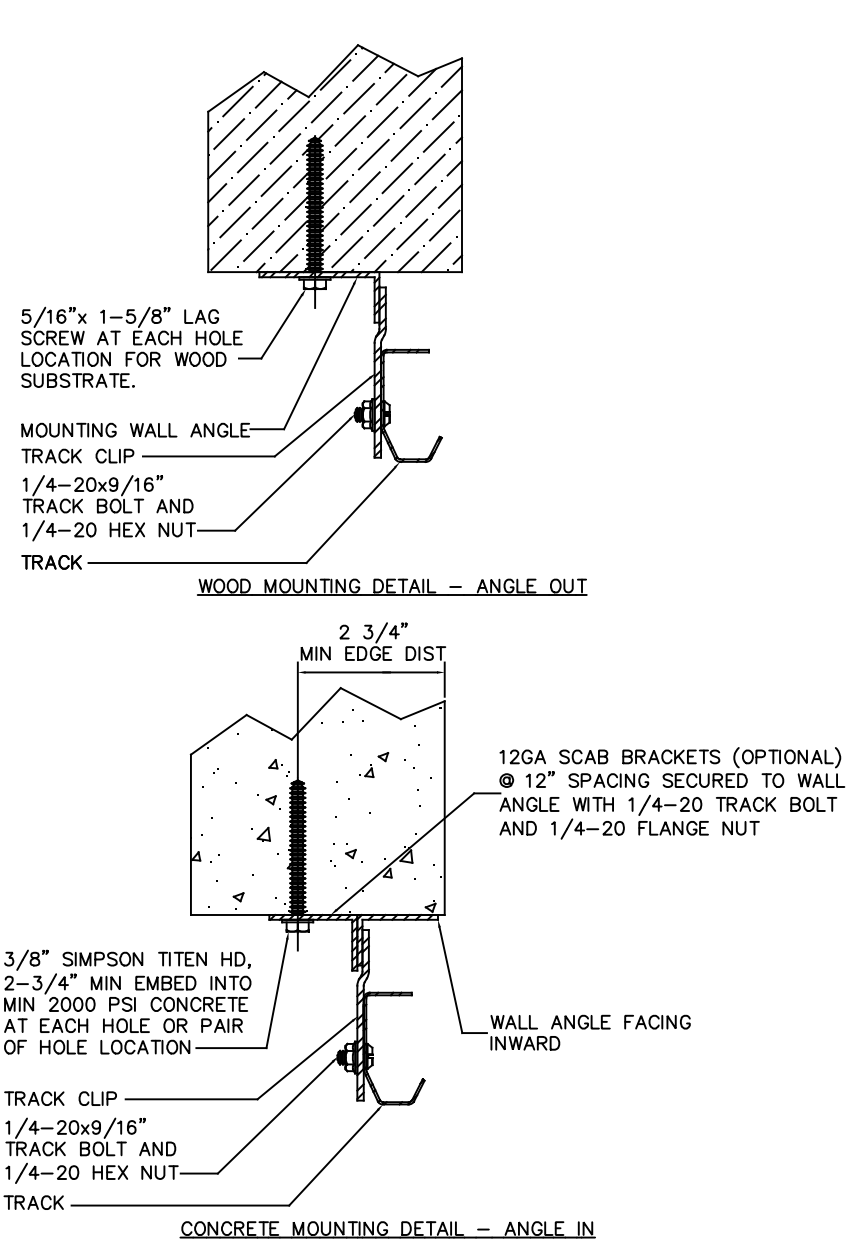

CONCRETE MOUNTING DETAIL - ANGLE IN

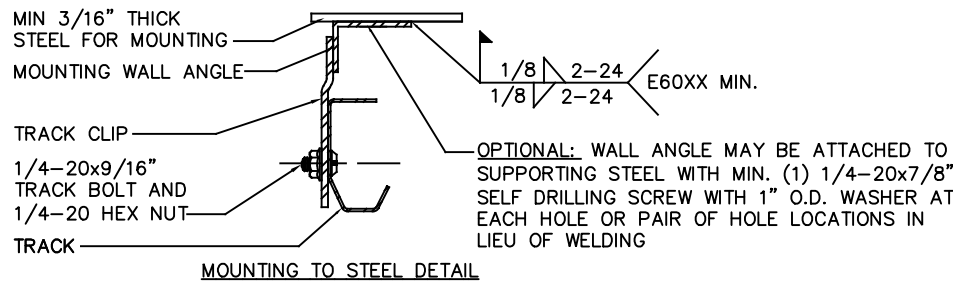

MOUNTING TO STEEL DETAIL

STATIC PRESSURE RATINGS	APPROVED SIZES
DESIGN PRESSURE(PSF): +11.4/-12.7	MAX WIDTH: 9'-4"
	MAX HEIGHT: 24'-1"
IMPACT/CYCLIC RATED: NO	MAX SECTION HEIGHT: 24'

SEAL ON PAGE 1

J. CHRISTIAN VDEKEL, PE
407 Navarre Street
Gulf Breeze, FL 32561
FL PE 82229
TX PE 133174

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION AND ITS AFFILIATED COMPANIES. THIS DRAWING AND INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT THE PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. NO DISCLOSURE OF ANY OF THIS DRAWING OR INFORMATION IS INTENDED TO OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT THE SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		FINISH		The Genuine. The Original.		NAME		DATE	
HOLE DIAMETER		N/A		OVERHEAD DOOR		LEWISVILLE, TEXAS		1/29/26	
UNDER .251 +.004/--.003		WHOLE NUMBERS: ± .25		UNIT OF MEASURE		DRAWN BY: S WOLFF		DRAWING TITLE: WINDLOAD, OPTION CODE 2060	
.251 TO .500 +.006/--.003		.X ± .1		MATERIAL: N/A		CHECKED BY: T CLARK		SERIES 401/402/403/404/405/406, 11.4/-12.7 PSF, 9'-4" MAX	
OVER .500 +.008/--.003		.XX ± .03				APPROVED BY: T CLARK		DRAWING NUMBER D- 413143	
FRACTIONS ± 1/16		.XXX ± .010						SCALE: N/A	
ANGLES: ± .5°		EA						SHEET 3 OF 3	
REF DWG	USED ON								