





MODELS	27 GA SHORT	27 GA FLUSH	27 GA LONG
CLOPAY	2050, 4050	2051, 4051	2053, 4053
HOLMES	62, 62G, 62LG, 6130	65, 65G, 6131	64, 64G, 6133
IDEAL	135, SDP38	136, SFL38	134, SRP38

NOTE: MAXIMUM SECTION HEIGHT IS 21"

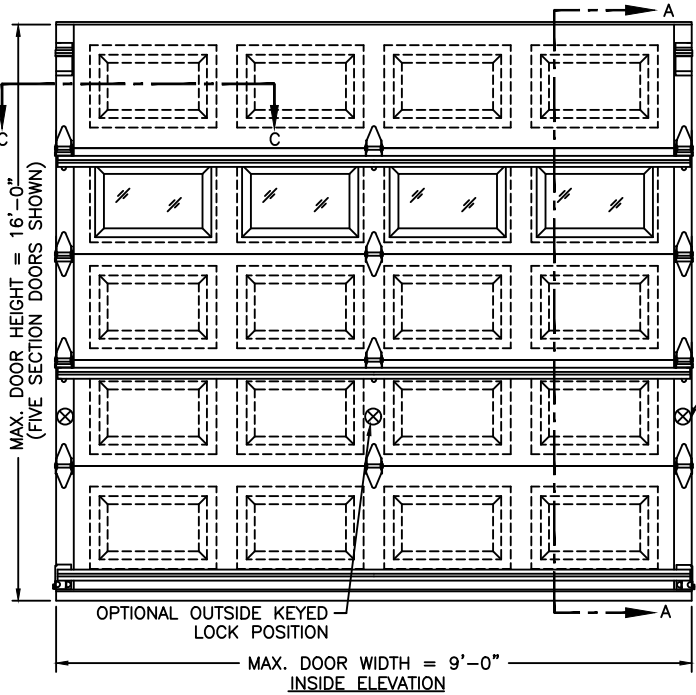

SHORT PANEL SHOWN


NOTE: TRACK CONFIGURATION ABOVE THE DOOR OPENING DOES NOT AFFECT THE WIND LOAD RATING OF THIS DOOR.

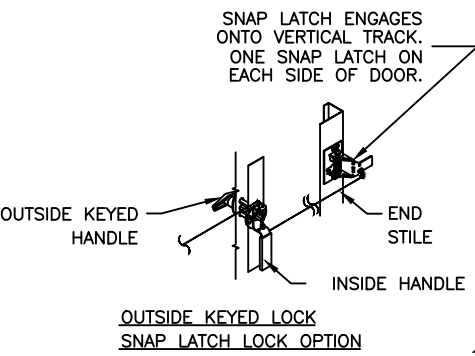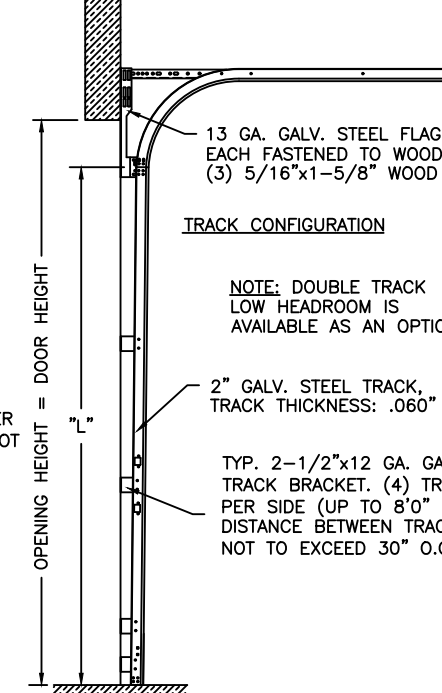

TWO POINT LOCKING INTO TRACK

27 GA. STEEL MIN. EXTERIOR SKIN WITH G-40 GALVANIZING, BAKED-ON PRIMER AND A BAKED-ON POLYESTER PAINTED TOP COAT.

THE OPTIONAL GLAZING SHOWN ON THIS DRAWING MEETS THE WIND LOAD REQUIREMENTS OF THE FLORIDA BUILDING CODE OR INTERNATIONAL BUILDING CODE BUT DOES NOT MEET THE IMPACT RESISTANT REQUIREMENT FOR WINDBORNE DEBRIS REGIONS (REFER TO CHAPTER 16 FBC / IBC).

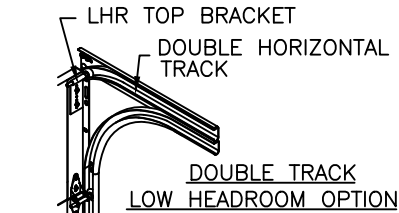


HORIZONTAL TRACK SUPPORT BY DOOR INSTALLER (TO SUIT)

TONGUE AND GROOVE JOINTS.

1-3/8" THICK

13 GA. GALV. STEEL BOTTOM BRACKET. ATTACHED WITH (2) #14X5/8" SHEET METAL SCREWS.

SECTION B-B
10 SCREW WINDOW LITE
FRONT FRAME WITH U.V. COATING ON OUTSIDE SURFACE.

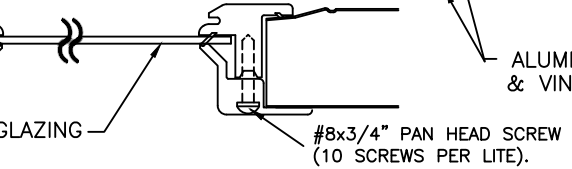

DOOR HEIGHT	"L"
6'-6"	70"
7'-0"	76"
7'-6"	82"
8'-0"	88"
8'-6"	94"
9'-0"	100"
9'-6"	106"
10'-0"	112"
10'-6"	118"
11'-0"	124"
11'-6"	130"
12'-0"	136"

NOTE: THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.

Jim Wheeler
Digitally signed by Jim Wheeler
Date: 2026.08.19 09:30:04 -04'00'

DESIGN LOADS: +20 P.S.F. & -21 P.S.F.
TEST LOADS: +30 P.S.F. & -31.5 P.S.F.



CLOPAY CORPORATION
8585 DUKE BLVD.
MASON, OH 45040
(513) 770-4800

Clopay Corporation All Rights Reserved.

MANUFACTURING PRODUCT CODE: MPC: DSIE-1A171
DATE: 7/17/96
DRAWN BY: MWW
CHECKED BY:

PLOT: N/A	MAX. SIZE: 9'0" x 16'0"
DESCRIPTION: 1-3/8 EPS: +20/-21 PSF DES. LOAD	
DRAWING NUMBER: B	VER: IBC

FLORIDA PRODUCT APPROVAL 48386.1