

CLOPAY 3717W5, 3718W5 (1.75"); 3720W5 3722W5, 3724W5 (2"); 3730W5 (3")
EX3717W5, EX3718W5 (1.75"); EX3720W5, EX3722W5, EX3724W5 (2")
CORNELL EX3717LW5, EX3718LW5 (1.75"); EX3720LW5, EX3722LW5, EX3724LW5 (2")
COOKSON EX3717NW5, EX3718NW5 (1.75"); EX3720NW5, EX3722NW5, EX3724NW5 (2")
HOLMES 240UW5, 244UW5 (2")
IDEAL C7X17W5, C7X18W5 (1.75"); C7X20W5, C7X22W5, C7X24W5 (2")


14'-2" WIDE (MAX) X 18'-0" HIGH (MAX)

HORIZONTAL TRACK END HANGER BRACKET
(SUPPLIED BY DOOR INSTALLER) CLOSES
ROLLER CHANNEL. INTERMEDIATE HANGER
REQUIRED FOR DOORS 12'-0" AND HIGHER

NOTE: DOUBLE TRACK LOW
HEADROOM, HI-LIFT TRACK,
FOLLOW-THE-ROOF TRACK,
AND VERTICAL LIFT TRACK
ARE AVAILABLE OPTIONS.


DOOR HEIGHT 'A'	NUMBER OF SECTIONS
UP TO 8'-0"	4
8'-3" THRU 10'-0"	5
10'-3" THRU 12'-0"	6
12'-3" THRU 14'-0"	7
14'-3" THRU 16'-0"	8
16'-3" THRU 18'-0"	9

THE OPTIONAL GLAZING SHOWN ON THIS DRAWING MEETS THE
WIND LOAD REQUIREMENTS OF THE FLORIDA BUILDING CODE
OR INTERNATIONAL BUILDING CODE BUT DOES NOT MEET THE
IMPACT RESISTANT REQUIREMENT FOR WINDBORNE DEBRIS
REGIONS (REF. CHAPTER 16 FBC/IBC)




OPTIONAL ALUMINUM FULL VISION WINDOW LITE SECTIONS AVAILABLE (1/8" DSB,
1/8" ACRYLIC, 1/4" WIRE, 1/2" INSUL.). FULL VISION SECTIONS TO HAVE SAME
REINFORCEMENT AS OTHER SECTIONS. OPTIONAL ACRYLIC IS PLASKOLITE OPTIX,
AN APPROVED CG2 PLASTIC IN COMPLIANCE WITH IBC/FBC 2606.


OPTIONAL 24 X 8 DSB OR INSULATED
WINDOW LITES AVAILABLE

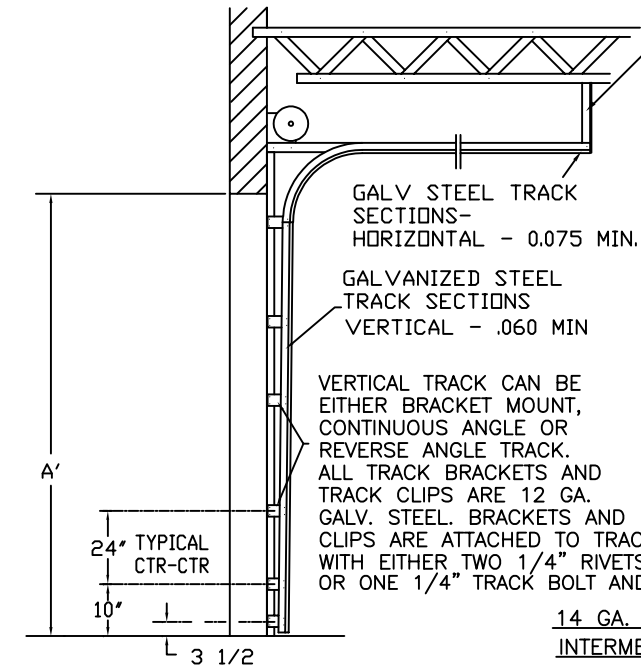


SIDE ELEVATION
STANDARD-LIFT TRACK DETAILS

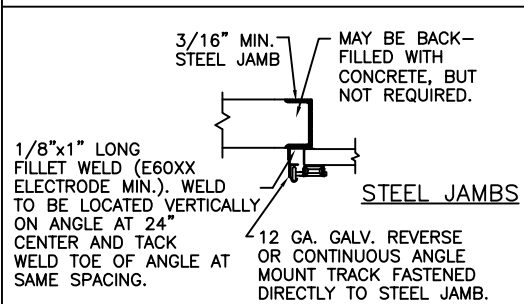


WOOD JAMB ON CONCRETE

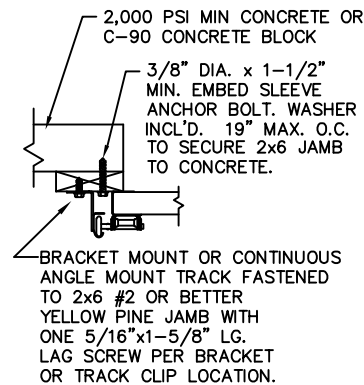


CONCRETE JAMBS

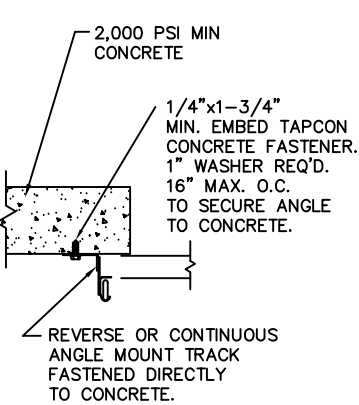

STEEL JAMBS

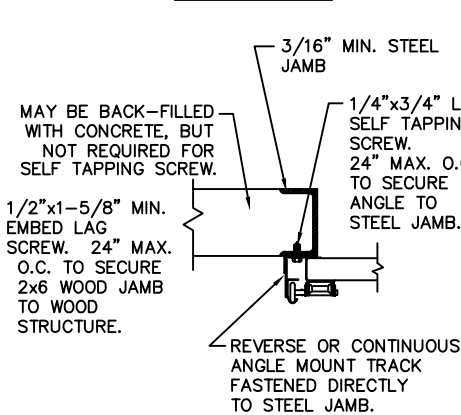

WOOD JAMBS

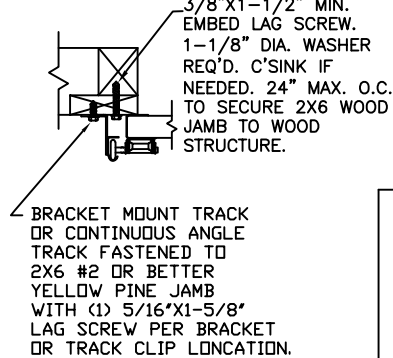

THE DESIGN OF THE
SUPPORTING STRUCTURAL
ELEMENTS IS THE RESPONSIBILITY
OF THE BUILDING ENGINEER OR
ARCHITECT OF RECORD.

DESIGN ENGINEER: JAMES D. WHEELER, P.E.
FLORIDA P.E. #91932

CLOPAY CORP.
ALL RIGHTS RESERVED.

Third Angle
Projection

Unless Stated Otherwise
TOLERANCES are
.0 = $\pm$.031
.00 = $\pm$.015
.000 = $\pm$.005
.0000 = $\pm$.001
Degrees = $\pm$ 1/2'
Unless Stated Otherwise
DIMENSIONS ARE IN INCHES.

Clopay
CORPORATION

8585 Duke Boulevard
Mason, OH 45040 USA
Tel. No. 513-770-4800
Fax No. 513-770-4853

DESCRIPTION: MODEL 37XX URETHANE INSULATED DOOR

DRAWN BY: BFA	DATE: 12/18/07	SCALE: N/A	DWG. SIZE: B
CHECKED BY: S.HAMILTON	DATE: 12/18/07	SHEET 1 OF 1	VER: IBC
DWG. NO.: 104044		MPC: C-DSIU-1D477	

DESIGN LOADS: +30.0 & -34.0 PSF
TEST LOADS +45.0 & -51.0 PSF