


'CLASSIC' RAISED PANEL EMBOSS DOORS								
MODELS	24 GA	24 GA INS	25 GA	25 GA INS	24 GA	24 GA INS	25 GA	25 GA INS
CLOPAY	84A, 94, 4F*	94V	73, 75	1500, 190	96	96V	75L, 76	76V
IDEAL	--	--	--	--	--	--	--	--
HOLMES	48B	--	42B	55S	--	--	--	--
SHORT PANEL					LONG PANEL			

* - MODEL 4F IS FLUSH





'CARRIAGE HOUSE' RAISED PANEL EMBOSS DOORS					DOOR HEIGHT		# OF SECTIONS
MODELS	25 GA	25 GA INS	25 GA	25 GA INS			
CLOPAY 'GALLERY'	GD5S, GR5S	GD5SV, GR5SV	GD5L, GR5L	GD5LV, GR5LV	UP TO 7'0"		4
HOLMES 'ARTISTRY'	AR5S	AR5SV	AR5L	AR5LV	7'3" TO 8'9"		5
					9'0" TO 10'6"		6
					10'9" TO 12'3"		7
					12'6" TO 14'0"		8
IDEAL 'CARRIAGE HOUSE'	ED5S	ED5SV	ED5L	ED5LV	14'3" TO 15'9"		9
					16'0"		10
SHORT PANEL					MAX SECTION HEIGHT: 21"		

SHEET 1 OF 2

REV	DATE	DESCRIPTION
08	05/19/05	UPDATED CODE REF.
09	09/26/05	ADDED ROLLER OPTION
10	11/30/07	ADDED 76V, EXTENDED HEIGHTS, COMBINED CLOPAY, HOLMES, AND IDEAL M/N
11	08/08/08	ADDED M/N 42B, 48B, 55S
12	10/21/08	ADDED M/N 4F
13	12/2009	ADDED 'CARRIAGE HOUSE' EMBOSS DOORS.
14	08/2010	REVISED MODEL TABLES.
15	01/2012	REVISED WIND SPEED TABLE FOR ASCE7-10.
16	04/2012	ADDED IMPACT RESISTANT OPTION.
17	11/09/20	UPDATED TITLE BLOCK AND REMOVED WIND CHART.
18	07/20/22	ADDED 94V.
19	02/23/24	ADDED M/N 96, 96V.
20	08/06/26	UPDATED MODEL TABLE.

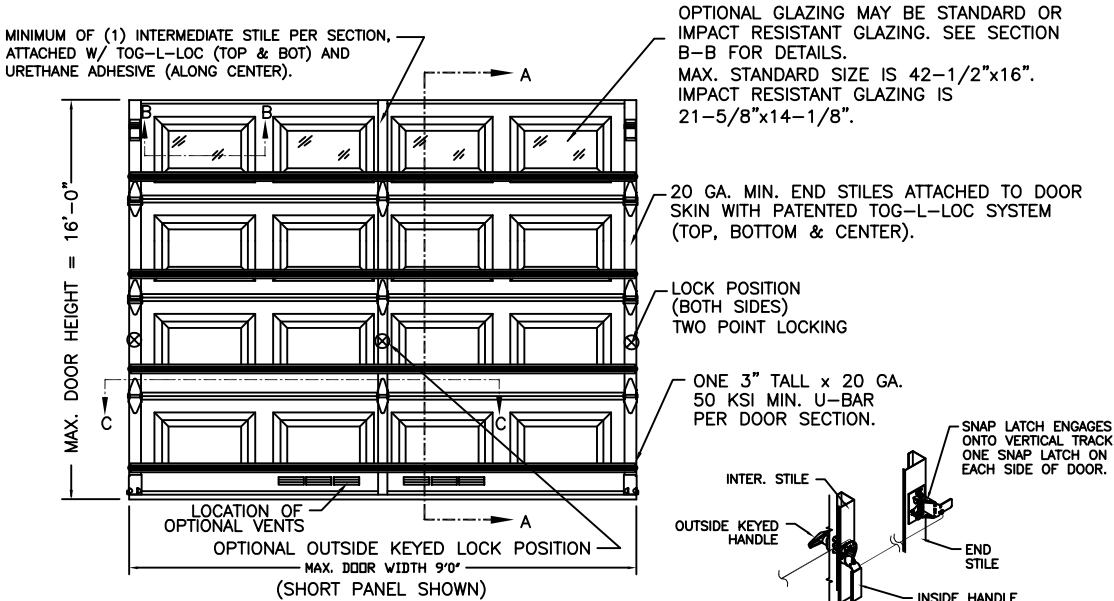


'CLASSIC' SHORT RAISED-PANEL SHOWN. LONG 'CLASSIC' AND SHORT 'CARRIAGE HOUSE' ARE ALSO APPROVED.

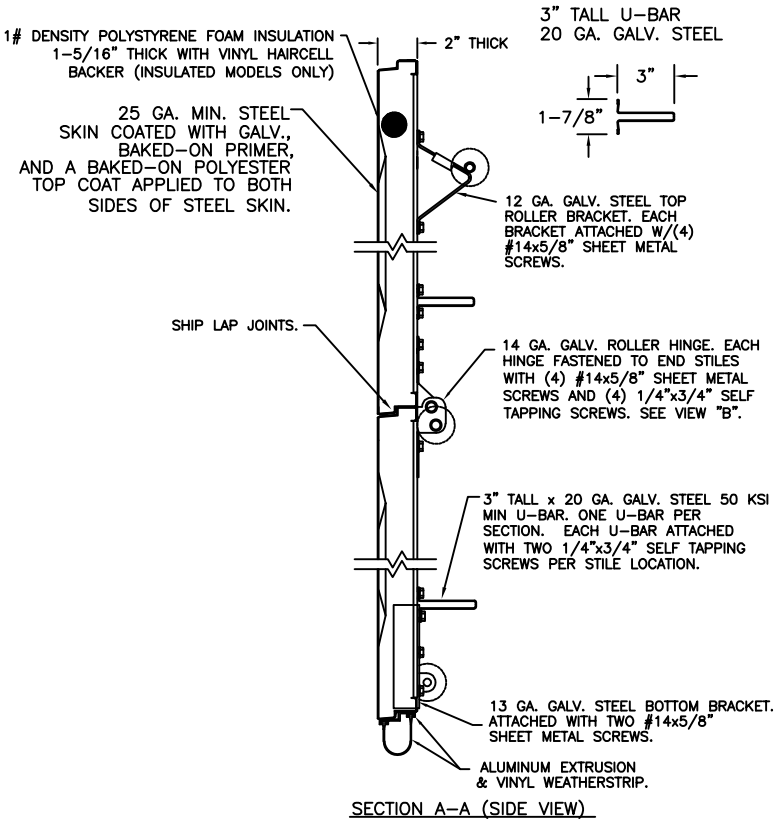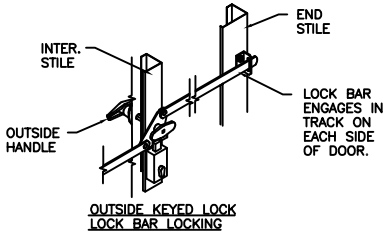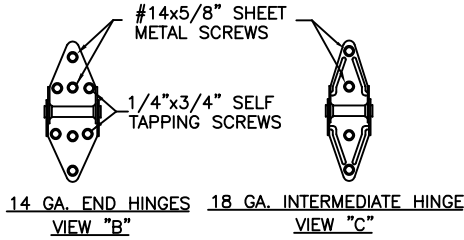

DESIGN LOADS: +25.0 P.S.F. & -32.0 P.S.F.
TEST LOADS: +37.5 P.S.F. & -48.0 P.S.F.

SEE SHEET TWO FOR
IMPACT RESISTANT CONSTRUCTION DETAIL "A"
AND STANDARD CONSTRUCT DETAIL "B";
TRACK AND JAMB DETAILS.

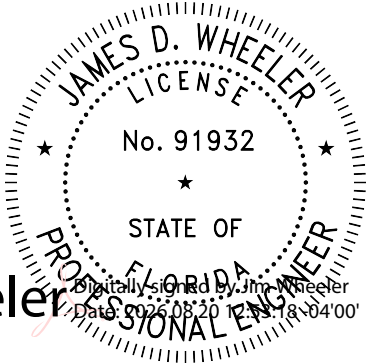

DESIGN ENGINEER: JAMES D WHEELER, P.E.
FLORIDA P.E. #91932

Clopay
CORPORATION

8585 DUKE BLVD.
MASON, OH 45040
(513) 770-4800

Clopay Corporation All Rights Reserved.

MANUFACTURING PRODUCT CODE PAN-2F151	WINDLOAD RATING W4	MAX. DOOR SIZE: 9'W x 16'H
DATE: 9/23/96	DESCRIPTION: CLASSIC AND CH RP STEEL PAN SINGLE-CAR, 9'W +25/-32 PSF	
DRAWN BY: MWW	B	DRAWING NUMBER: 300159
CHECKED BY:		VER: IBC

FLORIDA PRODUCT APPROVAL 48397.3

'CLASSIC' RAISED PANEL EMBOSS DOORS								
MODELS	24 GA	24 GA INS	25 GA	25 GA INS	24 GA	24 GA INS	25 GA	25 GA INS
CLOPAY	34A, 94, 4F*	94V	73, 75	1500, 190	96	96V	75L, 76	76V
IDEAL	--	--	--	--	--	--	--	--
HOLMES	48B	--	42B	55S	--	--	--	--
SHORT PANEL					LONG PANEL			

* - MODEL 4F IS FLUSH


'CARRIAGE HOUSE' RAISED PANEL EMBOSS DOORS				
MODELS	25 GA	25 GA INS	25 GA	25 GA INS
CLOPAY 'GALLERY'	GD5S, GR5S	GD5SV, GR5SV	GD5L, GR5L	GD5LV, GR5LV
HOLMES 'ARTISTRY'	AR5S	AR5SV	AR5L	AR5LV
IDEAL 'CARRIAGE HOUSE'	ED5S	ED5SV	ED5L	ED5LV
SHORT PANEL			LONG PANEL	

PREPARATION OF JAMBS BY OTHERS.

VERTICAL JAMB ATTACHMENT (WOOD FRAME BUILDINGS):
3/8"x3" LAG SCREWS ON 24" CENTERS. 1-1/8" O.D. WASHER REQUIRED. LAG SCREWS MAY BE COUNTERSUNK (BUT NOT REQUIRED) TO PROVIDE A FLUSH MOUNTING SURFACE. HORIZONTAL JAMBS DO NOT TRANSFER LOAD.



VERTICAL JAMB ATTACHMENT (C-90 BLOCK OR 2,000 PSI MIN. CONCRETE COLUMN):
3/8"x3" SLEEVE ANCHOR BOLTS ON 24" CENTERS (2,000 PSI MIN. CONCRETE). WASHERS INCLUDED WITH SLEEVE ANCHORS.
OR
1/4"x3" TAPCON SCREWS ON 24" CENTERS (2,000 PSI MIN. CONCRETE) OR 16" CENTERS (C-90 BLOCK), 1" O.D. WASHERS REQUIRED WITH TAPCONS. ANCHORS MAY BE COUNTERSUNK (BUT NOT REQUIRED) TO PROVIDE A FLUSH MOUNTING SURFACE. HORIZONTAL JAMBS DO NOT TRANSFER LOAD.

OTHER JAMB CONFIGURATIONS: REFER TO DASMA TDS-161. A LICENSED DESIGN PROFESSIONAL MAY ALSO BE EMPLOYED TO APPROVE ALTERNATE FASTENERS AND/OR JAMB CONFIGURATIONS.

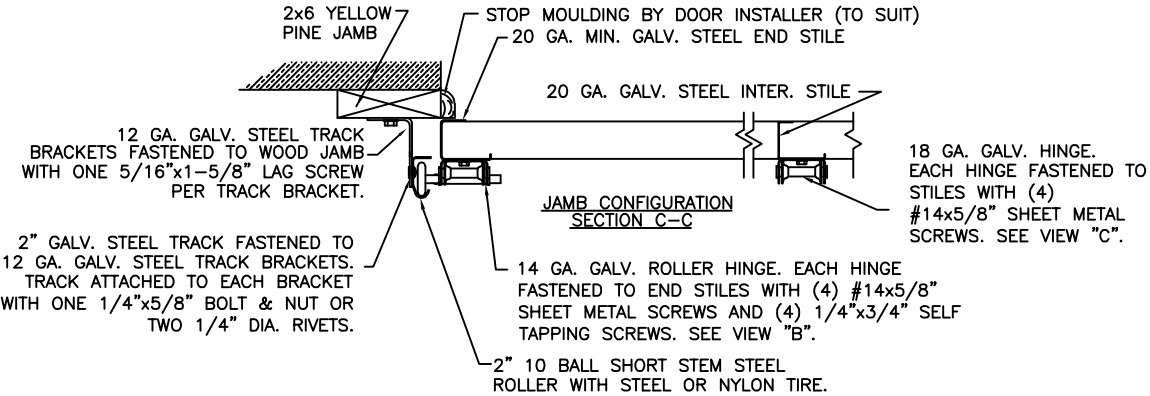

NOTE: THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THE DRAWING.

NOTE: TRACK CONFIGURATION ABOVE THE DOOR OPENING DOES NOT AFFECT THE WIND LOAD RATING OF THIS DOOR.

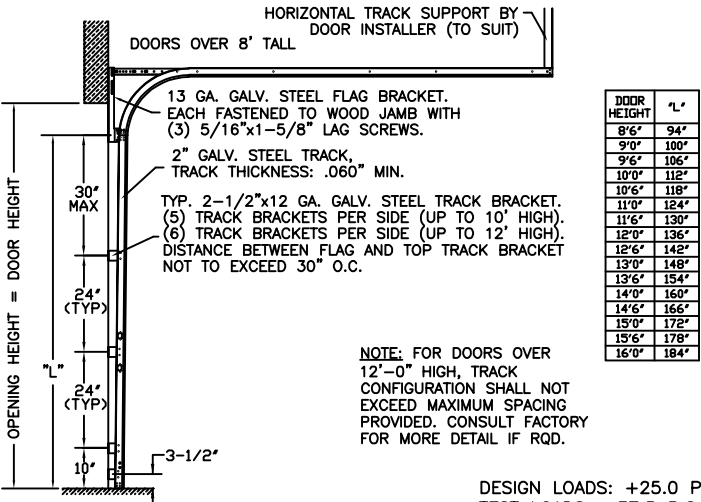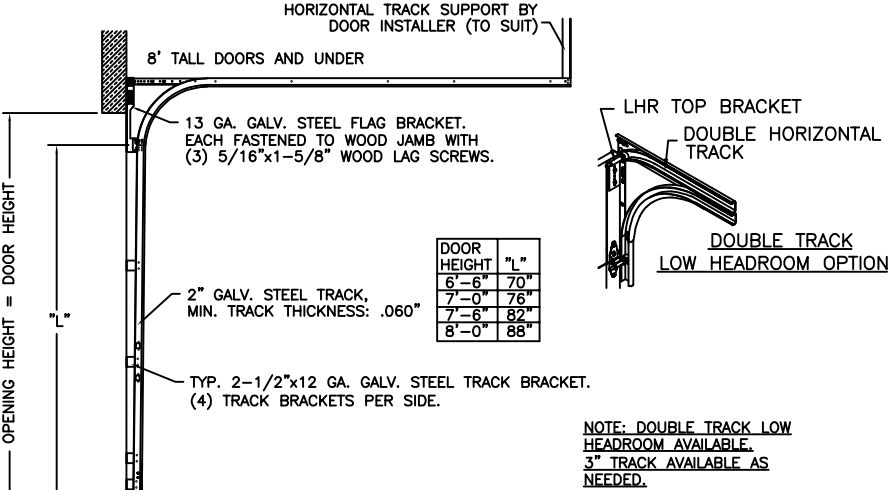

DESIGN LOADS: +25.0 P.S.F. & -32.0 P.S.F.
TEST LOADS: +37.5 P.S.F. & -48.0 P.S.F.

STANDARD ASSEMBLY DETAILS
DRAWING 300159-B

SECTION B-B (NON-IMPACT RESISTANT GLAZING OPTION)

FRONT FRAME WITH U.V. COATING ON OUTSIDE SURFACE. NOTE THAT FRONT FRAME IS NARROWER THAN IMPACT-RESISTANT FRAME.

MOLDED INSIDE LITE RETAINER.

GLAZING

1.25

#8x3/4" PAN HEAD SCREW.

STANDARD ASSEMBLY CONSTRUCTION:
OPTIONAL SSB, DSB OR 1/8" ACRYLIC LITES AVAILABLE.
OPTIONAL ACRYLIC GLAZING IS PLASKOLITE OPTIX OR LUCITE CP APPROVED CC2 PLASTIC IN ACCORDANCE WITH IBC/FBC 2606.
THE ENTIRE DOOR ASSEMBLY INSTALLED IN COMPLIANCE WITH THIS SECTION MEETS THE WIND LOAD REQUIREMENTS OF THE FLORIDA BUILDING CODE OR INTERNATIONAL BUILDING CODE BUT DOES NOT MEET THE IMPACT RESISTANT REQUIREMENT FOR WINDBORNE DEBRIS REGIONS (REF. CHAPTER 16 FBC/IBC).

DESIGN ENGINEER: JAMES D WHEELER, P.E.
FLORIDA P.E. #91932

Clopay CORPORATION

8585 DUKE BLVD.
MASON, OH 45040
(513) 770-4800

MANUFACTURING PRODUCT CODE
PAN-2F151

DATE: 9/23/96

DRAWN BY: MWW

CHECKED BY:

WINDLOAD RATING
W4

DESCRIPTION: CLASSIC AND CH RP STEEL PAN SINGLE-CAR, 9'W +25/-32 PSF

DRAWING NUMBER: 300159

VER: IBC

MAX. DOOR SIZE:
9'W x 16'H