


NOTE: DOUBLE TRACK LOW HEADROOM, HI-LIFT TRACK, FOLLOW-THE-ROOF TRACK, AND VERTICAL LIFT TRACK ARE AVAILABLE OPTIONS. 3" TRACK ALSO AVAILABLE.

THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS IS THE RESPONSIBILITY OF THE BUILDING ENGINEER OR ARCHITECT OF RECORD.

MAX. 12'-2" WIDE X 18'-0" HIGH


HORIZONTAL TRACK END HANGER BRACKET (SUPPLIED BY DOOR INSTALLER) CLOSSES ROLLER CHANNEL. INTERMEDIATE HANGER REQUIRED FOR DOORS 12'-0" AND HIGHER

MODELS AVAILABLE (CLOPAY/ HOLMES/ IDEAL)
MODELS 524, 520/ 224/ C4ST, C0ST
INSULATED MODELS 524S, 520S, 524VS, 224VS, C4SS, C0SS, C4SV


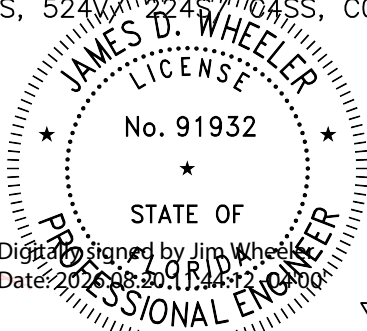


Jim Wheeler

Digital Signature of Jim Wheeler
Date: 20260820 11:44:12 AM

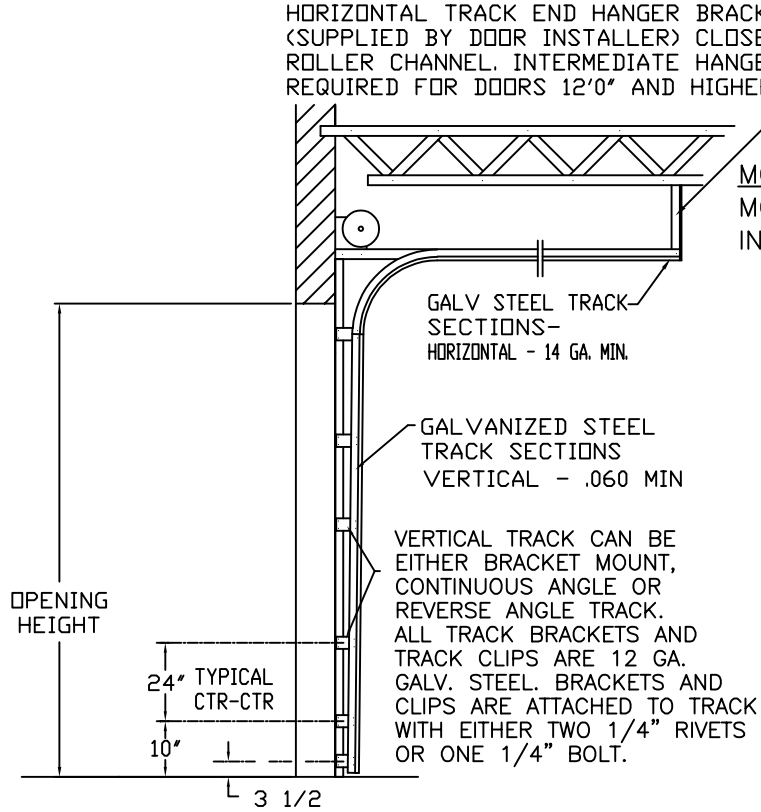


SIDE ELEVATION
STANDARD-LIFT TRACK DETAILS

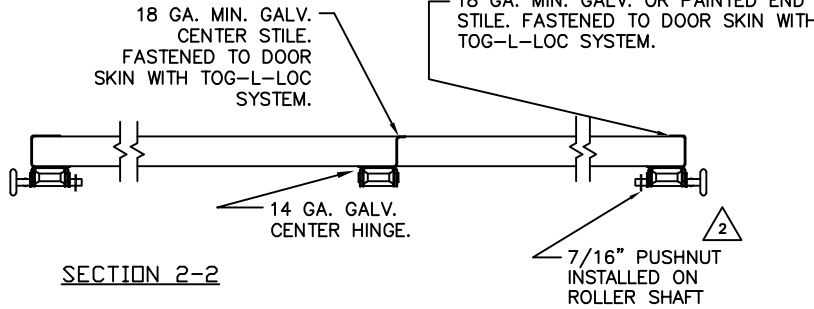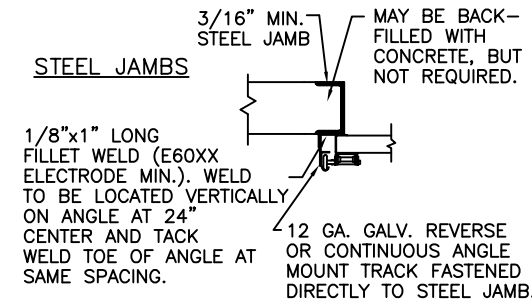


ANCHOR NOTE: FIRST (BOTTOM) ANCHOR STARTING AT NO MORE THAN HALF OF THE MAXIMUM ON-CENTER DISTANCE. HIGHEST ANCHOR INSTALLED AT LEAST AS HIGH AS THE DOOR OPENING.


WOOD JAMB ON CONCRETE

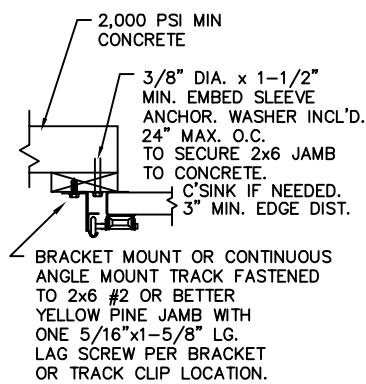


CONCRETE JAMBS

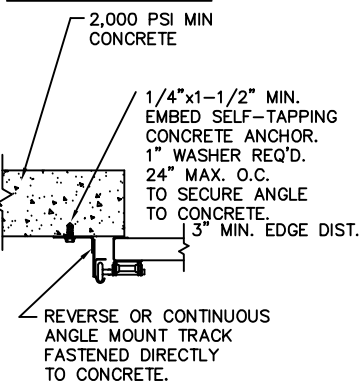

STEEL JAMBS

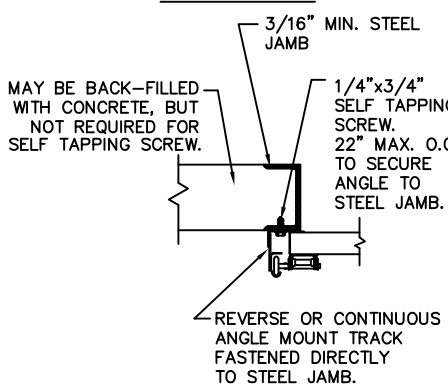

WOOD JAMBS

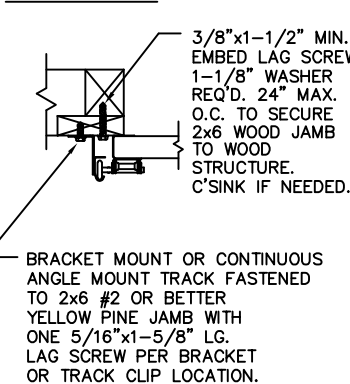

REVISIONS					
REV. NO.	ZONE:	DATE:	ECN NO.	APPVD:	DESCRIPTION
5	-	09/2005	-	-	CLARIFIED END STILE FINISH; ADDED ROLLER OPTION & FV SECTION
6	C3	06/2007	-	-	CLARIFIED U-BAR TABLE
7	-	11/2008	-	-	ADDED MPC AND WELDED JAMB ATTACH. DETAIL.
8	-	02/2012	-	-	UPDATED WINDCODE CHART
9	-	6/2/20	-	-	REVISED JAMB FASTENERS.
10	-	8/12/20	-	SH	UPDATED TITLE BLOCK AND REMOVED WIND CHART.

THE OPTIONAL GLAZING SHOWN ON THIS DRAWING MEETS THE WIND LOAD REQUIREMENTS OF THE FLORIDA BUILDING CODE OR INTERNATIONAL BUILDING CODE BUT DOES NOT MEET THE IMPACT RESISTANT REQUIREMENT FOR WINDBORNE DEBRIS REGIONS (REF. CHAPTER16 FBC/IBC)



OPTIONAL ALUMINUM FULL VISION WINDOW LITE SECTIONS AVAILABLE (1/8" DSB, 1/8" ACRYLIC, 1/4" WIRE, 1/2" INSUL.). FULL VISION SECTIONS TO HAVE SAME REINFORCEMENT AS OTHER SECTIONS. OPTIONAL ACRYLIC IS PLASKOLITE OPTIX, AN APPROVED CC2 PLASTIC IN COMPLIANCE WITH IBC/FBC 2606.

3" x 20 GA. GALV. STEEL U-BARS ARRANGED WITH 2 BARS PER SECTION U-BARS ATTACHED AT EACH STILE LOCATION WITH (2) 1/4" x 3/4" SELF-TAPPING SCREWS

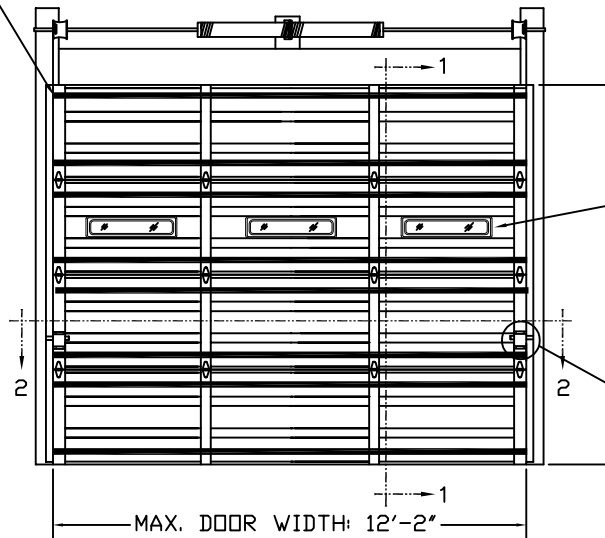


TABLE 1

DOOR HEIGHT	TOTAL U-BARS REQUIRED
4'3" TO 6'0"	6
6'3" TO 8'0"	8
8'3" TO 10'0"	10
10'3" TO 12'0"	12
12'3" TO 14'0"	14
14'3" TO 16'0"	16
16'3" TO 18'0"	18

DESIGN ENGINEER:
JAMES D. WHEELER, P.E.
FLORIDA LICENSE No. 91932

MANUFACTURING PRODUCT CODE:
MPC: C-PAN-1E448

CLOPAY CORP.
ALL RIGHTS RESERVED.

Third Angle
Projection

Unless Stated Otherwise
TOLERANCES are

.0 = ±.031
.00 = ±.015
.000 = ±.005
.0000 = ±.001
Degrees = ± 1/2°

Unless Stated Otherwise
DIMENSIONS ARE IN INCHES.

Clopay
CORPORATION

8585 Duke Boulevard
Mason, OH 45040 USA
Tel. No. 513-770-4800
Fax No. 513-770-4853

DESCRIPTION: COMMERCIAL RIBBED DOOR

DRAWN BY: RJK

DATE: 10/15/01

SCALE: NOTED

DWG. B

CHECKED BY: MWW

DATE: 10/01

SHEET 1 OF 1

DWG. NO.: 102446