


MODEL DESIGNATION: Simonton Double Hung H-Mulled Triple or Twin Series 07-09 / 07-10 / 07-20 Vinyl Window

MAXIMUM OVERALL NOMINAL SIZE: See Size Chart


DESIGN PRESSURE RATING: See Size Chart

USABLE CONFIGURATIONS: $\frac{X}{X} \frac{X}{X} \frac{X}{X}$ or $\frac{X}{X} \frac{X}{X}$

GENERAL DESCRIPTION: The head, sill, and side jambs are extruded PVC. The wall thickness through which the anchor screw penetrates is a minimum of 0.070".

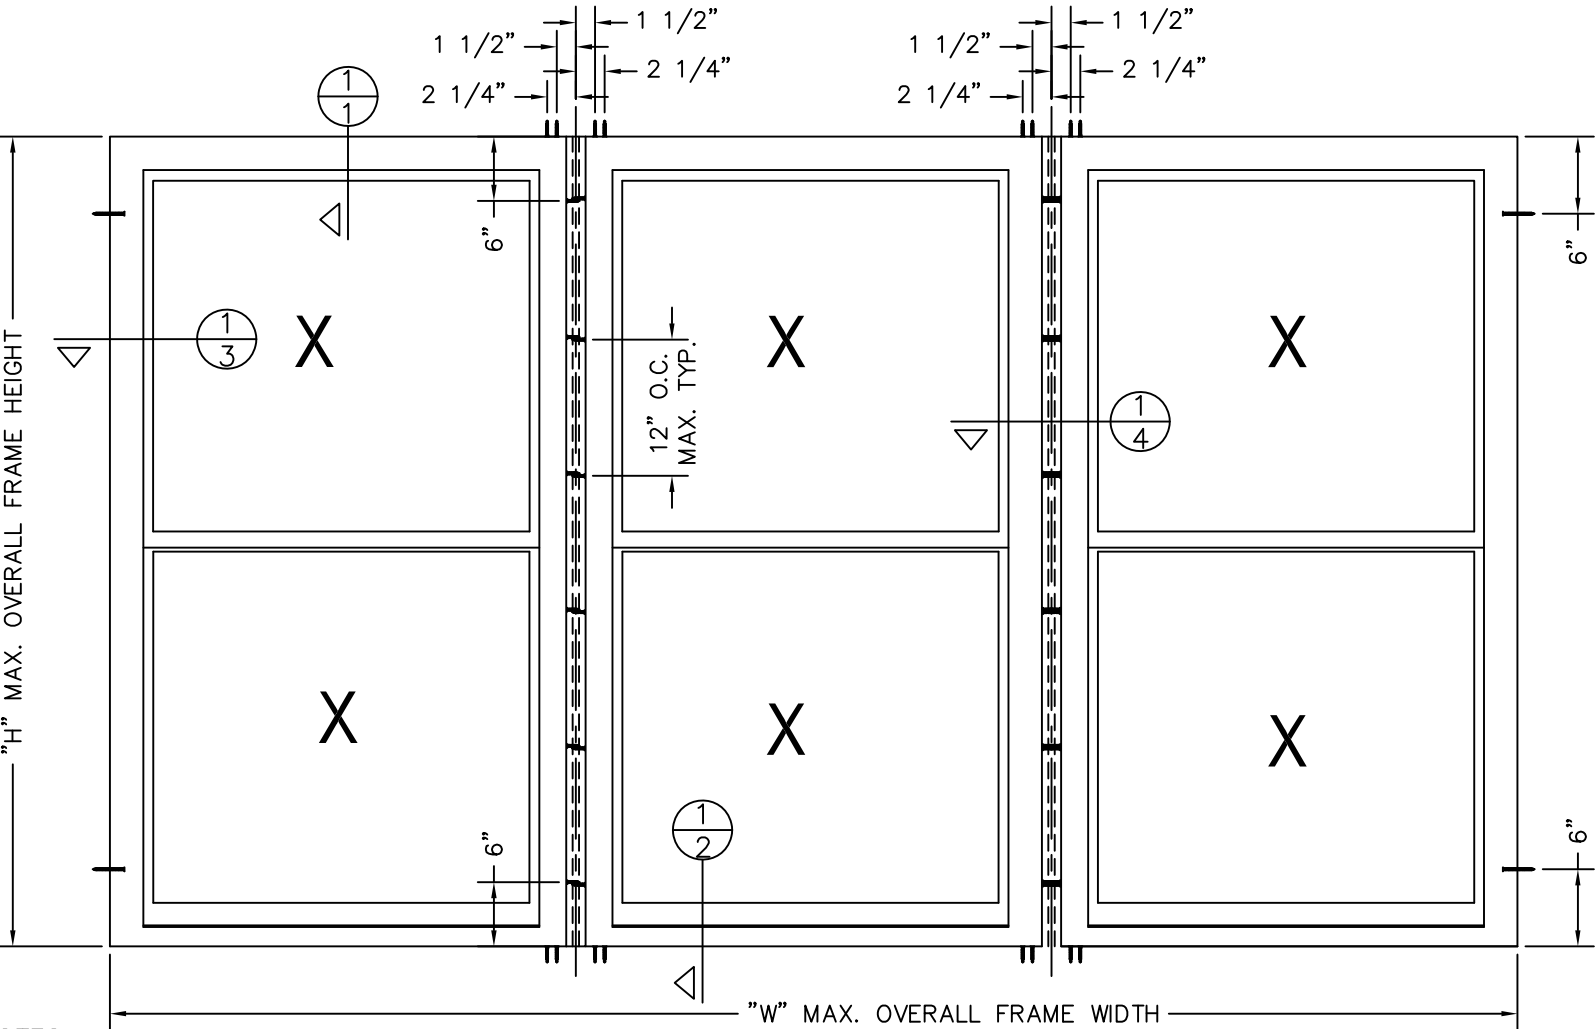


- NOTES:
- This installation has been evaluated for use in locations adhering to the Florida Building Code and where pressure requirements as determined by ASCE 7 Minimum Design Loads for Buildings and Other Structures do not exceed the design pressure ratings herein. For use outside the H.V.H.Z only.
 - All interior and exterior perimeter surfaces of the window must be caulked.
 - Anchors shall be specified and spaced as shown. Anchor embedment into base material shall be beyond wall dressing or stucco and into wood. Anchors must achieve a minimum embedment of 1 1/2" into wood and maintain a minimum edge distance of 1".
 - The responsibility for selection of Simonton products to meet any applicable local laws, building codes, ordinances or other safety requirements rests solely with the architect, building owner or contractor.
 - Shims (by others) are optional. Maximum shim stack is 1/4".
 - Wood bucks (by others) must be engineered and anchored properly to transfer loads to the structure.
 - When used in areas requiring impact protection, this product **REQUIRES** the use of impact resistant shutters or other external protection.
 - Flashing (by others) must be applied using the ASTM E 2112 method appropriate for the opening into which the window is being installed.
 - Glazing complies with ASTM E 1300.
 - Designation "X" is for Operable panel and "O" is for Fixed Panel.

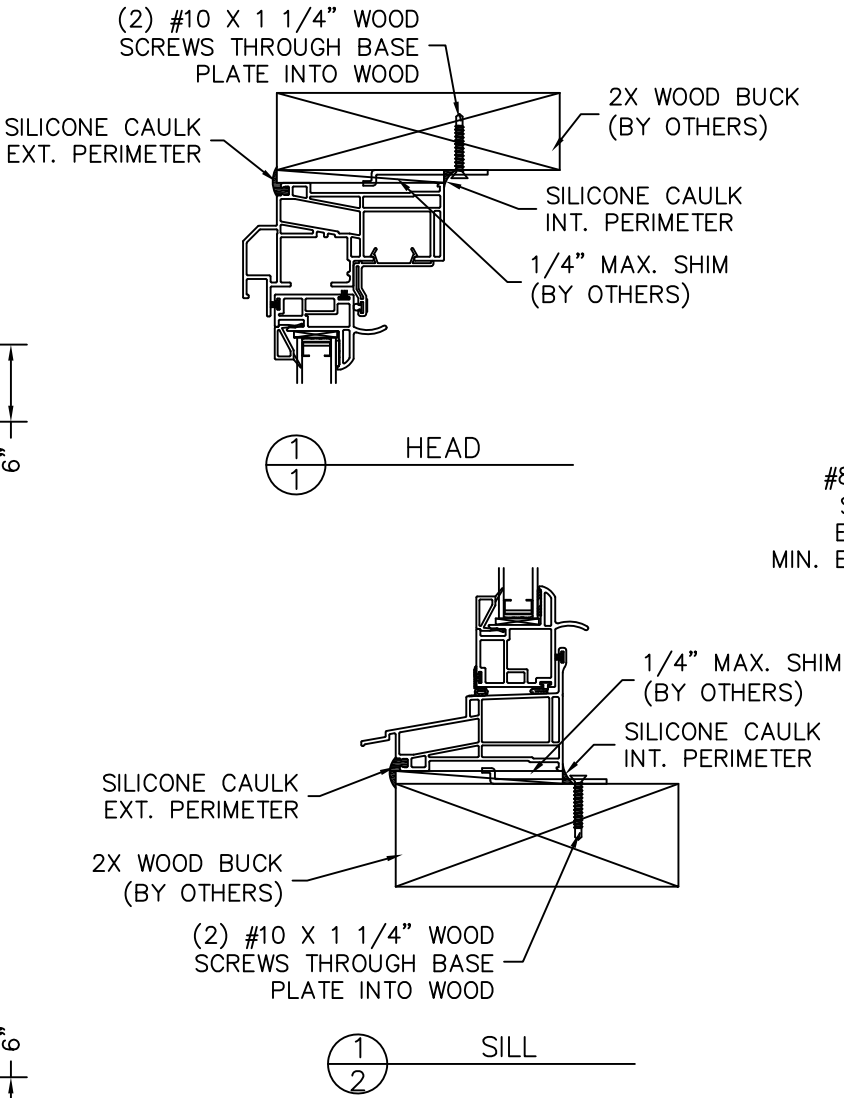

CONFIGURATION TYPE	OVERALL SIZE		DP RATING
	WIDTH "W"	HEIGHT "H"	
TRIPLE	126"	76"	±50 PSF
	160"	76"	
TWIN	84"	76"	
	107"	76"	

REV. #	REVISIONS:	REVISED BY:	DATE:
1	UPDATED SIZES PER NEW TESTING.	T.D.D.	01/29/14
2	ADDED MIN. EDGE DIST. NOTE.	B.J.S.	06/17/15
3	UPDATED TO CURRENT FBC.	K.K.B.	06/03/24
.	.	.	.
.	.	.	.

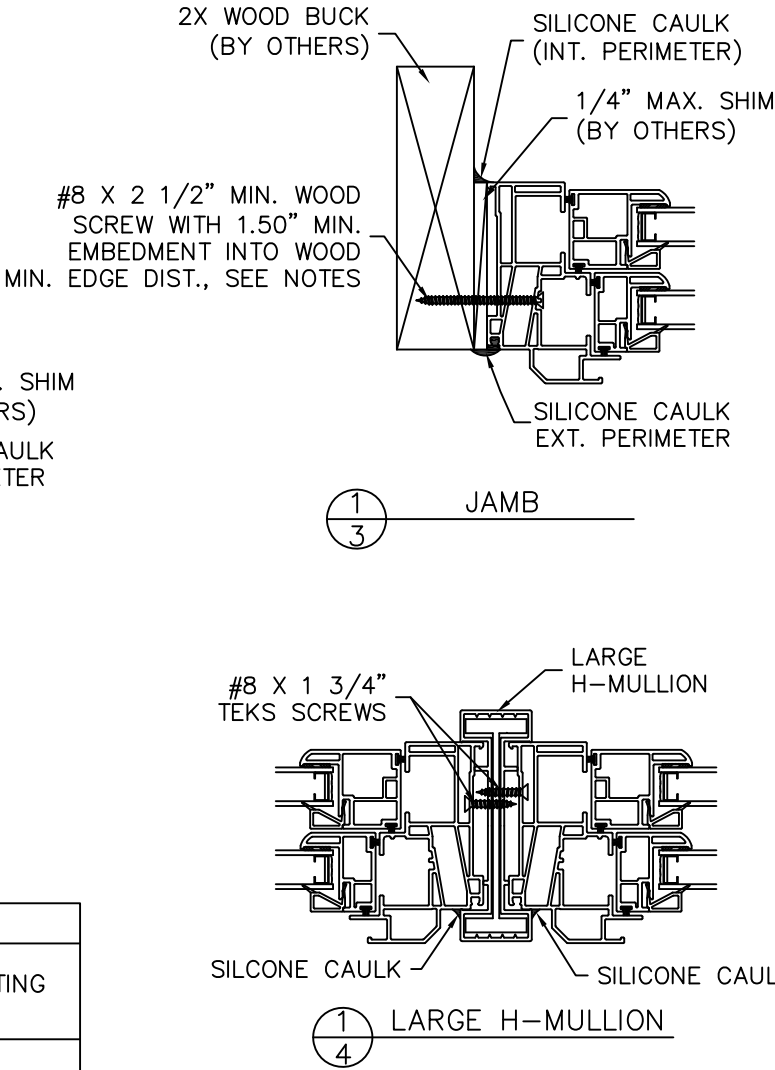

DISCLOSURE STATEMENT

This document is the property of Simonton Windows, which retains all proprietary and other rights to its subject matter. This document is provided to the recipient on the expressed condition that it is not to be disclosed, reproduced in whole or part, nor used in conjunction with the design, manufacture or repair of goods for anyone other than Simonton Windows without its consent. This restriction does not limit the recipient's rights to utilize information contained in this document which is properly obtained from another source.

FILE: FL 5167

MATERIAL:

RMS FINISH: EXCEPT AS NOTED

ALLOY & TEMPER:

WEIGHT: VOLUME:

SURFACE AREA: PERIMETER:

FINISH TREATMENT:

Dimensional Tolerances Unless Otherwise Specified

Decimals Angles

.X ± .03

.XX ± .01

.XXX ± .005

0° 30 min.

SIMONTON WINDOWS

1 Cochrane Avenue
Pennsboro, WV 26415

SIZE: DRAWING NO.: REV.:
B IN0555 3

DRAWN BY: DATE:
T.D.D. 06/05/13

CHECKED BY: DATE:

SCALE: FIT SHEET: 1 of 1 APPR'V'D BY: DATE:

SERIES: 07-09/10/20 DOUBLE HUNG H-MULLED TRIPLE OR TWIN

TITLE: 2X BUCK INSTALLATION