


DESIGN PRESSURE : ± 70 PSF

MORTISE LOCK SPECIFICATIONS:

ANSI A156.13-2002 GRADE 1 SECTIONS 9 THRU 12
 ASTM F476-1991, ASTM E 330, ASTM F842
 UL LISTED FOR 3 HOUR DOORS
 - FIRE DOOR RATING TO BE REVIEWED
 BY BUILDING OFFICIAL
 CONFORMS TO AMERICANS WITH DISABILITIES ACT(ADA)
 DOOR THICKNESS: 1 11/32 TO 1 3/4" DOOR STANDARD
 BACKSET: 2 3/4"
 HAND: FIELD REVERSIBLE
 DEADBOLT: HARDENED STEEL 1" THROW
 LATCHBOLT: ANTI-FRICTION WITH 3/4" PROJECTION
 STRIKE: ANSI STANDARD A115.1 FLAT LIP NON HANDED
 LEVERS: SOLID BRASS

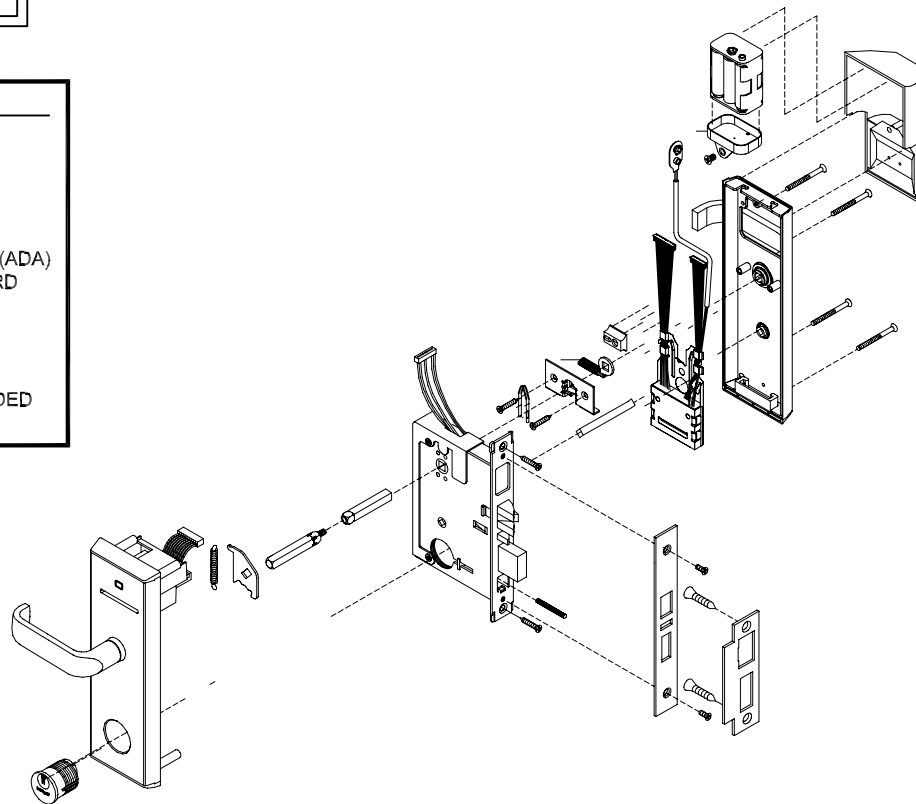

ASSA ABLOY
 Global Solutions

VingCard Elsafe
 9935 Forest Lane
 Dallas, TX 75243

US ANSI & CLASSIC MORTISE LOCKSETS

FL5263

FBC CERTIFICATION

SIZE B	DWG No.	REV C
	FBC101404	
SCALE	NONE	SHEET: 1 of 1