
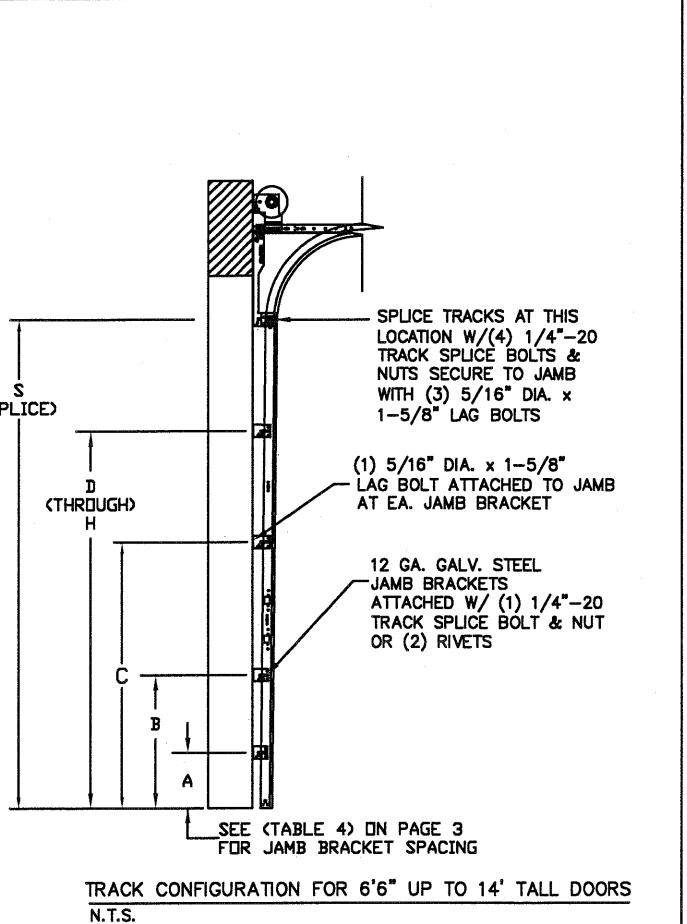
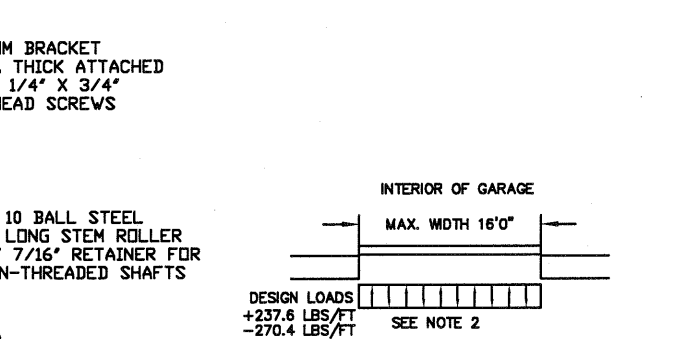
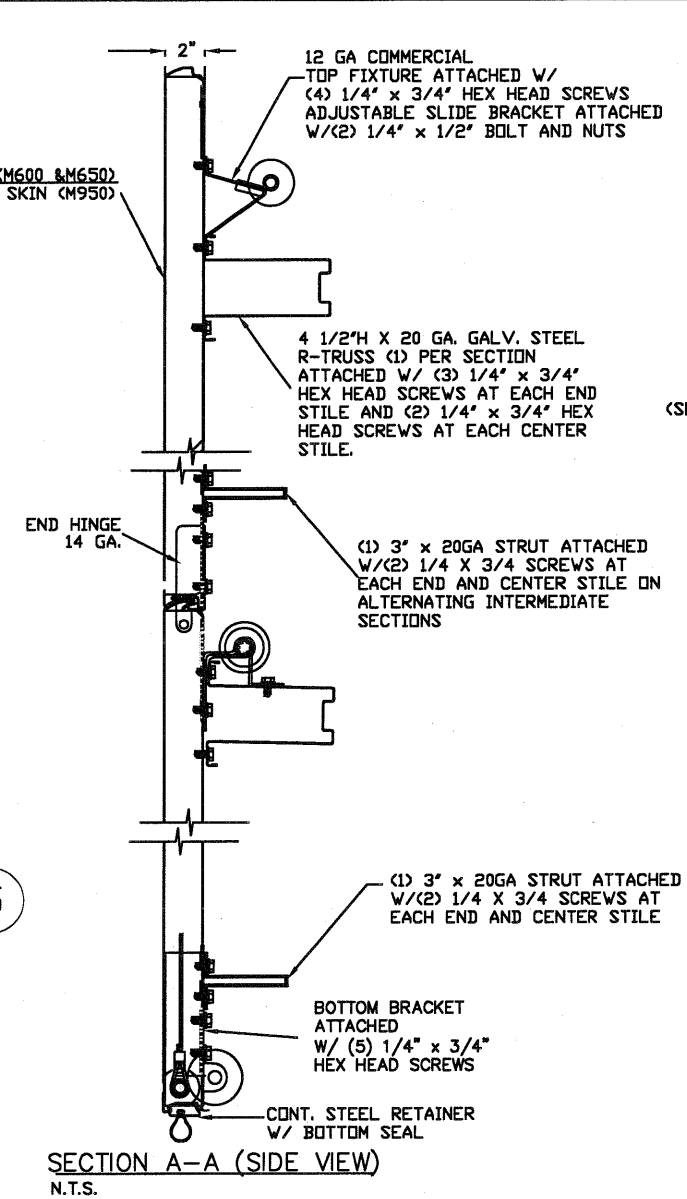
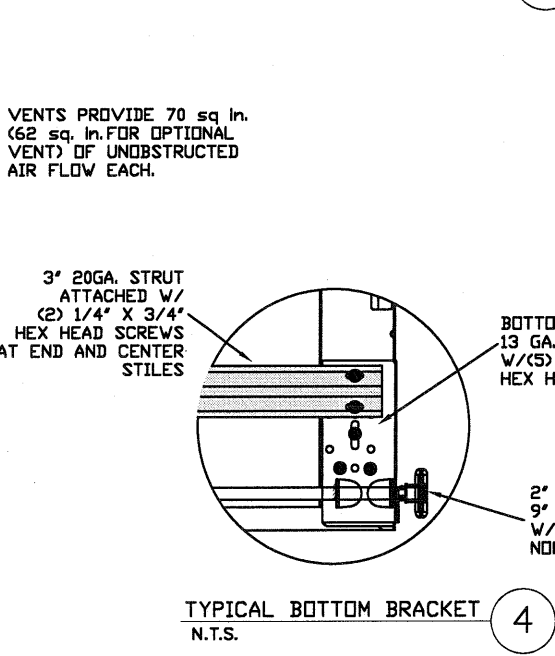
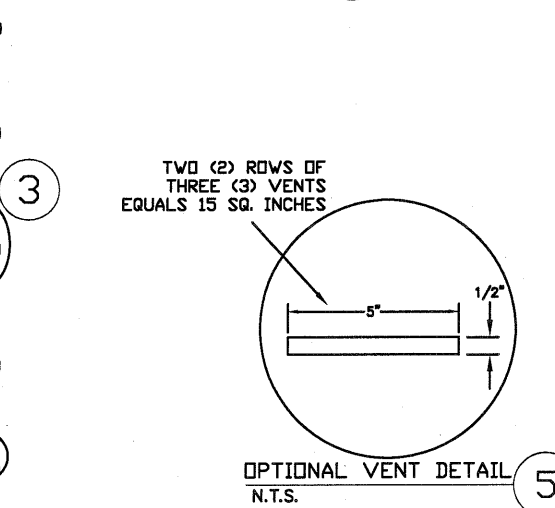
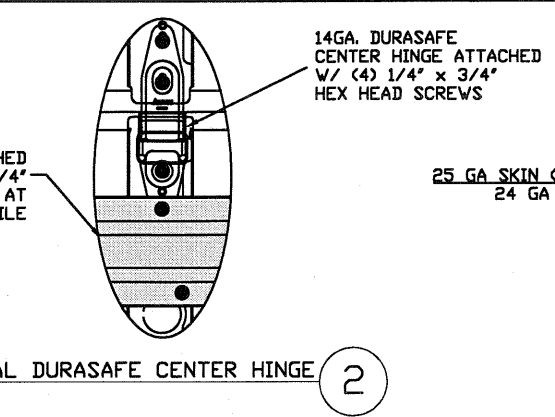
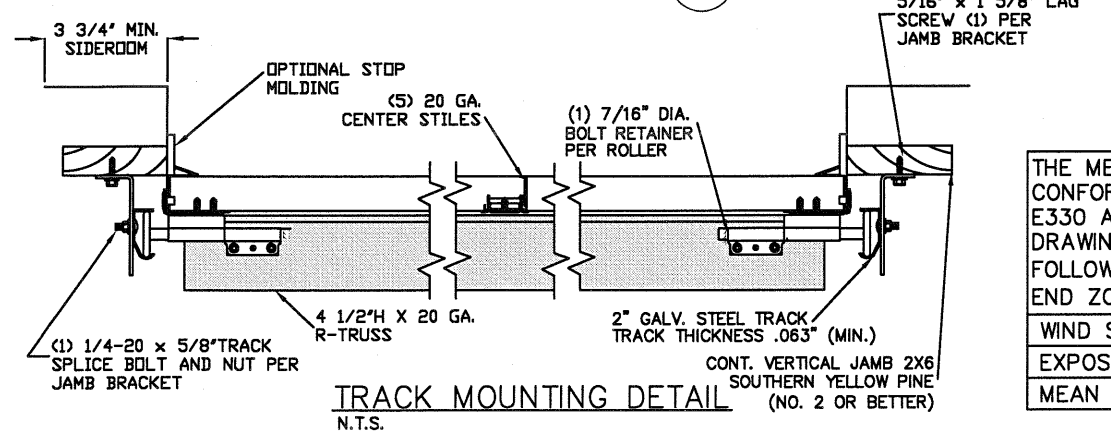
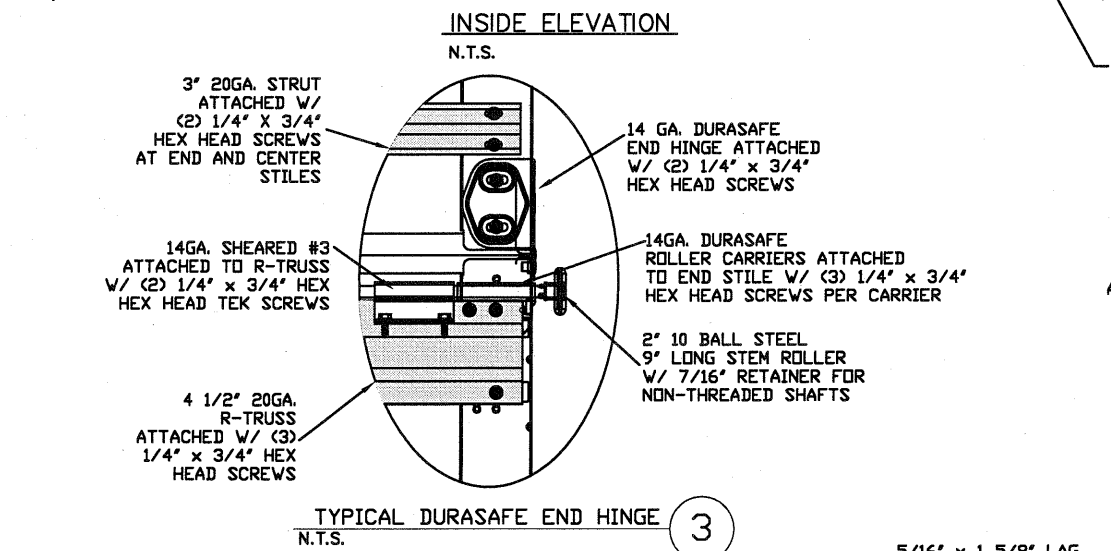


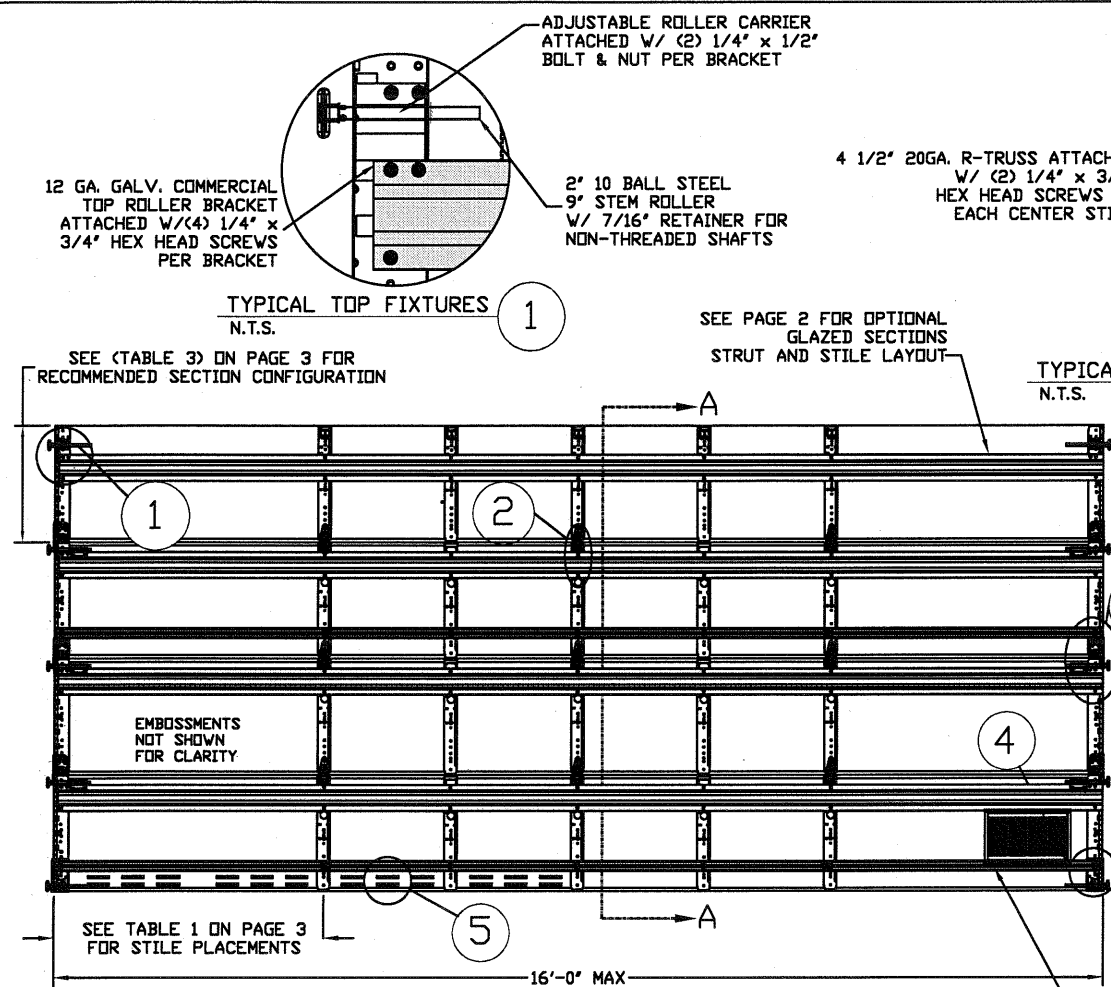

REV	DESCRIPTION OF REVISIONS	DATE	BY
A	UPDATED BOTTOM BRACKET INFORMATION ADDED OAKSUMMIT AND GLAZING OPTIONS	07/12/05	DLJ
B	REVISED NOTE 6	09/02/08	DLJ
C	REMOVED TABLES 4-5, NOTE 7.	05/20/09	CBT
E	WIND SPEED TABLE & TRACK CONFIGURATIONS	04/20/12	RLR
F	ADDED LONG PANEL GLAZING OPTION	08/10/15	RS

MAX SIZE
16' WIDTH
14' HEIGHT
(DOOR HEIGHT
SUBJECT TO
WEIGHT LIMITATIONS)

DESIGN LOADS
+29.7 PSF
-33.8 PSF

TEST LOADS
+44.6 PSF
-50.7 PSF

THOMAS L. SHELMEYER
LICENSE
No. 48579
STATE OF
FLORIDA
PROFESSIONAL ENGINEER
FL

Thomas L. Shelmeyre, PE (FL PE #0048579)
Structural Solutions, PA (FL Firm #29412)

THE METHOD OF TESTING WAS IN SUBSTANTIAL CONFORMANCE WITH THE PROCEDURE DESCRIBED IN ASTM E330 AND DASMA 108. THE PRESSURES SHOWN ON THE DRAWINGS WERE CALCULATED USING ASCE 7-16 WITH THE FOLLOWING PARAMETERS (5 FEET OF DOOR WIDTH IN THE END ZONE, ROOF AT ANY SLOPE):

WIND SPEED (MPH)	181	164	156	149	143
EXPOSURE LEVEL	B	C	C	D	D
MEAN ROOF HEIGHT	30'	15'	25'	15'	25'

- SPECIFICATIONS AND NOTES**
- ALL THE LOAD FROM THE DOOR IS TRANSFERRED TO THE VERTICAL TRACK. FROM THE TRACK THE LOAD IS TRANSFERRED TO THE VERTICAL JAMBS. THE HORIZONTAL JAMB OR HEADER RECEIVES NO PORTION OF THE LOAD TRANSFERRED FROM THE DOOR.
 - EACH VERTICAL JAMB RECEIVES MAXIMUM DESIGN LOADS OF:
+237.6 LBS/FT & -270.4 LBS/FT
 - DOORS AND HARDWARE WILL BE DESIGNED, MANUFACTURED AND INSTALLED WITH STANDARDS AS SET FORTH BY DASMA.
 - DOOR SECTIONS SHALL BE 25 GA. MIN. (.019") ROLLED FORMED LIGHT COMMERCIAL QUALITY
 - SUPPORTING STRUCTURAL ELEMENTS SHALL BE DESIGNED BY A REGISTERED PROFESSIONAL ENGINEER FOR WIND LOADS INDICATED ON THIS DRAWING IN ADDITION TO OTHER LOADINGS.

Amarr

MODEL #650 AMARR OAK SUMMIT 1000, 2000
MODEL #600 AMARR STRATFORD 1000, 2000
MODEL #950 AMARR HERITAGE 1000, 2000
Short, Long, Flush & Oak Summit Panel's

SIZE	DRAWN BY DLJ	DATE 08/13/03	DRAWING NUMBER
B	CHECKED BY AAE	DATE 08/13/03	IRC-6016-140-24

ENTREMATTEC
165 CARRIAGE COURT WINSTON-SALEM, N.C. 27105



SHEET 1 OF 3

WOOD JAMB ATTACHMENT TO STRUCTURE


2 X 6 VERTICAL JAMB ATTACHMENT TO WOOD FRAME STRUCTURE
 5/16" X 3" LAG SCREWS STARTING 6" FROM ENDS THEN 20" O.C. (1 1/2" EMBEDMENT)
2 X 6 VERTICAL JAMB ATTACHMENT TO 2,000 PSI CONCRETE
 HILTI KWIK BOLT 3/8" X 4" STARTING 6" FROM ENDS THEN 24" O.C. (2 1/2" EMBEDMENT)
 HILTI SLEEVE ANCHOR 3/8" X 2-3/4" STARTING 6" FROM ENDS THEN 18" O.C. (1 1/4" EMBEDMENT)
 ITW/RAMSET REDHEAD (TRU-BOLT) 3/8" X 4" STARTING 6" FROM ENDS THEN 24" O.C. (2 1/2" EMBEDMENT)
2 X 6 VERTICAL JAMB ATTACHMENT TO HOLLOW C-90 BLOCK
 SIMPSON 1/4" X 3" TITEN SCREWS STARTING 6" FROM ENDS, USE PAIRS OF FASTENERS (3" APART) AT 8" O.C. (1 1/2" EMBEDMENT)
 HILTI 1/4" X 2-3/4" KWIK-CON II+ SCREWS STARTING 6" FROM ENDS, USE PAIRS OF FASTENERS (3" APART) AT 8" O.C. (1 1/4" EMBEDMENT)

2 X 6 VERTICAL JAMB ATTACHMENT TO GROUTED C-90 BLOCK (2000 PSI GROUT)
 HILTI SLEEVE ANCHOR 3/8" X 2-3/4" STARTING 6" FROM ENDS THEN 20" O.C. (1 1/4" EMBEDMENT) (OR, USE FASTENERS FOR HOLLOW C-90 BLOCK)

*LAGS AND BOLTS CAN BE COUNTERSUNK TO PROVIDE A FLUSH MOUNTING SURFACE.
 *PREPARATION OF WOOD JAMBS BY OTHERS

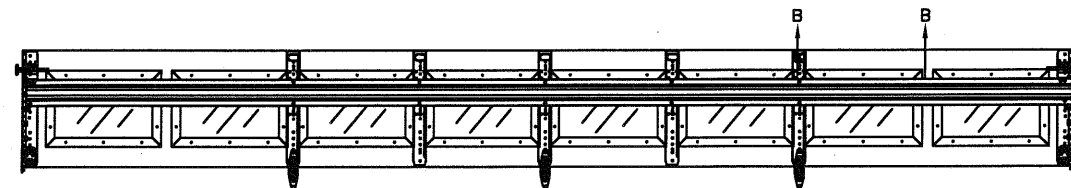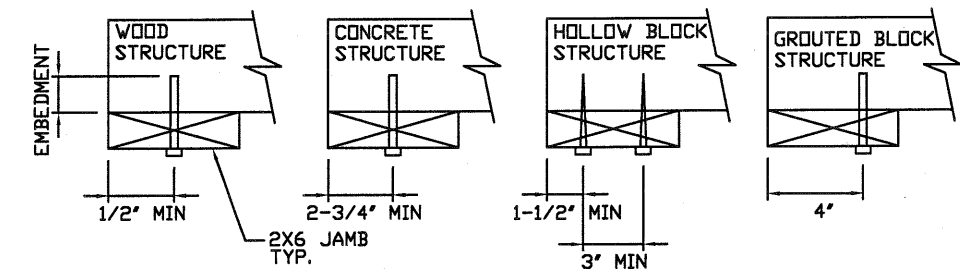


OPTIONAL SHORT PANEL GLAZED SECTION STRUT AND STILE LAYOUT

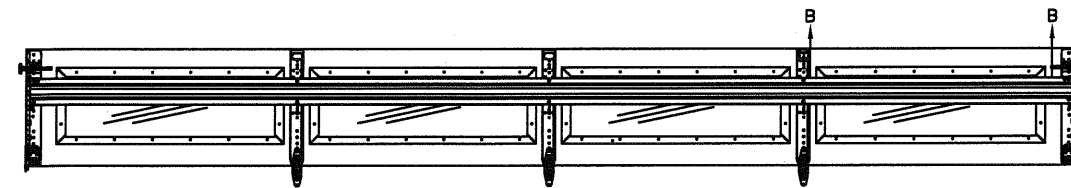


OPTIONAL LONG PANEL GLAZED SECTION STRUT AND STILE LAYOUT

LONG PANEL GLAZING OPTION AVAILABLE ONLY ON DOORS 15'6" THROUGH 16'0" WIDE. DOORS LESS THAN 15'6" WIDE MUST USE SHORT PANEL GLAZING OR CLOSED SECTIONS

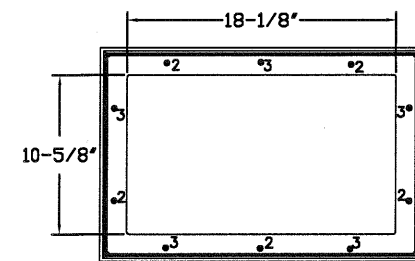

SHORT PANEL GLAZING FASTENER DETAIL

N.T.S.

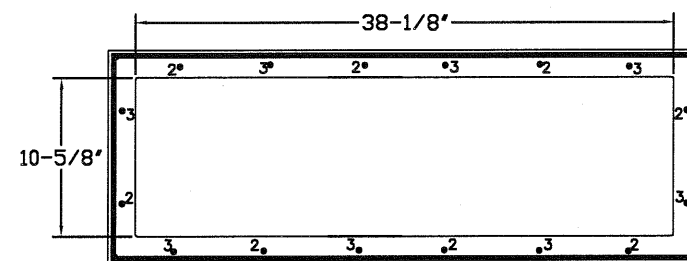


LONG PANEL GLAZING FASTENER DETAIL


N.T.S.

GLAZING OPTION CROSS SECTION

GLAZING NOT AVAILABLE IN WIND-BORNE DEBRIS REGION
 GLAZING MEETS ASTM E1300-04

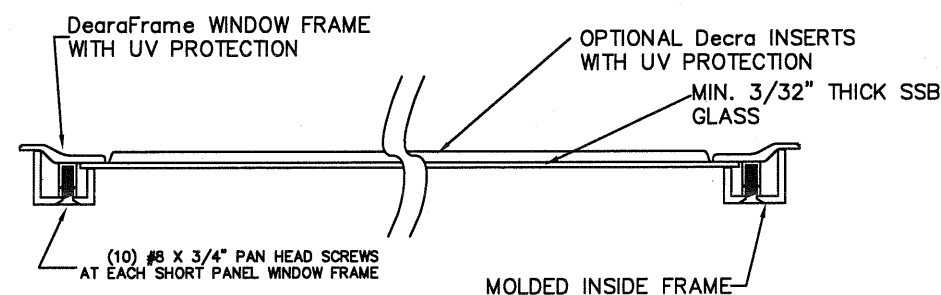

SECTION B-B

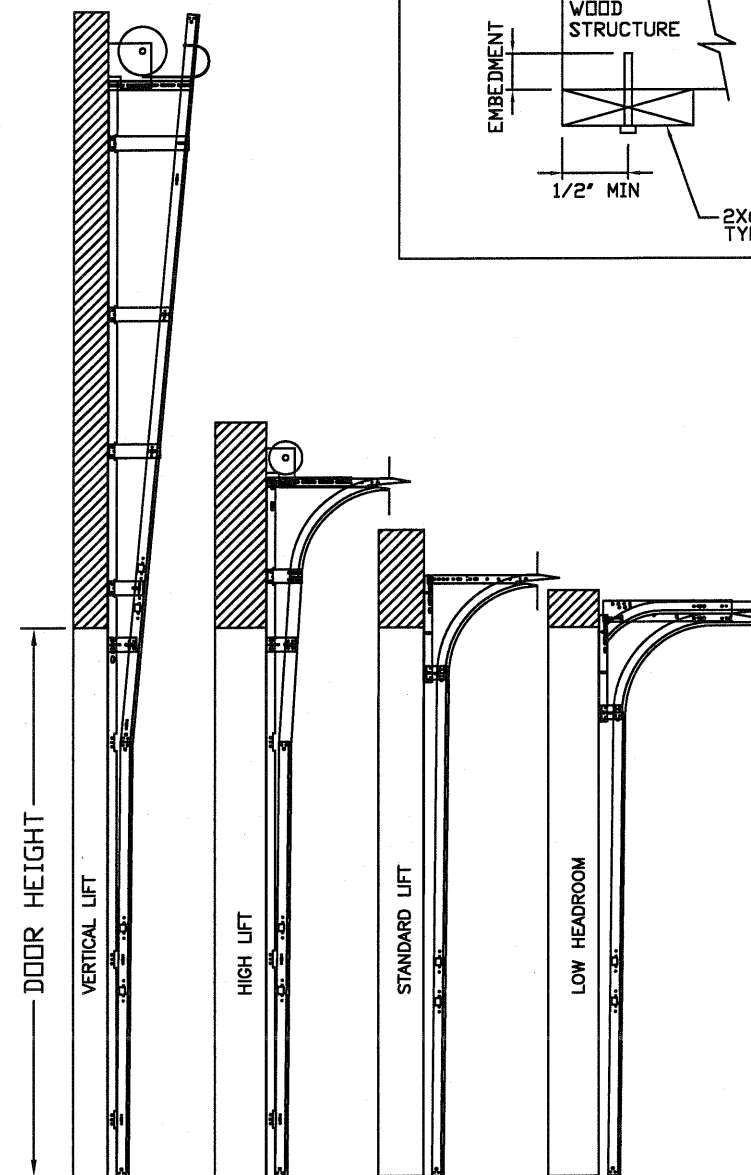

AVAILABLE TRACK CONFIGURATIONS

N.T.S.


REV	DESCRIPTION OF REVISIONS	DATE	BY
A	UPDATED BOTTOM BRACKET INFORMATION ADDED OAKSUMMIT AND GLAZING OPTIONS	07/12/05	DLJ
B	REVISED NOTE 6	09/02/08	DLJ
C	REMOVED TABLES 4-5, NOTE 7.	05/20/09	CBT
E	WIND SPEED TABLE & TRACK CONFIGURATIONS	04/20/12	RLR
F	ADDED LONG PANEL GLAZING OPTION	08/10/15	RS

MAX SIZE
 16' WIDTH
 14' HEIGHT
 (DOOR HEIGHT
 SUBJECT TO
 WEIGHT LIMITATIONS)

DESIGN LOADS
 +29.7 PSF
 -33.8 PSF

TEST LOADS
 +44.6 PSF
 -50.7 PSF

Thomas L. Shelmerdine, PE (FL PE #0048579)
 Structural Solutions, PA (FL Firm #29412)



dba Structural Solutions of North Carolina, Inc.
 5921-G W. Friendly Ave., Greensboro, NC 27410

Amarr

MODEL #650 AMARR OAK SUMMIT 1000, 2000
 MODEL #600 AMARR STRATFORD 1000, 2000
 MODEL #950 AMARR HERITAGE 1000, 2000
 Short, Long, Flush & Oak Summit Panel's

SIZE	DRAWN BY	DLJ	DATE	08/13/03	DRAWING NUMBER
B	CHECKED BY	AAE	DATE	08/13/03	IRC-6016-140-24
ENTREMATIC 165 CARRIAGE COURT WINSTON-SALEM, N.C. 27105					SHEET 2 OF 3

TABLE 1

Section	Panel Type	Center Stile Locations (Measured from Left Edge)				
		1st (in)	2st (in)	3rd (in)	4th (in)	5th (in)
10' 0	Short	48.41	71.59			
10' 0	Long	30.00	60.00	90.00		
10' 0	Oak Summit	30.63	60.00	89.38		
12' 0	Short	48.81	72.00	95.19		
12' 0	Long	49.63	72.00	94.38		
12' 0	Oak Summit	48.31	72.00	95.69		
12' 2	Short	49.64	73.00	96.36		
12' 2	Long	50.08	73.00	95.92		
12' 2	Oak Summit	49.06	73.00	96.94		
12' 4	Short	50.64	74.00	97.36		
12' 4	Long	51.08	74.00	96.92		
12' 4	Oak Summit	49.81	74.00	98.19		
12' 6	Short	50.67	75.00	99.33		
12' 6	Long	51.17	75.00	98.83		
12' 6	Oak Summit	50.56	75.00	99.44		
12' 8	Short	51.67	76.00	100.33		
12' 8	Long	52.10	76.00	99.90		
12' 8	Oak Summit	51.31	76.00	100.69		
12' 10	Short	52.25	77.00	101.75		
12' 10	Long	53.10	77.00	100.90		
12' 10	Oak Summit	52.06	77.00	101.94		
13' 0	Short	53.00	78.00	103.00		
13' 0	Long	54.10	78.00	101.90		
13' 0	Oak Summit	52.81	78.00	103.19		
13' 2	Short	54.00	79.00	104.00		
13' 2	Long	55.10	79.00	102.90		
13' 2	Oak Summit	53.56	79.00	104.44		
13' 4	Short	54.40	80.00	105.60		
13' 4	Long	54.90	80.00	105.10		
13' 4	Oak Summit	54.31	80.00	105.69		
13' 6	Short	55.40	81.00	106.60		
13' 6	Long	55.90	81.00	106.10		
13' 6	Oak Summit	55.06	81.00	106.94		
13' 8	Short	56.40	82.00	107.60		
13' 8	Long	56.63	82.00	107.38		
13' 8	Oak Summit	55.81	82.00	108.19		
13' 10	Short	57.16	83.00	108.71		
13' 10	Long	57.17	83.00	108.83		
13' 10	Oak Summit	56.56	83.00	109.44		
14' 0	Short	57.76	84.00	110.11		
14' 0	Long	58.63	84.00	109.38		
14' 0	Oak Summit	57.31	84.00	110.69		
14' 2	Short	58.85	85.00	111.41		
14' 2	Long	59.17	85.00	110.83		
14' 2	Oak Summit	58.06	85.00	111.94		
14' 4	Short	59.16	86.00	112.71		
14' 4	Long	60.17	86.00	111.83		
14' 4	Oak Summit	58.81	86.00	113.19		
14' 6	Short	59.86	87.00	114.01		
14' 6	Long	61.17	87.00	112.83		
14' 6	Oak Summit	59.56	87.00	114.44		
14' 8	Short	60.56	88.00	115.31		
14' 8	Long	44.81	88.00	109.59	131.19	
14' 8	Oak Summit	60.31	88.00	115.69		
14' 10	Short	61.26	89.00	116.61		
14' 10	Long	45.60	89.00	110.70	132.40	
14' 10	Oak Summit	61.06	89.00	116.94		
15' 0	Short	61.94	90.00	117.97	117.94	
15' 0	Long	46.60	90.00	111.70	133.40	
15' 0	Oak Summit	33.63	90.00	118.19	146.38	
15' 2	Short	62.66	91.00	119.11	119.21	
15' 2	Long	47.60	91.00	112.70	134.40	
15' 2	Oak Summit	34.13	91.00	119.44	147.88	
15' 4	Short	53.60	92.00	130.40		
15' 4	Long	47.25	92.00	114.38	136.75	
15' 4	Oak Summit	34.63	92.00	120.69	149.38	
15' 6	Short	46.62	93.00	116.19	139.38	
15' 6	Long	47.60	93.00	115.70	138.40	
15' 6	Oak Summit	47.42	93.00	115.79	138.58	
15' 8	Short	47.62	94.00	117.19	140.38	
15' 8	Long	48.60	94.00	116.70	139.40	
15' 8	Oak Summit	48.02	94.00	116.99	139.98	
15' 10	Short	48.62	95.00	118.19	141.38	
15' 10	Long	49.17	95.00	117.92	140.83	
15' 10	Oak Summit	48.62	95.00	118.19	141.38	
16' 0	Short	49.62	96.00	119.19	142.38	
16' 0	Long	50.60	96.00	118.70	141.40	
16' 0	Oak Summit	48.42	96.00	119.79	143.58	

^ Stiles do not need to be hinged

TABLE 2

Section	Panel Type	Max Design Loads Allowed	
		Positive (PSF)	Negative (PSF)
10' 0	Short	39.6	45.1
10' 0	Long	47.3	53.8
10' 0	Oak Summit	47.3	53.8
12' 0	Short	39.4	44.8
12' 0	Long	39.4	44.8
12' 0	Oak Summit	39.4	44.8
12' 2	Short	38.9	44.2
12' 2	Long	38.9	44.2
12' 2	Oak Summit	38.9	44.2
12' 4	Short	38.3	43.6
12' 4	Long	38.3	43.6
12' 4	Oak Summit	38.3	43.6
12' 6	Short	37.8	43.0
12' 6	Long	37.8	43.0
12' 6	Oak Summit	37.8	43.0
12' 8	Short	37.3	42.5
12' 8	Long	37.3	42.5
12' 8	Oak Summit	37.3	42.5
12' 10	Short	36.8	41.9
12' 10	Long	36.8	41.9
12' 10	Oak Summit	36.8	41.9
13' 0	Short	36.4	41.4
13' 0	Long	36.4	41.4
13' 0	Oak Summit	36.4	41.4
13' 2	Short	35.9	40.9
13' 2	Long	35.9	40.9
13' 2	Oak Summit	35.9	40.9
13' 4	Short	35.5	40.4
13' 4	Long	35.5	40.4
13' 4	Oak Summit	35.5	40.4
13' 6	Short	35.0	39.9
13' 6	Long	35.0	39.9
13' 6	Oak Summit	35.0	39.9
13' 8	Short	34.6	39.4
13' 8	Long	34.6	39.4
13' 8	Oak Summit	34.6	39.4
13' 10	Short	34.2	38.9
13' 10	Long	34.2	38.9
13' 10	Oak Summit	34.2	38.9
14' 0	Short	33.8	38.4
14' 0	Long	33.8	38.4
14' 0	Oak Summit	33.8	38.4
14' 2	Short	33.4	38.0
14' 2	Long	33.4	38.0
14' 2	Oak Summit	33.4	38.0
14' 4	Short	33.0	37.5
14' 4	Long	33.0	37.5
14' 4	Oak Summit	33.0	37.5
14' 6	Short	32.6	37.1
14' 6	Long	32.6	37.1
14' 6	Oak Summit	32.6	37.1
14' 8	Short	32.2	36.7
14' 8	Long	32.2	36.7
14' 8	Oak Summit	32.2	36.7
14' 10	Short	31.9	36.3
14' 10	Long	31.9	36.3
14' 10	Oak Summit	31.9	36.3
15' 0	Short	31.5	35.9
15' 0	Long	31.5	35.9
15' 0	Oak Summit	31.5	35.9
15' 2	Short	31.2	35.5
15' 2	Long	31.2	35.5
15' 2	Oak Summit	31.2	35.5
15' 4	Short	30.8	35.1
15' 4	Long	30.8	35.1
15' 4	Oak Summit	30.8	35.1
15' 6	Short	30.5	34.7
15' 6	Long	30.5	34.7
15' 6	Oak Summit	30.5	34.7
15' 8	Short	30.2	34.3
15' 8	Long	30.2	34.3
15' 8	Oak Summit	30.2	34.3
15' 10	Short	29.9	34.0
15' 10	Long	29.9	34.0
15' 10	Oak Summit	29.9	34.0
16' 0	Short	29.7	33.8
16' 0	Long	29.7	33.8
16' 0	Oak Summit	29.7	33.8

TABLE 3

DOOR HEIGHT	SECTION HEIGHTS							
	Btm	#2	#3	#4	#5	#6	#7	#8
14' 0"	21"	21"	21"	21"	21"	21"	21"	21"
13' 6"	21"	21"	21"	21"	21"	18"	18"	21"
13' 0"	21"	21"	21"	18"	18"	18"	18"	21"
12' 6"	21"	18"	18"	18"	18"	18"	18"	21"
12' 0"	21"	21"	21"	21"	21"	18"	21"	
11' 6"	21"	21"	21"	18"	18"	18"	21"	
11' 0"	21"	18"	18"	18"	18"	18"	21"	
10' 6"	21"	21"	21"	21"	21"	21"		
10' 0"	21"	21"	21"	18"	18"	21"		
9'6"	21"	18"	18"	18"	18"	21"		
9' 0"	18"	18"	18"	18"	18"	18"		
8' 6"	21"	21"	21"	18"	21"			
8' 0"	21"	18"	18"	18"	21"			
7' 6"	18"	18"	18"	18"	18"			
7' 0"	21"	21"	21"	21"				
6' 6"	21"	18"	18"	21"				

TABLE 4

DOOR HEIGHT	TRACK ATTACHMENT								SPLICE S
	A	B	C	D	E	F	G	H	
6' 6"	10"	22"	46"	58"					70"
7'	10"	22"	46"	58"					76"
7' 6"	10"	22"	46"	58"					82"
8'	10"	22"	46"	58"					88"
8' 6"	10"	22"	46"	58"	82"				94"
9'	10"	22"	46"	58"	82"				100"
9' 6"	10"	22"	46"	58"	82"				106"
10'	10"	22"	46"	58"	82"	94"			112"
10' 6"	10"	22"	46"	58"	82"	94"			118"
11'	10"	22"	46"	58"	82"	94"			124"
11' 6"	10"	22"	46"	58"	82"	94"	118"		130"
12'	10"	22"	46"	58"	82"	94"	118"		136"
12'6"	10"	22"	46"	58"	82"	94"	118"		142"
13'	10"	22"	46"	58"	82"	94"	118"	130"	148"
13' 6"	10"	22"	46"	58"	82"	94"	118"	130"	154"
14'	10"	22"	46"	58"	82"	94"	118"	130"	160"

ALL TRACK ATTACHMENT SPACING +/-2" ALLOWED WITH SYP NO. 2 OR BETTER

REV	DESCRIPTION OF REVISIONS	DATE	BY
A	UPDATED BOTTOM BRACKET INFORMATION ADDED OAKSUMMIT AND GLAZING OPTIONS	07/12/05	DLJ
B	REVISED NOTE 6	09/02/08	DLJ
C	REMOVED TABLES 4-5, NOTE 7.	05/20/09	CBT
E	WIND SPEED TABLE & TRACK CONFIGURATIONS	04/20/12	RJR
F	ADDED LONG PANEL GLAZING OPTION	08/10/15	RS

MAX SIZE
16' WIDTH
14' HEIGHT
(DOOR HEIGHT
SUBJECT TO
WEIGHT LIMITATIONS)

DESIGN LOADS
+29.7 PSF
-33.8 PSF

TEST LOADS
+44.6 PSF
-50.7 PSF

THOMAS L. SHELMEYER
LICENSE
No. 48579
STATE OF
FLORIDA
PROFESSIONAL ENGINEER
FL

Thomas L. Shelmerdine, PE (FL PE #0048579)
Structural Solutions, PA (FL Firm #29412)

dba Structural Solutions of North Carolina, Inc.
5921-G W. Friendly Ave., Greensboro, NC 27410

Amarr

MODEL #650 AMARR OAK SUMMIT 1000, 2000
MODEL #600 AMARR STRATFORD 1000, 2000
MODEL #950 AMARR HERITAGE 1000, 2000
Short, Long, Flush & Oak Summit Panel's

SIZE	DRAWN BY	DLJ	DATE	08/13/03	DRAWING NUMBER IRC-6016-140-24
B	CHECKED BY	AAE	DATE	08/13/03	
ENTREPRENEUR 165 CARRIAGE COURT WINSTON-SALEM, N.C. 27105					SHEET 3 OF 3