

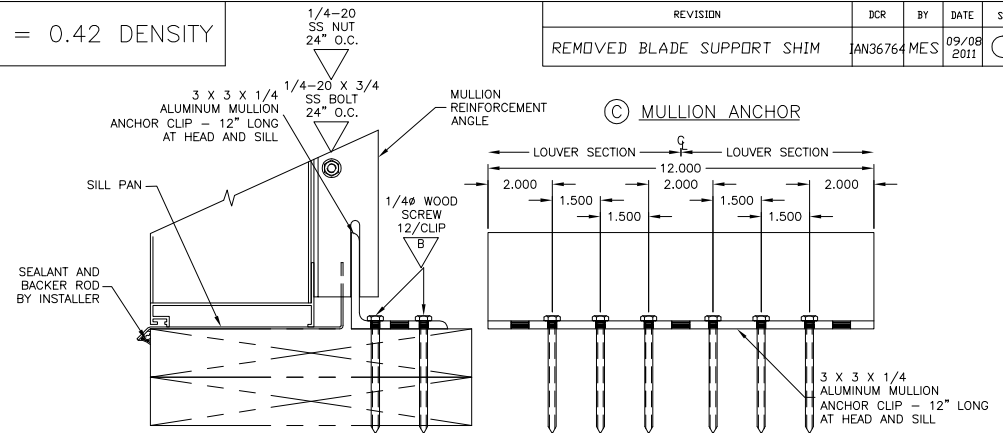
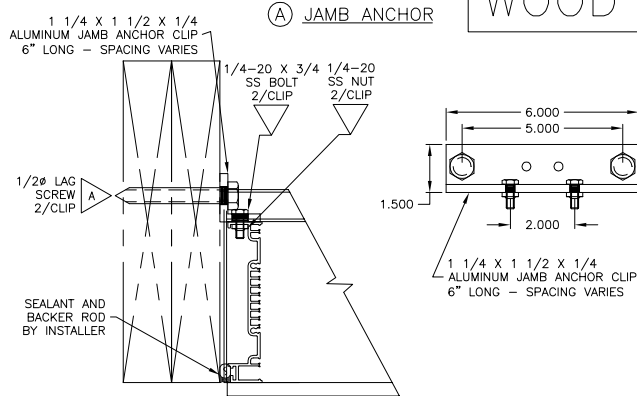


WOOD OPENING MINIMUM G = 0.42 DENSITY

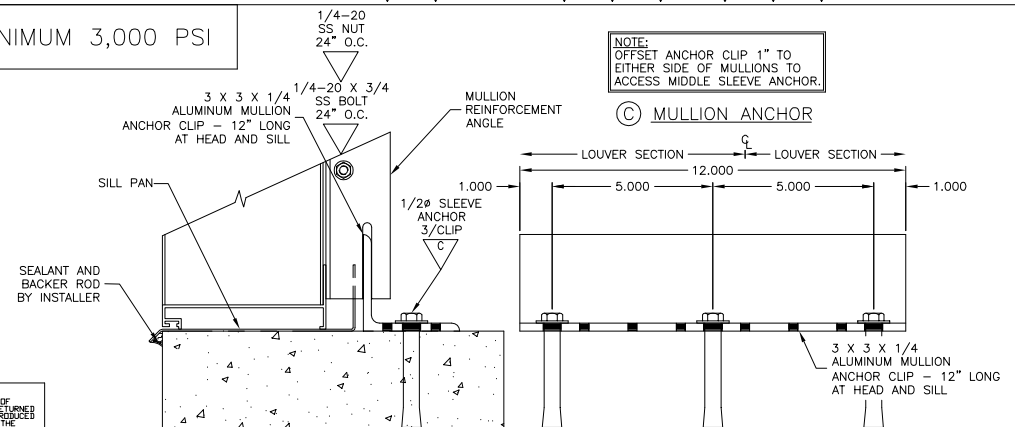

MASONRY OPENING MINIMUM 3,000 PSI



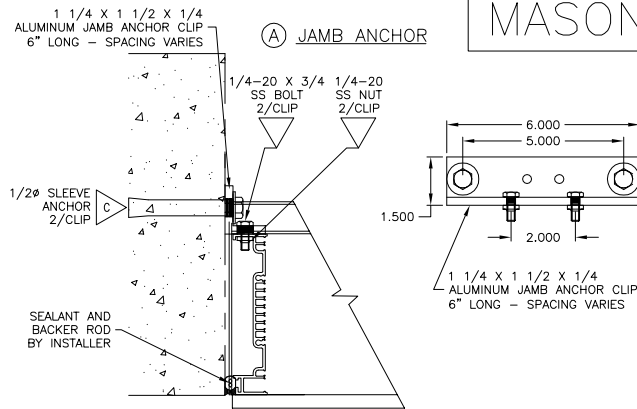


PROPRIETARY INFORMATION NOTICE:
THIS DOCUMENT IS AND CONTAINS CONFIDENTIAL TRADE SECRET INFORMATION OF THE COMPANY AND REMAINS THE PROPERTY OF THE COMPANY AND IS TO BE RETURNED UPON REQUEST. NEITHER IT NOR THE INFORMATION IT CONTAINS MAY BE REPRODUCED OR DISCLOSED TO PERSONS NOT HAVING A NEED-TO-KNOW CONSISTENT WITH THE PURPOSE OF LOAN OF THE DOCUMENT WITHOUT WRITTEN PERMISSION.


W/O SUPPORT ANGLE

W/ SUPPORT ANGLE

MULTIPLE SECTION W/ MULLION

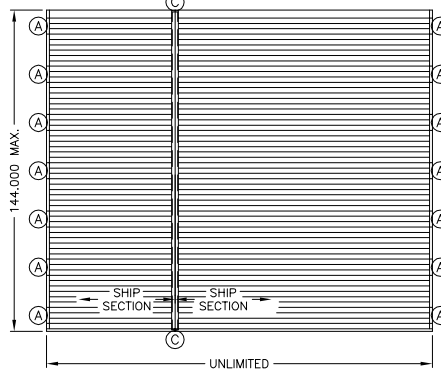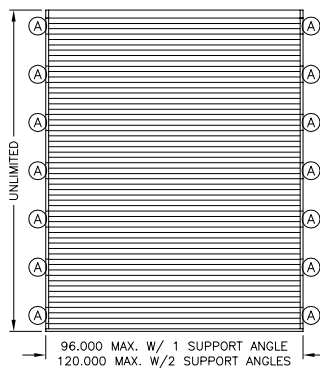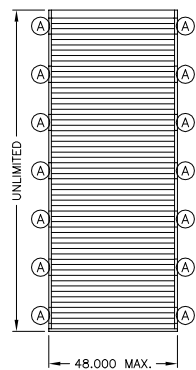

AVAILABLE SHAPES

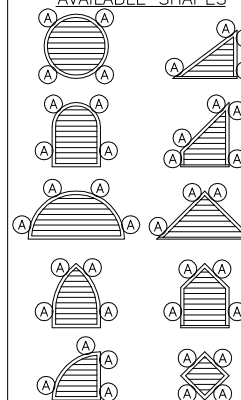

FIELD FASTENER SCHEDULE (BY INSTALLER)

TYPE	DESCRIPTION	MIN. EMBED.	MIN. EDGE DIST.	MIN. SPACING
A	1/2" Ø LAG SCREW	3"	2 1/2"	3"
B	1/4" WOOD SCREW	3"	1/2"	1 1/2"
C	1/2" SLEEVE ANCHOR	3" - CONCRETE	3"	5"
C	1/2" SLEEVE ANCHOR	1 1/2" - BLOCK	3"	5"
D	1/4" SLEEVE ANCHOR	1 1/2"	1 1/2"	2 1/2"

INSTALLER TO PROVIDE SEPARATION OF DISSIMILAR MATERIALS AS REQUIRED

FIELD INSTRUCTIONS

PAIN'T	PART NO.	MAT'L	GAUGE	DESCRIPTION	
 AIROLITE The look that works.™				DRAWN BY STEELE	ECC IAN16718
TITLE SCH501X INSTALLATION DETAILS1 OF 2				DATE 09/08/2011	ENG. REF. SCH501X
				SUPERSEDES	
				SCALE 1/1	
				CAB DRAWING NO. B	
				D148876	

