


YKK AP AMERICA RESIDENTIAL
STYLEVIEW CLASSIC SINGLE HUNG ARCHTOP WINDOW
(NON-HVHZ) (NON-IMPACT)

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
- AAMA/WDMA/CSA 101/I.S.2/A440-22
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING AND METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
5. APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. WINDOW FRAME MATERIAL: PVC
7. DESIGNATIONS "X" AND "O" STAND FOR THE FOLLOWING:
X: OPERABLE VENT
O: FIXED VENT
8. GLAZING SHALL MEET ASTM E1300 REQUIREMENTS, SEE SHEET 1 FOR GLAZING DETAIL.

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	GENERAL NOTES & GLAZING DETAIL
2	ELEVATIONS & ANCHOR LAYOUTS
3	VERTICAL SECTIONS & REINFORCEMENT TABLE
4	HORIZONTAL SECTIONS
5	INSTALLATION NOTES, ANCHOR DETAILS, & ANCHOR SCHEDULE

DESIGN PRESSURE TABLE								
UNIT	MAX. FRAME SIZE		MAX. D.L.O.		DESIGN PRESSURE	CONFIGURATION	INSTALLATION METHOD	IMPACT RATING
	WIDTH	HEIGHT	WIDTH	HEIGHT				
1	35 1/2"	87 1/2"	29 11/32"	40 1/16"	+35/-35 PSF	"O/X"	NAIL FIN	NOT RATED
2	47 1/2"	83 1/2"	41 11/32"	38 1/16"	+35/-35 PSF	"O/X"	NAIL FIN	NOT RATED

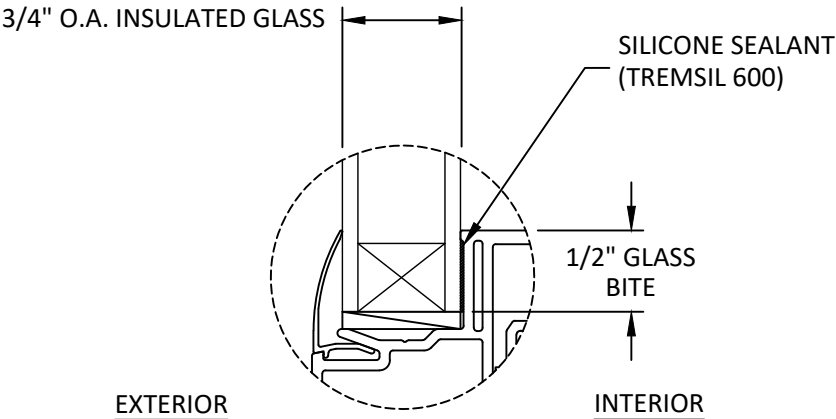

GLAZING DETAIL 1

GLAZING NOTES:

1. GLASS TYPE SHALL COMPLY WITH ASTM E1300 REQUIREMENTS. TEMPER AND SAFETY GLAZING REQUIREMENTS SHALL BE REVIEWED ON A SITE SPECIFIC BASIS.
2. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
3. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
4. D.L.O. AND DESIGN PRESSURES MAY NOT EXCEED MAX VALUES SHOWN HEREIN.

YKK

ap

Quality
inspires™

YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000

TITLE: STYLEVIEW CLASSIC SINGLE HUNG ARCHTOP WINDOW (NON-HVHZ) (NON-IMPACT)

GENERAL NOTES & GLAZING DETAIL

PREPARED BY:

BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com


B.D.

BUILDING DROPS

REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26
2026 CODE UPDATE	SH	08.04.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2026.09.01 11:54:11 -0400

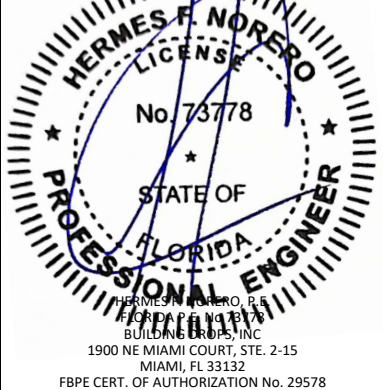

FL #:

FL8114

DATE:

11.27.23

DWG. BY:

SH

CHK. BY:

HFN

SCALE:

NTS

DWG. #:

YKK291

SHEET:


1

REV.


B

OF 5


8/4/2026 6:47 PM

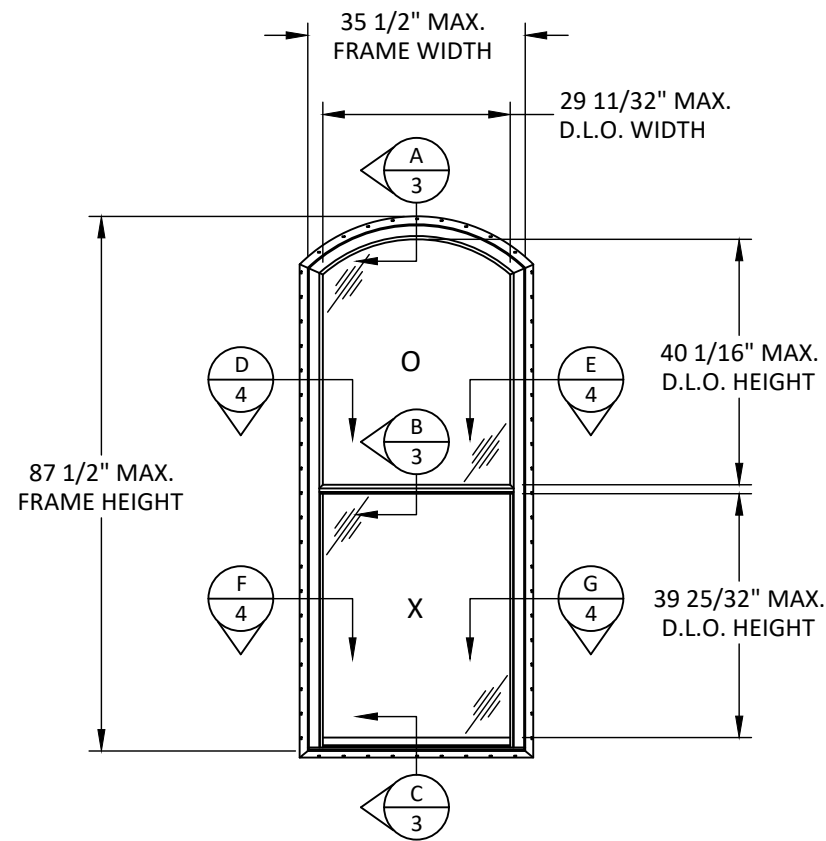


**ELEVATION
TYPICAL**

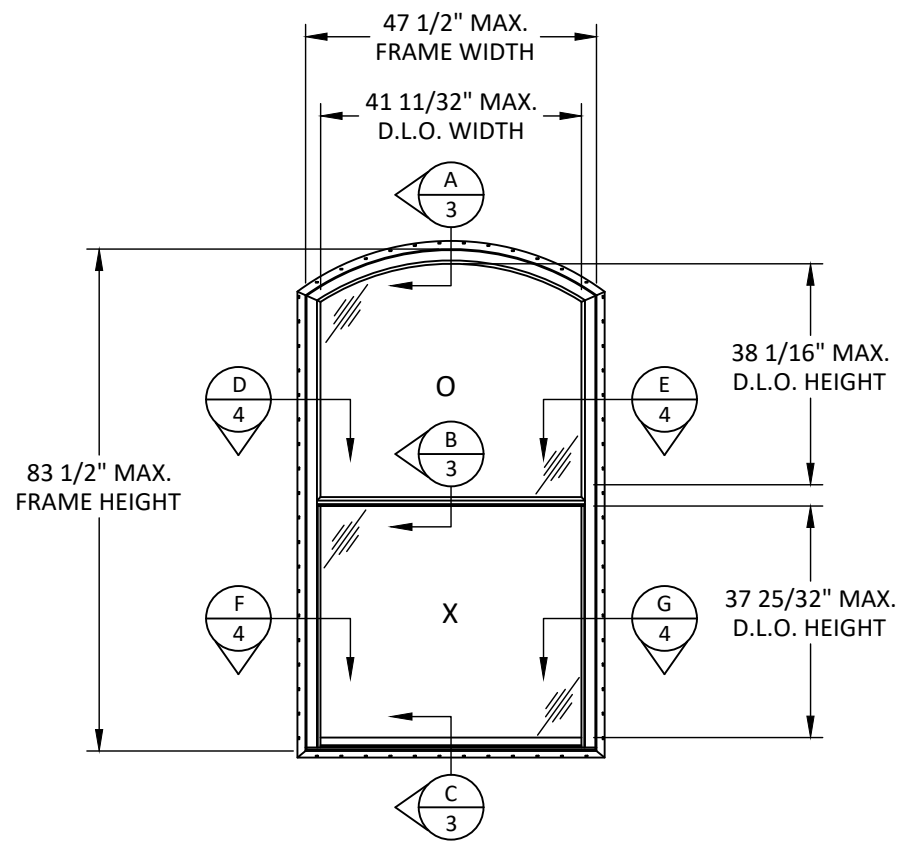

**ELEVATION
TYPICAL**

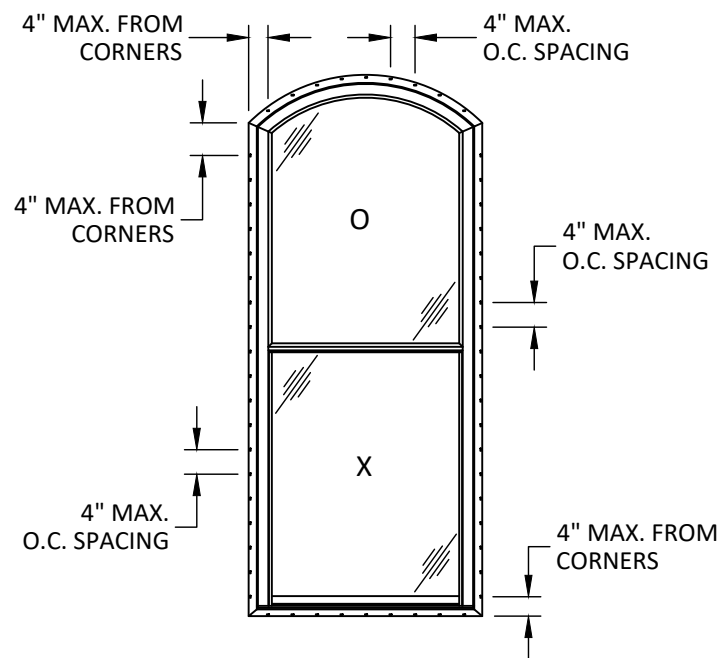

**ANCHOR LAYOUT
NAILING FIN**

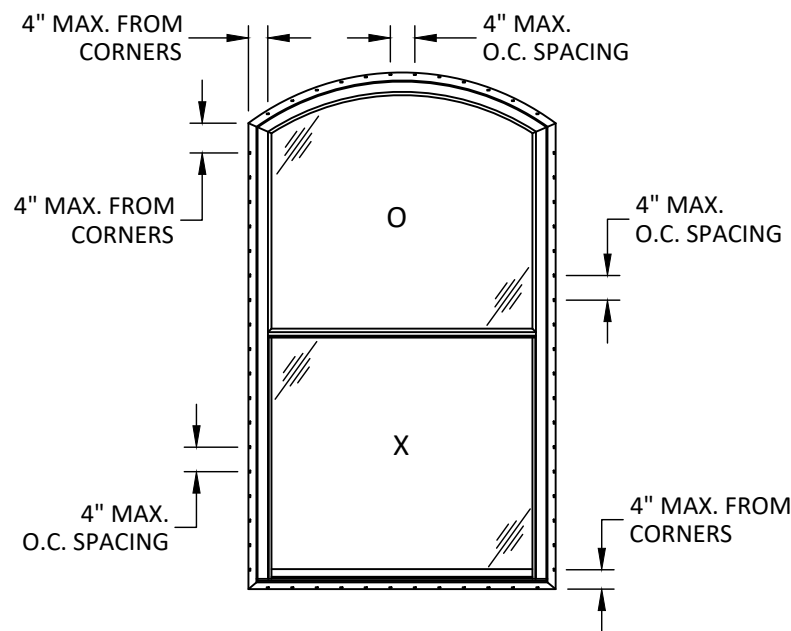

**ANCHOR LAYOUT
NAILING FIN**



YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000

TITLE: STYLEVIEW CLASSIC SINGLE
HUNG ARCHTOP WINDOW
(NON-HVHZ) (NON-IMPACT)

ELEVATIONS & ANCHOR LAYOUTS


PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26
2026 CODE UPDATE	SH	08.04.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

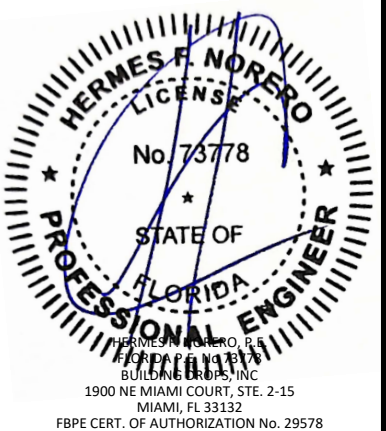


FL #:	FL8114	
DATE:	11.27.23	
DWG. BY:	SH	CHK. BY: HFN
SCALE:	NTS	
DWG. #:	YKK291	
SHEET:	2	REV. B
OF 5		


c:\users\sebastianherrerros\desktop\Ykk res 2026 cc\18114\Ykk 291.dwg 8/4/2026 6:47 PM

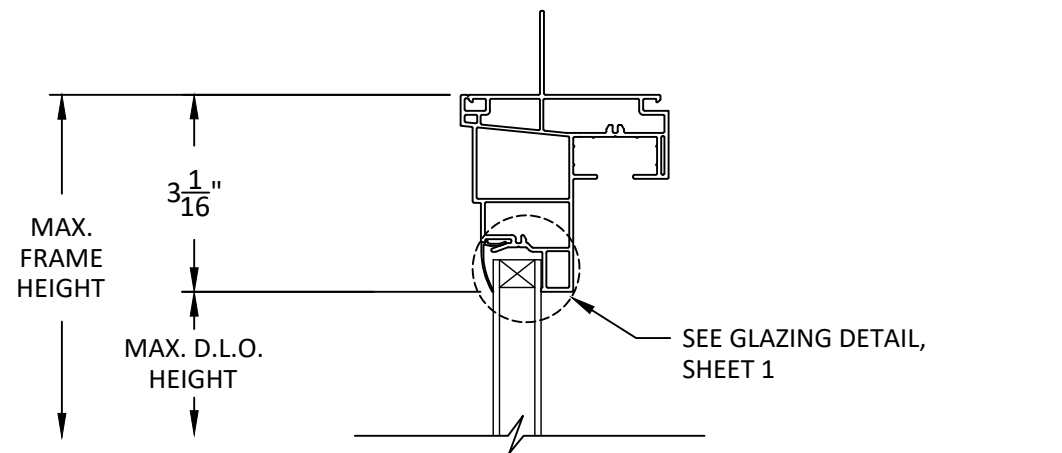

A
3 VERTICAL SECTION
HEAD

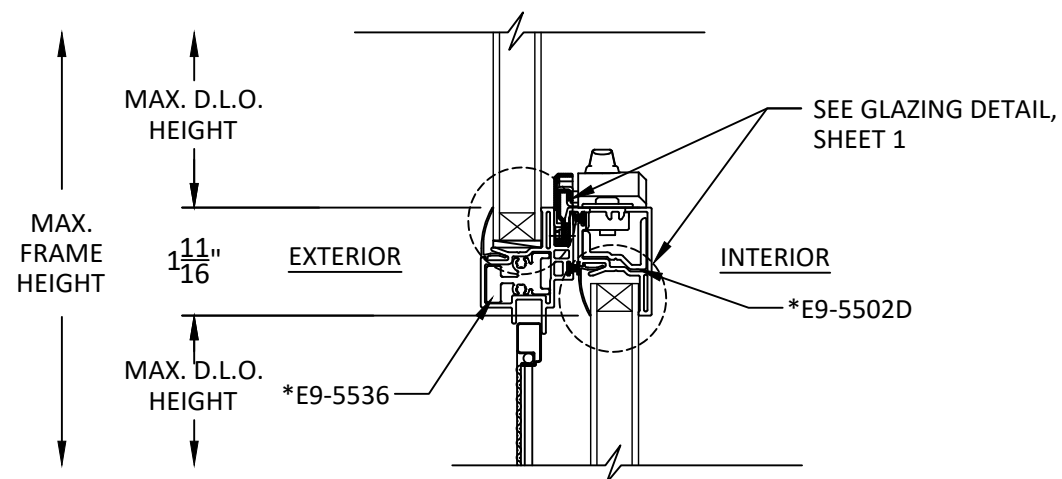

B
3 VERTICAL SECTION
INTERLOCK RAIL

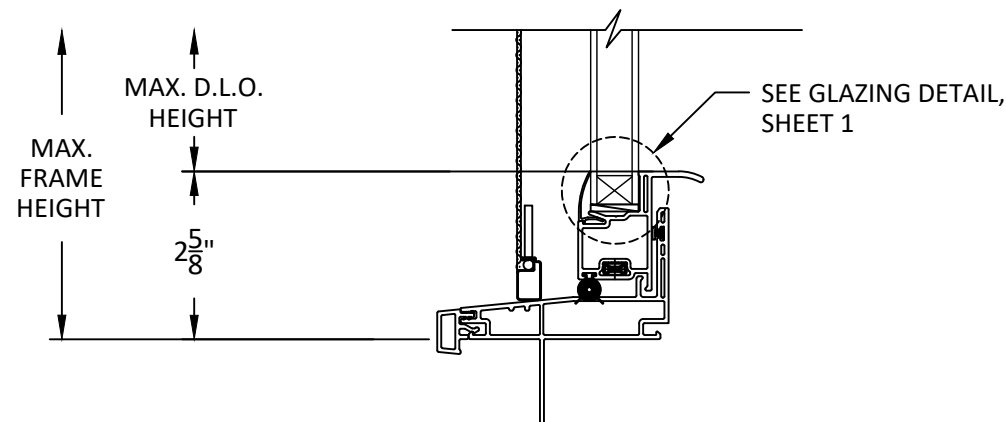

C
3 VERTICAL SECTION
SILL

REINFORCEMENT SCHEDULE		
UNIT	LOCATION	REINFORCEMENT PART#
1	MEETING RAIL (TOP VENT)	E9-5536
	MEETING RAIL (BOTTOM VENT)	E9-5502D
	STILE (BOTTOM VENT)	E9-5502D
2	MEETING RAIL (TOP VENT)	E9-5536
	MEETING RAIL (BOTTOM VENT)	E9-5502D
	STILE (BOTTOM VENT)	E9-5502D



YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000


TITLE: STYLEVIEW CLASSIC SINGLE HUNG ARCHTOP WINDOW (NON-HVHZ) (NON-IMPACT)
VERTICAL SECTIONS & REINFORCEMENT TABLE

PREPARED BY: BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26
2026 CODE UPDATE	SH	08.04.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

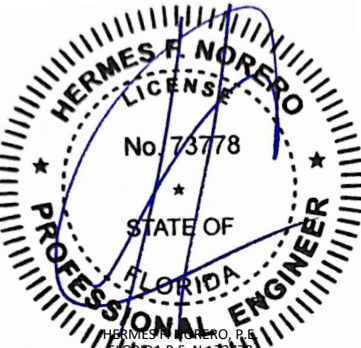

HERMES F. NORERO, P.E.
BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:

FL8114

DATE: **11.27.23**

DWG. BY:

SH

CHK. BY:

HFN

SCALE: **NTS**

DWG. #: **YKK291**

SHEET:

3


REV.

B


OF 5

8/4/2026 6:47 PM

c:\users\sebastianherrerros\desktop\ykk res 2026 cc\8114\ykk291.dwg

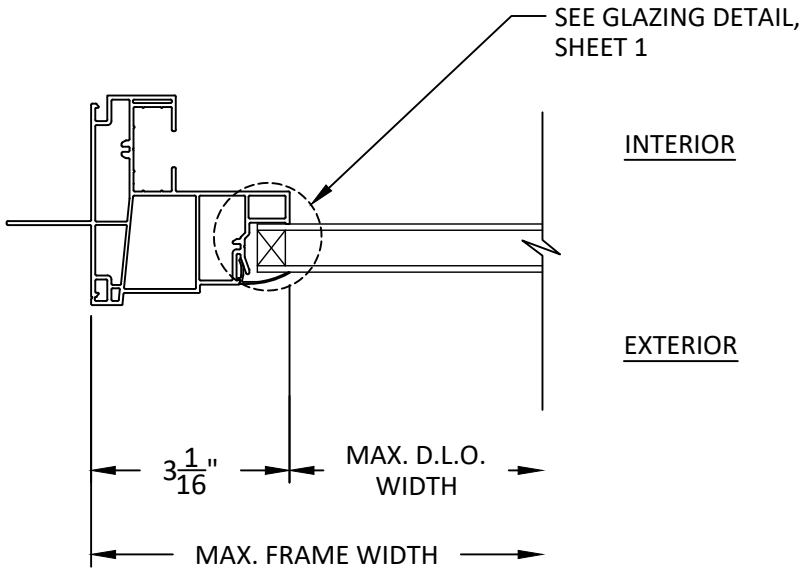


D
4 **HORIZONTAL SECTION**
FIXED JAMB

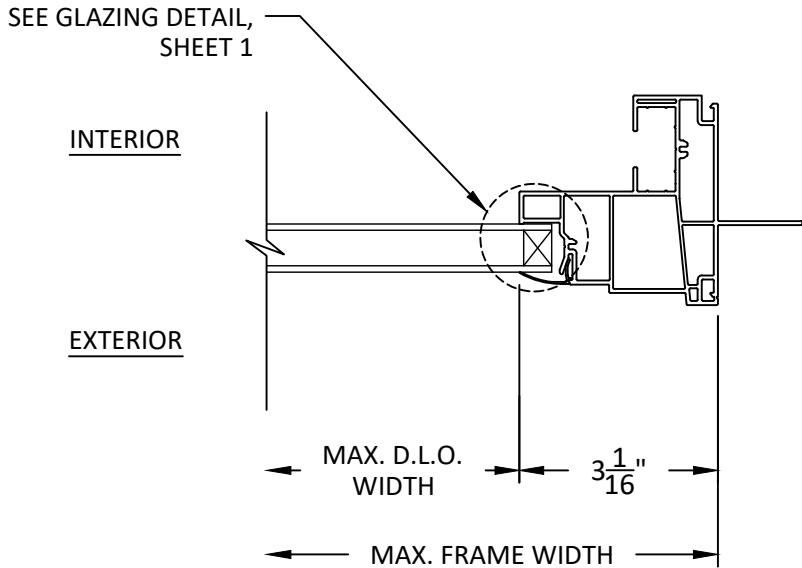


E
4 **HORIZONTAL SECTION**
FIXED JAMB

*NOTE: SEE SHEET 3 FOR
REINFORCEMENT TABLE.

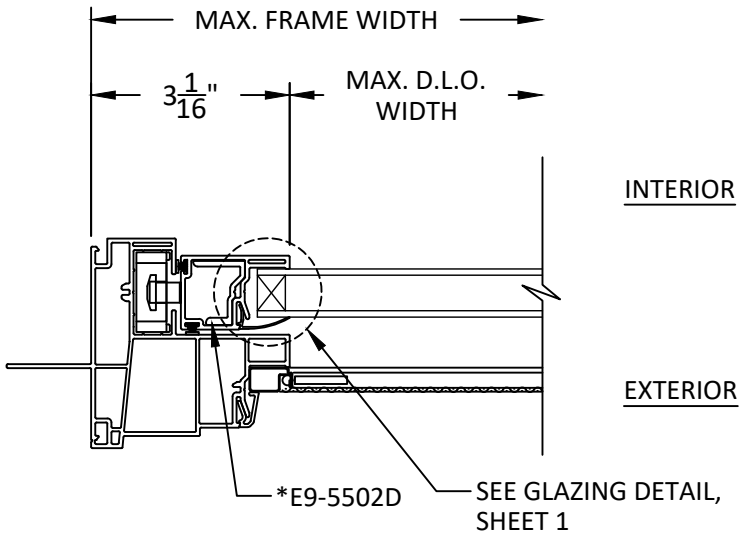

F
4 **HORIZONTAL SECTION**
VENT JAMB

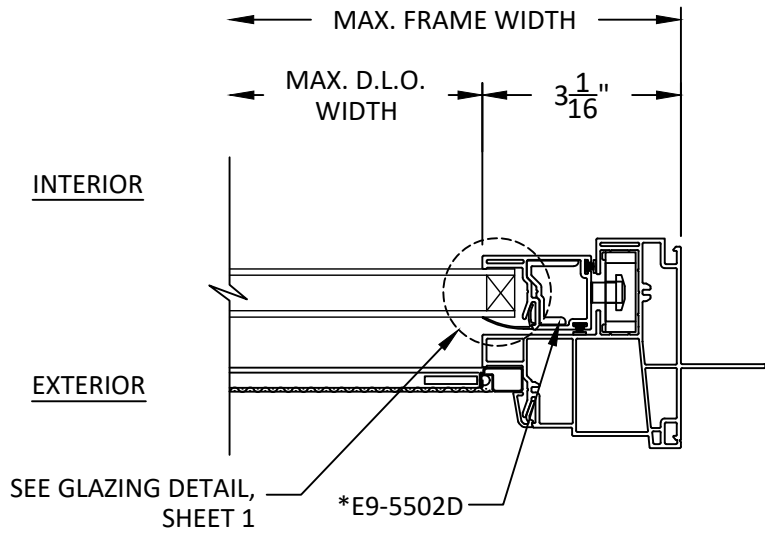

G
4 **HORIZONTAL SECTION**
VENT JAMB



YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000

TITLE: STYLEVIEW CLASSIC SINGLE
HUNG ARCHTOP WINDOW
(NON-HVHZ) (NON-IMPACT)


HORIZONTAL SECTIONS

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26
2026 CODE UPDATE	SH	08.04.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT.

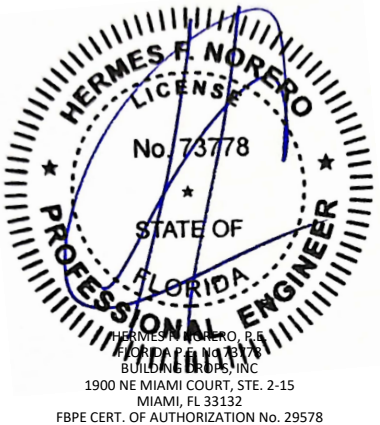


FL #:	FL8114
DATE:	11.27.23
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK291
SHEET:	4
REV.	B
OF 5	


c:\users\sebastianherrerero\desktop\ykk res 2026 cc\18114\ykk291.dwg 8/4/2026 6:47 PM

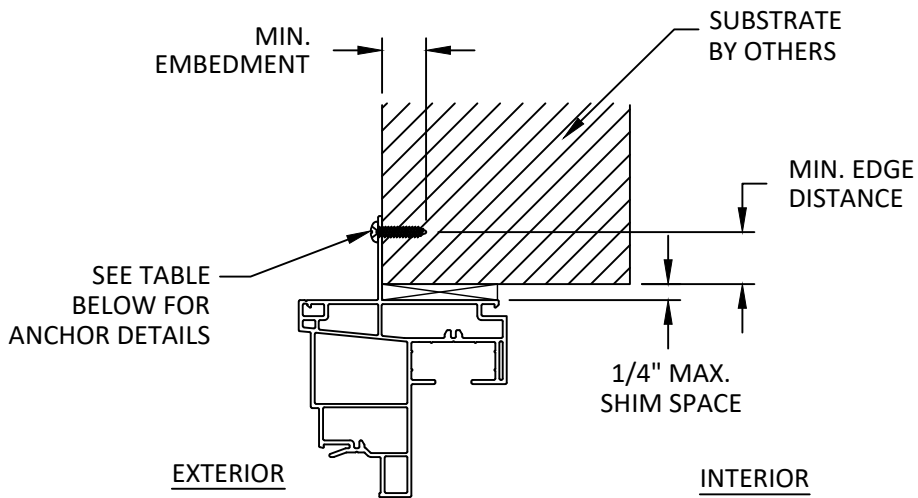

A
5 **VERTICAL SECTION**
HEAD INSTALLATION

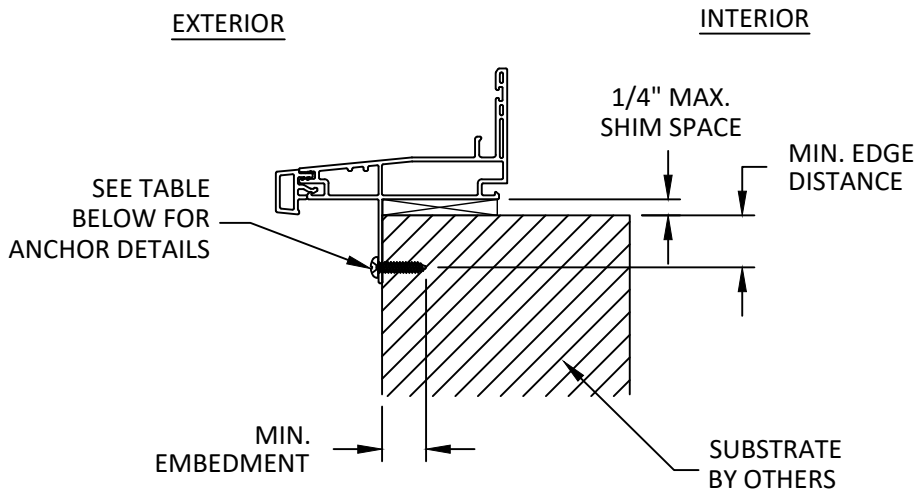

B
5 **VERTICAL SECTION**
SILL INSTALLATION

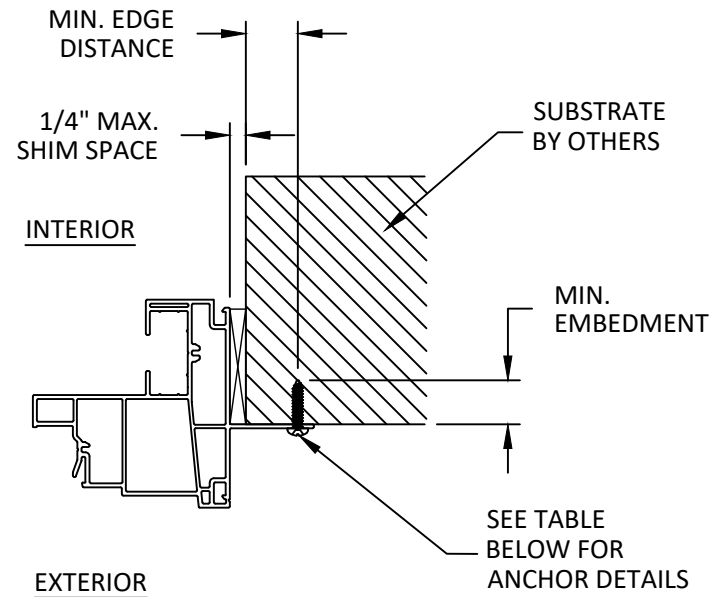

C
5 **HORIZONTAL SECTION**
JAMB INSTALLATION

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN, UNLESS OTHERWISE STATED ON SHEETS 2.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF $\pm 1/2$ INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- SHIM AS REQUIRED IN ORDER TO ACHIEVE SQUARE AND PLUMB INSTALLATION WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
 - FASTENERS USED WITHIN 3,000 FEET OF A SALTWATER COASTLINE AND INSTALLED IN ENCLOSED SPACES SHALL BE GALVANIZED IN ACCORDANCE WITH SECTION 1711.1.1 (E.G., ASTM A153 CLASS D, ASTM A641 CLASS 3S, OR EQUIVALENT CORROSION RESISTANCE).
 - CONNECTORS AND METAL PLATES USED WITHIN 3,000 FEET OF A SALTWATER COASTLINE SHALL BE STANDARD GALVANIZED IN ACCORDANCE WITH SECTION 1711.1.2 (E.G., ASTM A653 G90, ASTM A123, OR PROTECTIVE COATING PER TPI 1).
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

ANCHOR SCHEDULE				
METHOD	SUBSTRATE	ANCHOR SCHEDULE	MIN. EMBEDMENT	MIN. EDGE DISTANCE
NAIL-FIN	WOOD: MIN. SG = 0.55	#10 WOOD SCREW	1.50"	0.75"
	METAL: 18 GAUGE STEEL, MIN. Fy = 33KSI ALUMINUM: 1/8" MIN., 6063-T5	#10 SELF-DRILLING SCREW	3 THREADS MIN PENETRATION BEYOND STRUCTURE	0.50"



Quality
inspires™

YKK AP AMERICA RESIDENTIAL
101 MARIETTA STREET NW, SUITE 2100
ATLANTA, GA 30303
PH: (678) 838-6000

TITLE: **STYLEVIEW CLASSIC SINGLE HUNG ARCHTOP WINDOW (NON-HVHZ) (NON-IMPACT)**

INSTALLATION NOTES, ANCHOR DETAILS, & ANCHOR SCHEDULE


PREPARED BY:

BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
REINFORCEMENT REV.	LS	05.27.26
2026 CODE UPDATE	SH	08.04.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

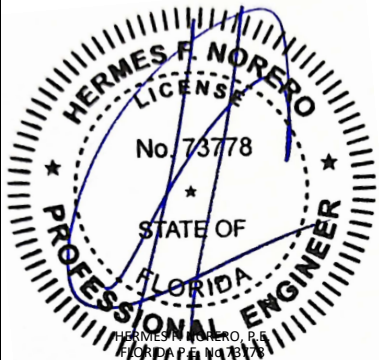

HERMES F. NORERO, P.E.
BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:
FL8114

DATE: **11.27.23**

DWG. BY:
SH

CHK. BY:
HFN

SCALE: **NTS**

DWG. #: **YKK291**

SHEET:
5

REV.
B

OF 5