


4½ x 4 - 4½ x 4½
STANDARD WEIGHT, *QC HINGE (10 to 12 WIRES)



DO NOT SCALE

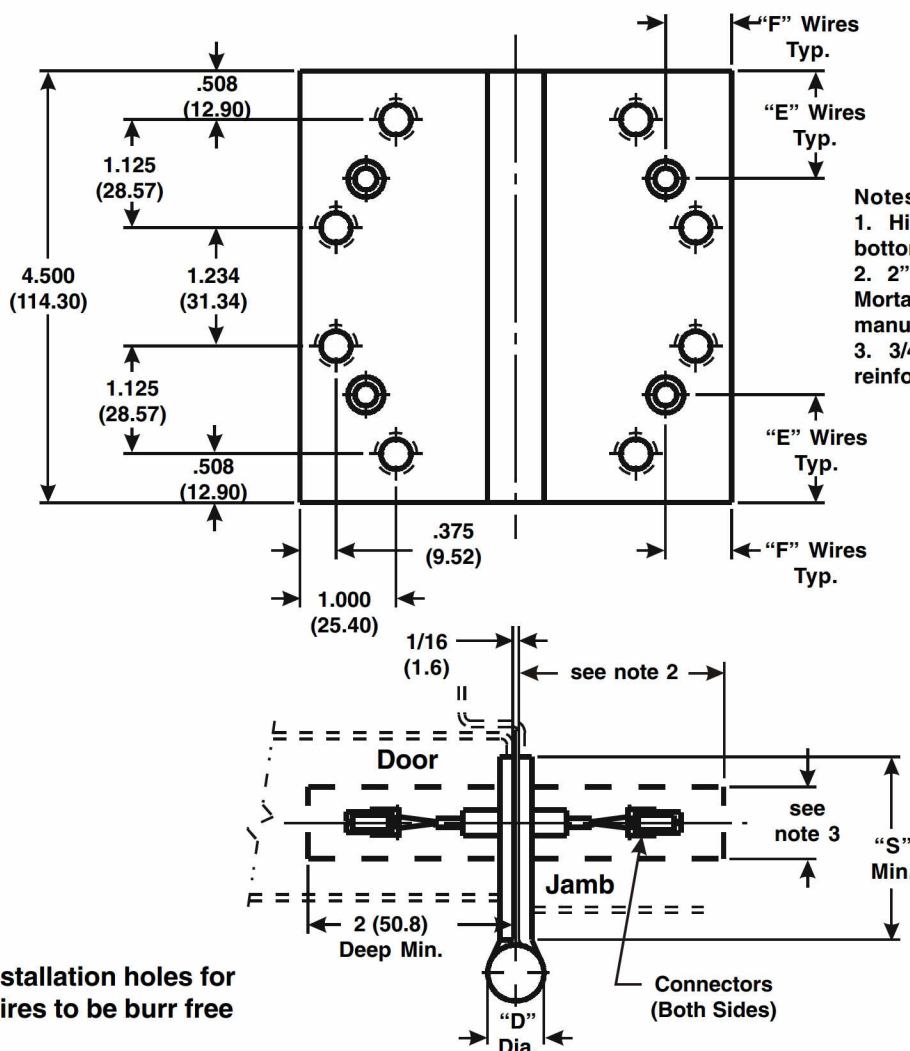

Installation holes for wires to be burr free

CATALOG NUMBER		GAUGE OF METAL	"D" OUTSIDE DIAMETER	"E" WIRE LOCATION	"F" WIRE LOCATION	"S" DISTANCE (SWAGE LINE)	
STEEL HINGES	**NON-FERROUS HINGES					HINGE WIDTH	
						4 (101.6)	4½ (114.3)
TA 714xQC	TA 314xQC	.134 (3.40)	.585 (14.86)	1.125 (28.57)	.812 (20.64)	1-21/32 (42.1)	1-29/32 (48.4)
TA 786xQC	TA 386xQC	.180 (4.57)	.720 (18.29)	1.125 (28.57)	.812 (20.64)	-	1-13/16 (46.0)
TA/TB 2714xQC	TA/TB 2314xQC	.134 (3.40)	.585 (14.86)	1.125 (28.57)	.688 (17.47)	1-21/32 (42.1)	1-29/32 (48.4)
TA/TB 3713xQC	TA/TB 3313xQC	.134 (3.40)	.585 (14.86)	1.125 (28.57)	.688 (17.47)	1-21/32 (42.1)	1-29/32 (48.4)
T4A/T4B 3786xQC	T4A/T4B 3386xQC	.180 (4.57)	.752 (19.10)	1.062 (26.98)	.750 (19.05)	-	1-13/16 (46.0)

McKINNEY Template Hinges of the above Catalog Numbers are made to conform to ANSI/BHMA 156.7 for Screw hole Location and Gauge of Metal. Wire location and hole size conforms to this drawing.

Machine Screw Size - 1/2 x 12-24 F.H.

Wood Screw Size - 1-1/4 x 12 F. H.

*Connector System utilizes wire colors & locations compatible with Doors & Hardware from other ASSA ABLOY Group Companies.

**Check Catalog for Metals.

McKINNEY Products Company

Manufacturer reserves the right to make changes without formal notice.