


5 x 4½ - 5 x 5 TEMPLATE FULL MORTISE CONCEALED CIRCUIT HINGES

DO NOT SCALE

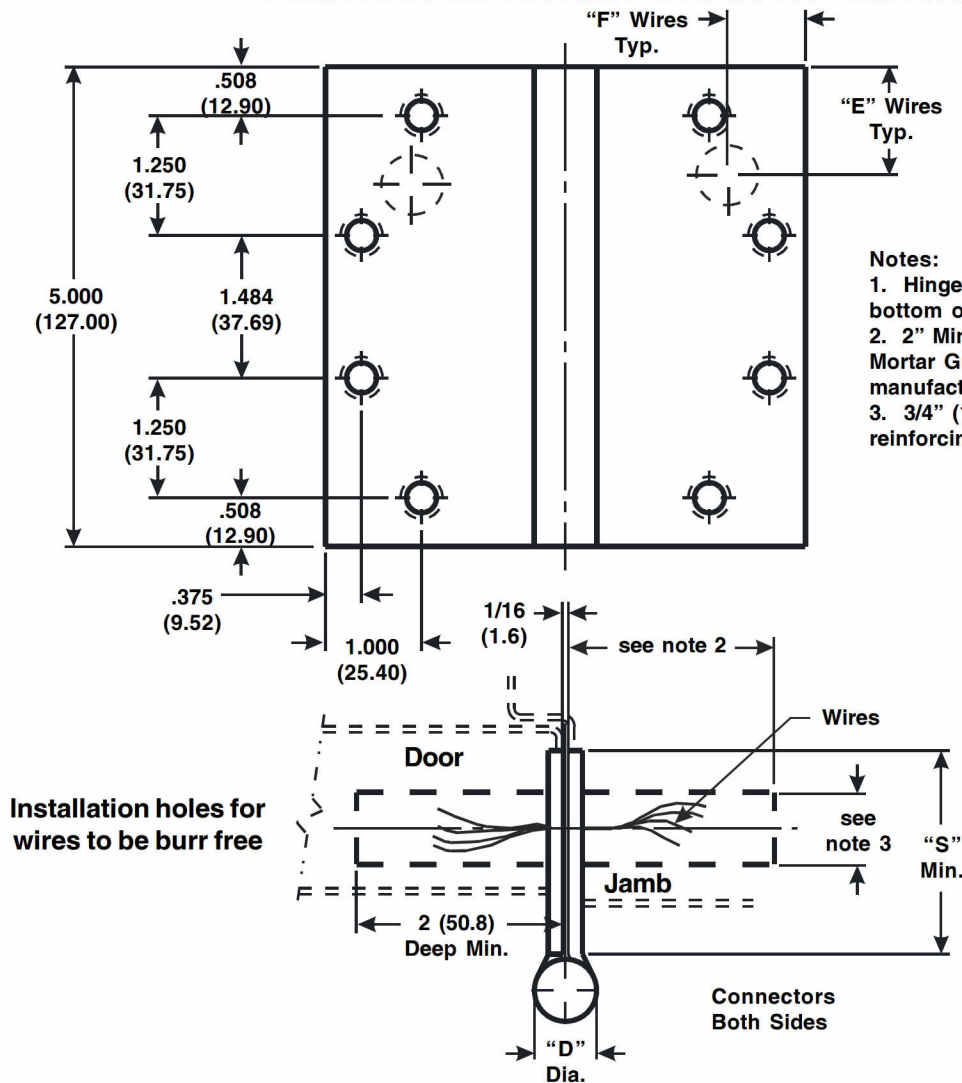

Bottom view (Hinge in closed position)

CATALOG NUMBER		GAUGE OF METAL	"D" OUTSIDE DIAMETER	"E" WIRE LOCATION	"F" WIRE LOCATION	"S" DISTANCE (SWAGE LINE)	
STEEL HINGES	*NON-FERROUS HINGES					HINGE WIDTH	
						4½ (114.3)	5 (127.0)
TA 714xCC	TA 314xCC	.146 (3.71)	.648 (16.46)	1.125 (28.57)	.812 (20.62)	1-7/8 (47.6)	2-1/8 (53.9)
TA 786xCC	TA 386xCC	.190 (4.83)	.752 (19.10)	1.125 (28.57)	.812 (20.62)	1-53/64 (46.4)	2-5/64 (52.8)
TA/TB 2714xCC	TA/TB 2314xCC	.146 (3.71)	.648 (16.46)	1.125 (28.57)	.812 (20.62)	1-7/8 (47.6)	2-1/8 (53.9)
TA/TB 3713xCC	TA/TB 3313xCC	.146 (4.83)	.648 (16.46)	1.125 (28.57)	.812 (20.62)	1-7/8 (47.6)	2-1/8 (53.9)
T4A/T4B 3786xCC	T4A/T4B 3386xCC	.190 (4.83)	.752 (19.10)	1.062 (26.96)	.750 (19.03)	1-53/64 (46.4)	2-5/64 (52.8)

McKINNEY Template Hinges of the above Catalog Numbers are made to conform to ANSI/BHMA 156.7 for Screw hole Location and Gauge of Metal. Wire location and hole size conforms to this drawing.

Machine Screw Size - 1/2 x 12-24 F.H.

Wood Screw Size - 1-1/4 x 12 F. H.

*Check Catalog for Metals.

McKINNEY Products Company

Manufacturer reserves the right to make changes without formal notice.