



398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Product Evaluation Report

of

Croft, LLC

**Series 4400/4440 Single Hung Window
(Non-HVHZ) (Non-Impact)**

for

Florida Product Approval

FL# FL10853

Report No. 7718

Current Florida Building Code


Method:	1 – A (Certificate)
Category:	Windows
Sub – Category:	Single Hung
Product:	Series 4400/4440 Single Hung Window
Materials:	Aluminum 6063-T5
Product Dimensions:	See Installation Instructions, CRF026

Prepared for:

**Croft, LLC
P.O. Box 826
McComb, MS. 39649**

Prepared by:

Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 9/13/2021

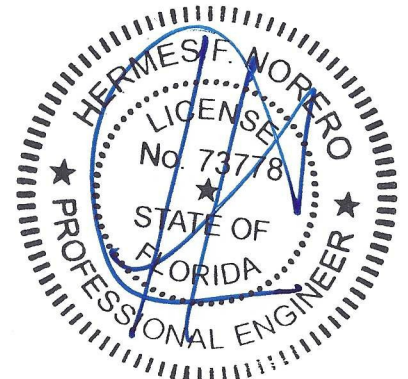

Contents:

Evaluation Report Pages 1 – 3

Hermes F. Norero, P.E.
Florida P.E. No. 73778

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Manufacturer: Croft, LLC

Product Category: Windows

Product Sub-Category: Single Hung

Compliance Method: State Product Approval Method (1)(a)

Product Name: **Series 4400/4440 Single Hung Window (Non-HVHZ) (Non-Impact)**

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) **Croft, LLC** based on Method 1a of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **CRF026**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **excluding** the “High Velocity Hurricane Zone” (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does require** an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **CRF026** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **CRF026** for size and design pressure limitations.

Certification Agency: The manufacturer has demonstrated compliance of manufacture of products in accordance with the Florida Building Code for manufacturing under an approved certification agency through **Fenestration and Glazing Industry Alliance (formerly AAMA)** (FBC Organization # CER1498).

Performance Standards: The product described herein has been evaluated per:

- AAMA/WDMA/CSA 101/I.S.2/A440-11

Referenced Data:

1. Product Testing performed by **Architectural Testing, Inc.** (FBC Organization # TST1910)
Report #: B7505.01-801-47, Report Date: 03/19/2012
Report #: B7505.03-801-47, Report Date: 06/21/2012
2. Certification Agency
Fenestration and Glazing Industry Alliance (formerly AAMA)
(FBC Organization #: CER1498)

Installation:

Refer to Installation Instructions (**CRF026**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**CRF026**) for design pressures based on size, configuration, and glass types.