



398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Product Evaluation Report

of

**Windsor Windows and Doors
Pinnacle Clad Double Hung Window
(HVHZ) (Impact)**

for

Florida Product Approval

FL# 11092

Report No. 6954

Current Florida Building Code

Method:	1 – A (Certificate)
Category:	Windows
Sub – Category:	Double Hung
Product:	Pinnacle Clad Double Hung Window
Material:	Wood
Cladding:	Aluminum 6063-T5
Product Dimensions:	See Installations Details WWD052

Prepared for:


**Windsor Windows and Doors
900 S. 19th Street
West Des Moines, IA 50265**

Prepared by:

Hermes F. Norero, P.E.

Florida Professional Engineer # 73778

Date: 03/08/2023

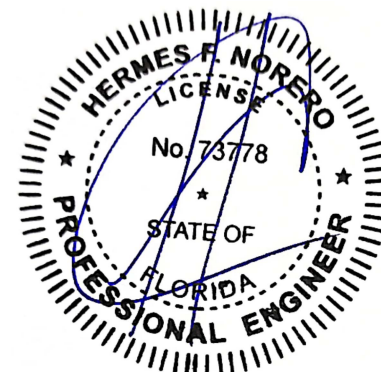

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2023.08.09 16:49:17 -04'00'

Contents:

Evaluation Report Pages 1 – 3

 954.399.8478

 954.744.4738

 BUILDINGDROPS.COM

 CONTACT@BUILDINGDROPS.COM

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Manufacturer: Windsor Windows and Doors

Product Category: Window

Product Sub-Category: Double Hung

Compliance Method: State Product Approval Method (1)(a)

Product Name: Pinnacle Clad Double Hung Window (HVHZ) (Impact)

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Windsor Windows and Doors** based on Method 1(a) of the State of Florida Product Approval, Florida Department of Business & Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **WWD052**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and does not require an impact resistant covering.
4. Site conditions that deviate from the details of drawing **WWD052** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **WWD052** for size and design pressure limitations.

398 E DANIA BEACH BLVD. SUITE 338, DANIA BEACH, FL 33004

Certification Agency: The manufacturer has demonstrated compliance of products in accordance with the Florida Building Code for manufacturing under a program audited by and approved by **Window and Door Manufacturers Association** (FBC Organization #: CER1508).

Performance Standards: The product described herein has been tested per:

- ASTM E 1886-13a
- ASTM E 1996-14a
- TAS 201-94
- TAS 202-94
- TAS 203-94

Referenced Data:

1. Product Testing performed by **Element Materials Technology**.
(FBC Organization # TST9610)
Report #: ESP031842P ASTM, Report Date: 08/26/19
Report #: ESP031842P DADE, Report Date: 08/26/19
TAS Test Reports Signed and Sealed by Jason R. Steen FL P.E. No. 67814
2. Certification Agency
Window and Door Manufacturers Association
(FBC Organization #: CER1508)
3. Material Certification
Miami-Dade County Notice of Acceptance
Eastman Chemical Company
Sayflex PVB Interlayer

Installation:

Refer to Installation Instructions (**WWD052**) for details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**WWD052**) for design pressures related to different sizes and configurations.