

Manufacturer: **Provia, LLC.**
 2150 State Route 39 West
 Sugarcreek, OH 44681


Product Line: 6'8 Heritage Fiberglass Opaque IS/OS Door – Large Missile Impact

Compliance:

The product listed herein complies with requirements of the Florida Building Code.

Supporting Technical Documentation:

1. Approval document: drawing number 08-01362, Revision F, prepared, signed and sealed by Luis Roberto Lomas P.E.
2. Test Report NCTL-210-3358-1 signed and sealed by Gerard J. Ferrara, P.E.
National Certified Testing Laboratories, Orlando, FL
ASTM E1886/ E1996 Large Missile Impact, Level D, Wind Zone 4
 Cyclic Load Test, ± 85.0 psf design pressure
ASTM E330 Design Pressure ± 85.0 psf.
3. Test Report NCTL- 210-3105-1 signed and sealed by Gerard J. Ferrara, P.E.
National Certified Testing Laboratories, Orlando, FL
TAS 201/ TAS 203 Large Missile Impact Test, Level D, Wind Zone 4
 Cyclic Pressure loading $+50.5/-55.0$ psf (IS), $+55.0/-50.5$ psf (OS) design pressure
TAS 202 Uniform Static Air Pressure, $+50.5/-55.0$ psf (IS), $+55.0/-50.5$ psf (OS) design pressure, 2.86psf (IS),
6.0psf (OS),
8.25psf (OS – High Dam Threshold) water penetration.
4. Test Report NCTL-210-3314-1A signed and sealed by Gerald J. Ferrara, P.E.
National Certified Testing Laboratories, Orlando, FL
ASTM E1886/ E1996 Large Missile Impact, Level D, Wind Zone 4
 Cyclic Load Test, ± 50.0 psf, $+55.0/-50.5$ psf (OS Opaque) design pressure.
ASTM E330: Design Pressure ± 50.0 psf.
5. Test Report CTLA-772W, signed and sealed by Ramesh Patel, P.E.
Certified Testing Laboratories, Orlando, FL.
ASTM E330 Design Pressure: ± 70.0 psf
Water penetration resistance: 10.5psf
6. Test Report CTLA-805W-2, signed and sealed by Ramesh Patel, P.E.
Certified Testing Laboratories, Orlando, FL.
ASTM E330 Design Pressure: ± 70.0 psf (OS)
 ± 55.0 psf (OS)
 ± 60.0 psf (OS)
 ± 65.0 psf (IS)
Water penetration resistance: 10.00psf
7. Test Report TEL 03851468, signed by William B. Shelton, P.E.
TAS 201/ TAS 203 Large Missile Impact Test, Level D, Wind Zone 4
 Cyclic Pressure loading ± 60.0 psf design pressure
TAS 202 Uniform Static Air Pressure, ± 60.0 psf design pressure, 9.0psf water penetration.
8. Test report P3503.02-501-47 signed by Stephen D. Shank
Intertek, Pittsburgh, PA
(For PanoLock Multi Point)
ASTM E330 Design pressure, ± 50.13 psf
9. Anchor calculations, report number 511979-1B, prepared, signed and sealed by Luis Roberto Lomas P.E.
10. Comparative analysis, report number 511679-2, prepared, signed and sealed by Luis Roberto Lomas P.E.
11. Evaluation and comparative analysis for alternate sills, report numbers 514581, prepared, signed and sealed by Luis Roberto Lomas P.E.
12. Evaluation and comparative analysis, report number 514394, prepared, signed and sealed by Luis Roberto Lomas P.E.

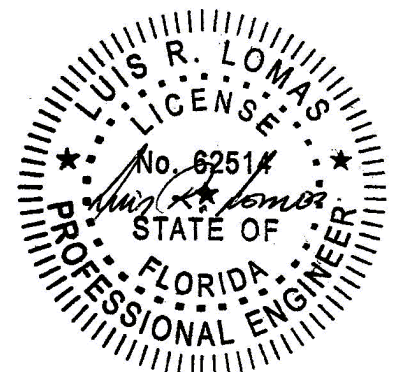

Limitations and Conditions of use:

- o Maximum design pressure: See installation instructions.
- o Approved configurations: See installation instructions.
- o Door panel size: 35 3/4" x 79 1/4"
- o Sidelite panels to be glazed per ASTM E1300 according to glazing details in approval drawing.
- o This product is not rated to be used in the HVHZ.
- o This product is impact resistant and does not require impact protection in wind borne debris regions.
- o Door frame material: Wood G.46 minimum or Framesaver or Fusion Frame.
- o Door panel material to be Fiberglass with wood side stiles and top and bottom rails.
- o Approved lock hardware:
 - o Schlage F-Series door knob with Schlage F-Series deadbolt.
 - o Schlage F-Series door knob with Schlage B-Series deadbolt.
 - o Emtek Residential Grade door hardware assembly.
 - o Trilennium Multi-Point Lock Handle Assembly.
 - o Panolock multipoint lockset.

Installation:

Units must be installed in accordance with manufacturer's installation instructions and approval document, 08-01362, Revision F.

Certification of Independence:

Please note that I do not have nor will acquire a financial interest in any company manufacturing or distributing the product(s) for which this report is being issued. Also, I do not have nor will acquire a financial interest in any other entity involved in the approval process of the listed product(s).

