

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION 11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

Eastman Chemical Company (MA) 730 Worcester Street Springfield, MA 01151

### SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

#### **DESCRIPTION:** Saflex Clear and Color Glass Interlayers

**APPROVAL DOCUMENT:** Drawing No. **1813**, titled "Saflex Based Interlayers for Laminated Glass" sheets 1 through 3 of 3, dated 04/06/2012, prepared by W. W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

#### **MISSILE IMPACT RATING: None**

**LABELING:** Glass laminated under this product approval shall be permanently marked in a corner of the glass with: a) **Saflex**, b) Authorized laminator's name, c) M.D.C.A. that stands for Miami Dade County Approved and d) Markings required by federal law for safety glazing.

# LIMITATION: This approval does not include an evaluation of structural performance of this component.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews NOA # 14-0423.17 and consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by Carlos M. Utrera, P.E.



103/09/2016

NOA No. 15-1201.11 Expiration Date: May 21, 2021 Approval Date: March 17, 2016 Page 1

## NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

#### A. DRAWINGS "Submitted under NOA # 12-1231.10"

1. Drawing No. 1813, titled "Saflex Based Interlayers for Laminated Glass" sheets 1 through 3 of 3, dated 04/06/2012, prepared by W. W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E.

### B. TESTS "Submitted under NOA # 11-0325.05"

	Test Report No.	Standard	Date	Signature
1.	ETC-11-726-25078.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
2.	ETC-11-726-25076.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
3.	ETC-11-726-25080.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
4.	ETC-11-726-25077.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
5.	ETC-11-726-25079.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
6.	ETC-11-726-24882.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
7.	ETC 96-191-3253.0	ASTM G26 & C158	11/05/97	Joseph L. Doldan, P.E.
8.	ETC 98-191-5523.0	ASTM G26 & C158	05/11/99	Joseph L. Doldan, P.E.
	"Submitted under NO.	4 # 09-0223.05"		
9.	ETC-07-726-20120.0	ASTM D2843	07/17/08	Joseph L. Doldan, P.E.
10.	ETC-07-726-20120.0	ASTM D1929	07/17/08	Joseph L. Doldan, P.E.
11.	ETC-07-726-20120.0	ASTM D635	07/17/08	Joseph L. Doldan, P.E.
12.	ETC-07-726-20120.0	ASTM C158	07/17/08	Joseph L. Doldan, P.E.

## C. CALCULATIONS:

1. None.

#### D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

### E. MATERIAL CERTIFICATIONS

#### 1. None.

#### F. STATEMENTS "Submitted under NOA # 14-0423.17"


 Statement letter of code conformance to 2010 and 5<sup>th</sup> edition (2014) FBC, issued by W. W. Schaefer Engineering & Consulting, P.A., dated 04/10/2014, signed and sealed by Warren W. Schaefer, P.E.

#### "Submitted under NOA # 11-1102.11"

2. No financial interest letter issued by W. W. Schaefer Engineering & Consulting, P.A., on 10/24/2011, signed and sealed by Warren W. Schaefer, P.E.

03/09/2016

Carlos M. Utrera, P.E. Product Control Examiner NOA No. 15-1201.11 Expiration Date: May 21, 2021 Approval Date: March 17, 2016

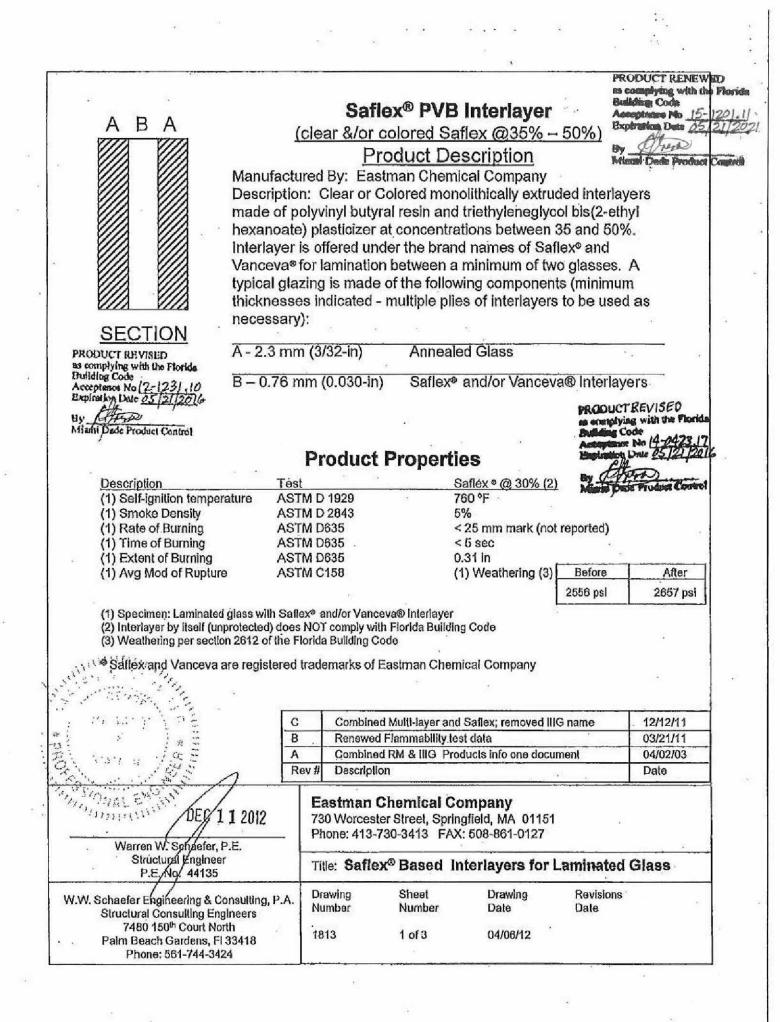

#### Saflex® PVB Interlayer continued

+ 280.

PRODUCT RENEWED a Mo Product Control Miami Dade

F\$ .

# Saflex® Multi-layer Product Properties

Footnote Description Test **Dade County** Saflex Multilayer Series Criteria (2) ASTM D 2843 Passed (<75%) 26.6% (1) Test for Smoke Densily ASTM D 1929 Passed (>650°F) 750°F (1) Self Ignition Temperature Passed (C-1:<1.0 ----(1) Rate of Burning ASTM D 635 in/min) Average Time of Burning **ASTM D 635** ----< 5 sec. (1) (1) Average Extent of ASTM D 635 0.51 in Burning Passed (<10.0%) Delta:4.9% (1) & (3) Average Modulus of ASTM C 158 Rupture Before: 3842 psi After: 4042 psi

(1) Specimen: Laminated glass with Saflex® Multi-Jayer interlayer

(2) Interlayer by Itself (unprotected) does NOT comply with Florida Building Code
(3) Weathering per section 2612 of the Florida Building Code

# Saflex® and Vanceva® Solar/Color and Colorant Properties

Material Designation	Smoke Density Rating ASTM D 2843	Dade No	Dade Notification #       ETC-11-726-25079.0       ETC-11-726-25076.0       ETC-11-726-25080.0       ETC-11-726-25077.0	
Vanceva @ & Saflex@ - Clear	5%	ETC-11-		
Vanceva @ & Saflex@ - While	20%	ETC-11-		
Vanceva @ & Saflex@ Black	2%	ETC-11-		
Vanceva @ & Saflex@ Blue	. 5%	ETC-11-		
Vanceva ® & Sallex® - Yellow	9%	ETC-11-	ETC-11-726-25079,0	
Vanceva ® & Saflex® – Red	10% ETC-1		-726-24882,0	
	Ehefiding Accepta Esipirati	Den 05/21/2016	Building Code	
BEC 1 1 2012 MAL Warren-W. Schaefer P.E.	Elwfiding Accepta Elipiath By L	Code The No. 14-0423.17 Dec 25/21/2016 Auge The Product Control mpany field, MA 01151	by control vise with the Florid	
MELLI 1 2012	Eastman Chemical Co 730 Worcester Street, Spring	Code The No. 14-0423.17 Due 05/21/2016 Autor The Product Control mpany field, MA 01151 508-861-0127	es complying with the Florid Building Code Acceptence No <u>12-1231.11</u> Expiration Date <u>05/21/20</u> By <u>1200</u> Mining Dede Product Control	
Warren W. Schaefer, P.E.	Eastman Chemical Co 730 Worcester Street, Spring Phone: 413-730-3413 FAX:	Code The No. 14-0423.17 Due 05/21/2016 Autor The Product Control mpany field, MA 01151 508-861-0127	es complying with the Florid Building Code Acceptence No <u>12-1231.1</u> Expirative Date <u>05/21/20</u> By <u>1200</u> Mining Dede Product Control	

#### Saflex® PVB Interlayer continued

Saftex® interlayers are known as Saftex, Saflex colors, Saflex Multi-layer, SilentGlass Technology™ and Vanceva® Color

Vanceva and/or Saflex are known as: AR,CL,DA through DZ,,MG,NA,RA through RZ, SA through SZ, and VA through VZ. (e.g.: RB41, NA71).

Saflex® Multi-layer interlayers are known as: Q series (QA through QZ) and Silent Glass Technology (e.g.: QB 51, QS 41 etc...).

Saflex and Vanceva are registered trademarks of Eastman Chemical Company <sup>7/8</sup> Silent Glass Technology is a trademark of Eastman Chemical Company

This is a component approval and does not include an evaluation of structural performance of this component. Systems incorporating this component shall apply for an NOA to the Miami-Dade Product Control and shall submit test reports and other required documents showing that the systems using this component will resist the loads according to chapter 16 of the F.B.C. A list of authorized laminators shall be filed with Miami-Dade County by Eastman Chemical Company

as compl Building Acceptar Expiratio By	CT RENEWED ying with the Florid Code tes No <u>15-1201,11</u> a Diate <u>25/21/20</u> Affected ade Product Control	Building Cod Acception 1 21 Bioplantice D By	with the Horida No 14-0423.17	PRODUCT REVISED as complying with the Florida Fullding Code Acceptance No 12-12-31-10 Expiration Date 05/2112/2014 By Numi Bade Product Control
DEC 112012 Warren W. Schaefer, P.E.	Eastman Chemical Company 730 Worcester Street, Springfield, MA 01151 Phone: 413-730-3413 FAX: 508-861-0127			
Structural Engineer P.E. No: 44135	Title: Saflex®	IIIG Based	Interlayers	for Laminated Glas
W.W. Schaefer Engineering & Consulting, P.A. Structural Consulting Engineers 7480 150th Court North	Drawing Number	Sheet Number	Drawing Date	Revisions Date
Palm Beach Gardens, FI 33418 Phone: 561-744-3424	1813	3 of 3	04/06/12	