

STRUCTURAL SOLUTIONS, P.A.*

Structural Engineering ■ Investigations ■ Consulting

GARAGE DOOR EVALUATION REPORT

Garage Door No.:	IBC-2410-130-15	Test Date:	4/22/2014	Project No.:	12-088
Design Pressures:	+24.1 psf, -28.1 psf	Report Date:	11/3/2020	Model #	2400
Test Pressures:	+36.2 psf, -42.2 psf	Test Location:	Entrematic, Winston-Salem, NC		
ASCE 7-16 Criteria:	Up to 5 Feet of Door Width in Zone 5; Roof Slope ≤ 10°; Enclosed Building				
	Exp. B, 30' MRH	Exp. C, 15' MRH	Exp. C, 25' MRH	Exp. D, 15' MRH	Exp. D, 25' MRH
	168 mph	152 mph	145 mph	138 mph	133 mph

Reference Test Report and Drawing:

- Structural Solutions, P.A.* Garage Door Static Pressure Test Report for IBC-2410-130-15 dated 11/03/2020
- Entrematic Drawing number IBC-2410-130-15 dated 9/6/2012

Description of Test Specimen:

10'-2"x8'-0" Model 2400, 24 ga steel garage door as shown in drawing IBC-2410-130-15.

Test Standards and Report Conclusion:

The above referenced Test Report states the following:

- The tests were conducted in accordance with ASTM E330 and DASMA 108.
- The test was witnessed and certified by Thomas L. Shelmerdine, PE (FL PE# 48579)
- The test facility at Entrematic is accredited by the American Association for Laboratory Accreditation, Certificate #2595.01.


Summary:

The 10'-2"x8'-0" Model 2400 as described on drawing IBC-2410-130-15 meets or exceeds the testing criteria as described above. By comparison to the construction of the 10'-2"x8'-0" Model 2400, the following doors also meet or exceed the above testing criteria, when constructed in accordance with drawing IBC-2410-130-15:

- 10'-2" x 8'-0" Model 2000 doors (which are constructed of thicker 20 gauge steel in lieu of 24 gauge steel)
- Model 2000 and 2400 doors with widths up to 10'-2" and heights up to 24'-0"
- 3 windows may be installed in 1 section (21 5/8" x 9 5/8" x 0.080" plexiglass, or 21 3/8" x 3 1/4" x 1/8" DSB)

To the best of my knowledge, the above garage door conforms to the requirements of the Florida Building Code 7th Edition (2020).

Submitted By:

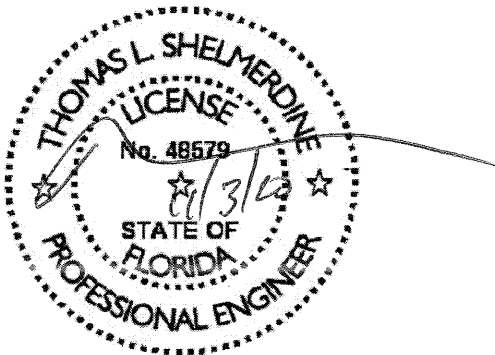

STRUCTURAL SOLUTIONS, P.A.* (*Florida: dba Structural Solutions of North Carolina, Inc., Firm #29412)

Thomas L. Shelmerdine, PE (NC PE #14654; Florida PE #0048579)

5921-G West Friendly Avenue ■ Greensboro, North Carolina 27410 ■ (336) 856-2686 ■ www.sspa.biz ■ NC Firm #C-1096