

Product Evaluation Report

Report No.: FL-18385.1

Date: August 3, 2020

Product Category	Sub Category	Manufacturer	Product Name
Exterior Doors	Exterior Door Components	H M Sure Rock 15759 Tapia St. Irwindale, CA 91706 Phone 626.377.1154	Sure Jamb Composite Door Jamb Inswing / Outswing "Impact"

Scope: Product Evaluation report issued by R W Building Consultants, Inc. & Lyndon F. Schmidt, P.E. (System ID # 1998) for Associated Materials Inc., based on Rule Chapter No. 61G20-3, Method 1D of the State of Florida Product Approval, Dept. of Business & Professional Regulation.

RW Building Consultants and Lyndon F. Schmidt, P.E. do not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

Limitations:

1. This product has been evaluated and is in compliance with the 7th Edition (2020) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets level "D" and includes Wind Zone 4 as defined in ASTM E1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
4. This "IMPACT" door jamb, as a component, is to be used as a substitute to a similar door jamb in an impact approval (complies with FBC Sections 1609.1.2 & R301.2.1.2) door system possessing a current Florida Statewide Product Approval.
5. The design pressure of the assembly shall be the lesser of the design pressure for the door jamb shown in this approval or the design pressure of the door assembly used in conjunction with this approval.
6. The maximum frame size of the door assembly shall be lesser of the maximum frame size stated in this approval or the maximum frame size of door assembly approval used in conjunction with this approval.
7. Site conditions that deviate from the details of this drawing require further engineering analysis by a license engineer or registered architect.
8. See drawing FL-18385.1 for size and design pressure limitations.

Supporting Documents:


1. **Test Report No.**
TEL 04601399
Test Standard
ASTM E330-02
ASTM E1886-05 / E1996-09
2. **Drawing No.**
No. FL-18385.1
Prepared by
RW Building Consultants, Inc. (#9813)
3. **Calculations**
Product Anchoring
Prepared by
RW Building Consultants, Inc. (#9813)
4. **Quality Assurance**
Certificate of Participation issued by National Accreditation & Management Institute, Inc., certifying that H M Sure Rock, is manufacturing products within a quality assurance program that complies with ISO/IEC 17020 and Guide 53

Testing Laboratory
Testing Evaluation Lab., Inc.

Signed by
V.K.Wright

Signed & Sealed by
Lyndon F. Schmidt, P.E.

Signed & Sealed by
Lyndon F. Schmidt, P.E.

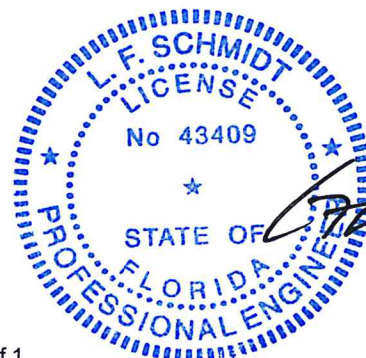

Lyndon F. Schmidt, P.E.
FL PE No. 43409
8/3/2020