



# BUILDING DROPS

A Perfect Solution in Every Drop

Certificate of Authorization: 29578

398 E. Dania Beach Blvd.  
Suite 338  
Dania Beach, FL 33004  
954.399.8478 PH  
954.744.4738 FX  
contact@buildingdrops.com

## Product Evaluation Report

*of*

**Continental Glass System, LLC.**

**Series 10000 Glazed Aluminum Inswing Door - LMI**

*for*

**Florida Product Approval**

**FL# FL20513**

**Report No. 4471**

**Current Florida Building Code**

**Method: 1 – A (Certificate)**  
**Category: Exterior Doors**  
**Sub – Category: Swinging Exterior Door Assemblies**

**Product: Series 10000 Glazed Aluminum Inswing Door**  
**Material: Aluminum**  
**Product Dimensions: Max 86” x 144”**


**Prepared For:**  
**Continental Glass Systems, LLC.**  
**325 West 74 Place**  
**Hialeah, FL 33014**

**Prepared by:**  
**Hermes F. Norero, P.E.**  
Florida Professional Engineer # 73778  
Date: 08/25/2016

Contents:

Evaluation Report Pages 1 – 4

Digitally signed by Hermes F. Norero, P.E.  
Reason: I am approving this document  
Date: 2016.08.25 17:18:51 -04'00'

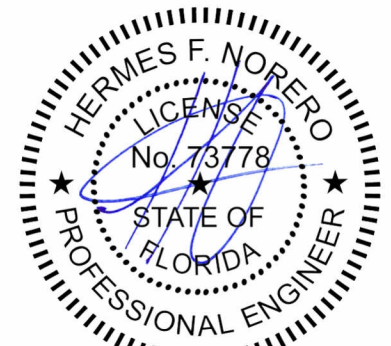

Hermes F. Norero, P.E.  
Florida No. 73778



# BUILDING DROPS

A Perfect Solution in Every Drop

Certificate of Authorization: 29578

FL# **FL20513**  
Date: 08/25/2016  
Report No: 4470

---

**Manufacturer:** Continental Glass Systems, LLC.

**Product Category:** Exterior Doors

**Product Sub-Category:** Swinging Exterior Door Assemblies

**Compliance Method:** State Product Approval Method (1)(a)

**Product Name:** Series 10000 Glazed Aluminum Inswing Door - LMI  
(Impact)  
Max 86" x 144"

**Scope:** This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Continental Glass Systems, LLC.** based on Method 1a of the State of Florida Product Approval, Florida Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **SDR-1000-LM-IS**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

## Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code for Large Missile Impact and does not require an impact resistant covering.
4. Site conditions that deviate from the details of drawing **SDR-1000-LM-IS** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **SDR-1000-LM-IS** for size and design pressure limitations.

Hermes F. Norero, P.E.  
Florida No. 73778  
Page 2 of 4



# BUILDING DROPS

A Perfect Solution in Every Drop

Certificate of Authorization: 29578

**FL# FL20513**  
Date: 08/25/2016  
Report No: 4470

**Certification Entity:** The manufacturer has demonstrated compliance of products in accordance with the applicable Florida Building Code requirements for product certification and quality assurance through **National Accreditation & Management Institute, Inc.** (FBC Organization #: CER1773).

**Performance Standards:** The product described herein has been tested per:

- TAS 201-94
- TAS 202-94
- TAS 203-94

**Referenced Data:**

1. Product Testing performed by **Blackwater Testing Inc.**  
(FBC Organization # TST10394)  
Report #: BT-CON-16-001      Report Date: 06/30/2016
2. Product Testing performed by **Fenestration Testing Laboratory, Inc.**  
(FBC Organization # TST1657)  
Report #: #5567      Report Date: 08/20/2008  
Report #: #6132      Report Date: 02/16/2010
3. Certification Agency  
**National Accreditation & Management Institute**  
(FBC Organization #: CER1773)
4. Material Certification  
**Miami-Dade County RER-Product Control Section NOA**  
SentryGlas Interlayer by Kuraray America, Inc.
5. Material Certification  
**Miami-Dade County RER-Product Control Section NOA**  
Saflex CP Interlayer by Eastman Chemical Co.



# BUILDING DROPS

A Perfect Solution in Every Drop

Certificate of Authorization: 29578

FL# **FL20513**  
Date: 08/25/2016  
Report No: 4470

**Installation:** 1. Approved anchor types and substrates are as follows:

**Through Frame Installation:**

- A. For wood substrate use **(1) #14 Wood Screw** type anchor per location of sufficient length to achieve minimum embedment of 1.5" into wood.
- B. For concrete substrate where one by (1X), non-structural, wood bucking is employed, use **(1) 5/16" diameter Elco UltraCon** concrete screw anchor per location of sufficient length to achieve minimum embedment of 1.75" into concrete.
- C. For concrete substrate where wood bucking is NOT employed, use **(1) 5/16" diameter Elco UltraCon** type concrete screw anchors per location of sufficient length to achieve minimum embedment of 1.75" into concrete.
- D. For steel substrate, use **(1) #14 Grade 5 Self-Tapping or Self-Drilling SMS** type anchor per location of sufficient length to achieve minimum three threads of penetration beyond steel structure.

Refer to Installation Instructions (**SDR-1000-LM-IS**) for anchor spacing and more details of the installation requirements.

**Design Pressure:**

<b>With Transom:</b>	<b>+90 / -90 psf</b>
<b>Without Transom:</b>	<b>+110 / -110 psf</b>