

Manufacturer: Nan Ya Plastics Corporation U.S.A.
8989 North Loop East, Suite 800
Houston, TX 77029

Product Line: Series Entry Door Inswing Fiberglass Inswing Side-Hinged Door, Non-Impact

Compliance:


The product listed herein complies with requirements of the current Florida Building Code.

Supporting Technical Documentation:

1. Approval document: drawing number 08-03306 Revision F, prepared, signed and sealed by Luis Roberto Lomas P.E.
2. Test report No.: NCTL-210-4103-10 signed by Christopher Bennett
National Certified Testing Laboratories, Orlando, FL.
AAMA/WDMA/CSA 101/I.S.2/A440
Design pressure: ±50.0psf
Water penetration resistance 6.0psf
3. Report No.: NCTL 210-4103-07 Rev. 4 signed by Christopher Bennett
AAMA/WDMA/CSA 101/I.S.2/A440
CSA A440S1-09
Design pressure: ±50.0psf
Water penetration resistance 7.5psf
4. Report No.: FTL 6718 signed and sealed by Mr. Marlin D. Brinson, P.E.
Fenestration Testing Laboratory, Inc., Medley, FL
AAMA/WDMA/CSA 101/I.S.2/A440
Design pressure: ±50.0psf
Water penetration resistance 7.5psf
5. Test report No.: NCTL 210-3893-2 signed and sealed by Gerard J. Ferrara P.E.
National Certified Testing Laboratories, Orlando, FL
TAS 202 Uniform Static Air Pressure, ±50.0psf design pressure, 7.50psf water penetration.
6. Test report No.: 2598T0003 signed by Timothy Efaw
PRI Construction Materials Technologies LLC, Tampa, FL.
AAMA/WDMA/CSA 101/I.S.2/A440
Design pressure: ±50.13psf
7. Report No.: 2598T0004 signed by Timothy Efaw
PRI Construction Materials Technologies LLC, Tampa, FL
AAMA/WDMA/CSA 101/I.S.2/A440
Design pressure: ±50.13psf
8. Report No.: 2598T0005 signed by Timothy Efaw
PRI Construction Materials Technologies LLC, Tampa, FL
AAMA/WDMA/CSA 101/I.S.2/A440
Design pressure: ±50.13psf
9. Anchor calculations and comparative analysis, report number 514291-1C, prepared, signed and sealed by Luis Roberto Lomas P.E.

Limitations and Conditions of use:

- Design pressure: Refer to approval document
- Panel size: 35 3/4" x 79 1/4"
- Units must be glazed per ASTM E1300, with safety glazing.
- This product is not rated to be used in the HVHZ.
- This product is not impact resistant and requires impact protection in wind borne debris regions.
- Frame material to Composite.

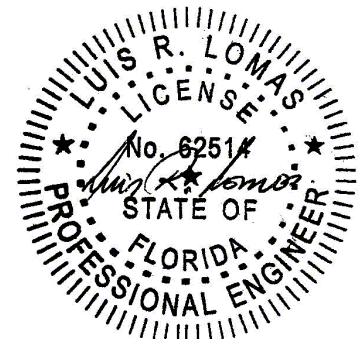

L. Roberto Lomas P.E.

208 7TH Ave

Indialantic, FL 32903

434-688-0609

rlomas@lrlomaspe.com

Engineering Evaluation Report

Report No.: 514291F

Installation:

Units must be installed in accordance with manufacturer's installation instructions and approval document 08-03306, Revision F.

Certification of Independence:

Please note that I do not have nor will acquire a financial interest in any company manufacturing or distributing the product(s) for which this report is being issued. Also, I do not have nor will acquire a financial interest in any other entity involved in the approval process of the listed product(s).

