

W. W. Schaefer Engineering & Consulting, P.A. (CA #6809)

7480 150th Court North
Palm Beach Gardens, FL 33418
Phone (561)744-3424

ENGINEER'S EVALUATION REPORT #WWS-344A

Prepared for:

Pella Corporation
8291 Forshee Drive; Unit 4
Jacksonville, FL 32219
Phone: 904-632-7400

Prepared by:

Warren W. Schaefer, P.E.
Florida Professional Engineer #44135

Manufacturer: Pella Corporation

Product Category: Doors

Evaluation Method: 1-D (Engineer's evaluation)

Product model & name: Pella Non-Impact Aluminum Interior Stacking Multi-slide Doors

Documents that must accompany this report:

1. W. W. Schaefer Engineering & Consulting drawing No. 1953A

Door size & configuration restrictions and assembly requirements:

See drawing No. 1953A for size & configuration restrictions. Unless noted otherwise, door assembly is the full responsibility of each the manufacturer and their applicable quality assurance and shall be quality assured in accordance with the here-in referenced test reports.

Maximum allowable design pressure:

See drawing No. 1953A

Installation requirements:

See drawing No. 1953A

Code compliance:

Code section(s) considered with this evaluation:

FBC Chapters 17 & 24

Glass:

All glass meets the current ASTM E1300 standard.

Mullions:

Not applicable to this evaluation.

Test Standards applicable to the testing of these doors:

TAS-202

Test Laboratory: Element Material Technology

Test report numbers: ESP030193P

Note: All HVHZ test reports have been signed & sealed by a Florida PE.

Compliance statement:

This product & its installations have been evaluated as required by the applicable Florida product approval rule and the Florida Building Code (FBC) and are found to be in compliance with each the rule, the Florida Building Code & all code required standards referenced here-in.


General report notes & system limitations:

1. All size, configuration & installation conditions shown in this report and the referenced drawing No. 1953A are based off the referenced test reports and/or engineering analysis in accordance with the Florida Building Code.
2. Doors shall be constructed in accordance with the descriptions in this report, and the manufacturer's state approved quality assurance entity specifications.
3. This product is approved for use in & outside of the High Velocity Hurricane Zones (HVHZ).
4. Job required design wind pressure shall be calculated in accordance with the Florida Building Code Chapter 16 and ASCE 7 Minimum Design Loads for Buildings and Other Structures (0.85 directionality factor may apply per the current ASCE 7 standard).
5. These doors are non-impact rated & must be shuttered with a Florida code approved shutter where required by code.
6. Any change to this product's components and/or assembly without the knowledge & consent of W. W. Schaefer Engineering & Consulting, P.A. and Warren W. Schaefer, P.E. shall void this evaluation/certification and thus the products Florida approval.

Quality Assurance Entity: Keystone Certifications, Inc.

Disclaimers:

1. The parts, components, assembly & performance of this product, and liability there-of are the sole responsibility of the manufacturer and their quality assurance and shall be as tested unless stated otherwise in this evaluation report or the uploaded approval drawing No. 1953A. Neither W. W. Schaefer Engineering & Consulting, P.A. nor Warren W. Schaefer, P.E. claim any responsibility for said parts, components, assembly or performance and shall be deemed responsible only for the evaluation of the product as stated here-in.

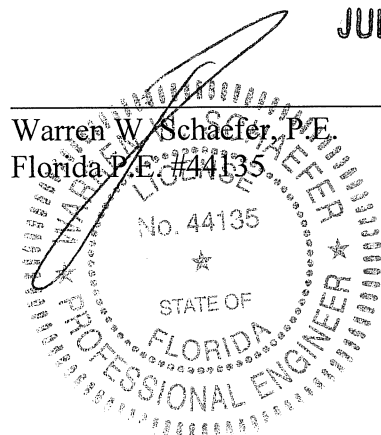

JUL 08 2019