



1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Product Evaluation Report

of

**Euro-Wall, LLC
MS-Multislide System - PG70
(HVHZ) (Impact)**

for

Florida Product Approval

FL# FL34003

Report No. 9841

Current Florida Building Code

Method:	1 – D (Engineering Evaluation)
Category:	Exterior Doors
Sub – Category:	Sliding Exterior Door Assemblies
Product:	MS-Multislide System - PG70
Materials:	Aluminum 6063-T5
Product Dimensions:	See Installation Instructions, EWS051

Prepared for:


**Euro-Wall, LLC
P.O. Box 8007
North Port, FL 34290**

Prepared by:

Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 04/22/2025

Contents:

Evaluation Report Pages 1 – 3

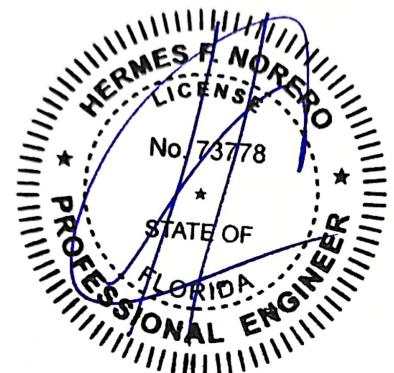

Hermes F. Norero, P.E.
Florida No. 73778

Manufacturer: Euro-Wall, LLC

Product Category: Exterior Doors

Product Sub-Category: Sliding Exterior Door Assemblies

Compliance Method: State Product Approval Method (1)(d)

Product Name: MS-Multislide System - PG70
(HVBZ) (Impact)

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Euro-Wall, LLC** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **EWS051**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **including** the "High Velocity Hurricane Zone" (HVBZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does not require** an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **EWS051** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **EWS051** for size and design pressure limitations.

Quality Assurance: The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **National Accreditation and Management Institute**.
(FBC Organization # QUA1789)

Performance Standards: The product described herein has been evaluated per:

- ASTM E283-19
- ASTM E330-14
- ASTM E547-00(16)
- ASTM F842-17
- TAS 201-94
- TAS 202-94
- TAS 203-94

Referenced Data:

1. Product Testing performed by **Blackwater Technical Services Inc.**
(FBC Organization # TST10394)
Report #: BT-EUW-19-001, Report Date: 09/12/2019
TAS report signed and sealed by Constantin Bortes, FL P.E. No. 77915

Report #: BT-EUW-20-003, Report Date: 12/17/2020
Report #: BT-EUW-20-003B, Report Date: 02/03/2021
Report #: BT-EUW-22-001, Report Date: 06/30/2023
TAS reports signed and sealed by Michael D. Caldwell, FL P.E. No. 49979
2. Product Testing performed by **IFET Inc.**
(FBC Organization # TST14775)
Report #: TR-IFET-25-0011, Report Date: 04/16/2025

Installation:

Refer to Installation Instructions (**EWS051**) for anchor spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**EWS051**) for design pressures based on size, configuration, and glass types.