



BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

398 East Dania Beach Blvd.
Suite 338
Dania Beach, FL 33004
954.399.8478 PH
954.744.4738 FX
contact@buildingdrops.com

Product Evaluation Report

of

Domadeco Corporation
Opaque Exterior Inswing Door
(HVHZ) (Impact)

for

Florida Product Approval

FL# FL37179

Report No. 7402

Current Florida Building Code

Method: 1 – A (Certificate Method)
Category: Exterior Doors
Sub – Category: Swinging Exterior Door Assemblies

Product: Opaque Exterior Inswing Door
Material: Steel
Product Dimensions: See Installation Instructions, DOM004

Prepared for:

Domadeco Corporation
7455 Arroyo Crossing, Suite 220
Las Vegas, Nevada, 89113

Prepared by:

Hermes Norero, P.E.


Florida Professional Engineer # 73778

Date: 12/11/2020

Contents:

Evaluation Report Pages 1 – 3

Digitally signed by Hermes F Norero
Reason: I am approving this document
Date: 2021.01.21 19:16:19 -05'00'

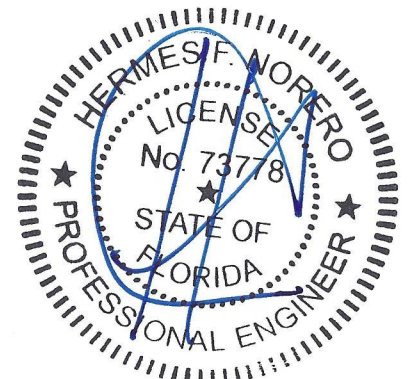

Hermes Norero, P.E.
Florida P.E. No. 73778



BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

FL#: FL37179

Date: 12/11/20

Report No: 7402

Manufacturer: Domadeco Corporation

Product Category: Exterior Doors

Product Sub-Category: Swinging Exterior Door Assemblies

Compliance Method: State Product Approval Method (1)(a)

Product Name: Opaque Exterior Inswing Door (HVHZ) (Impact)

Scope: This is a Product Evaluation Report issued by Hermes Norero, P.E. (FL # 73778) for **Domadeco Corporation** based on Method 1a of the State of Florida Product Approval, Florida Department of Business and Professional Regulation - Florida Building Commission.

Hermes Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the Current Florida Building Code.

See Installation Instructions **DOM004**, signed and sealed by Hermes Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the Current Florida Building Code, including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the Current Florida Building Code and does not require an impact resistant covering.
4. Site conditions that deviate from the details of Installation Instructions **DOM004** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **DOM004** for size and design pressure limitations.



BUILDING DROPS

A Perfect Solution in Every Drop!

Certificate of Authorization: 29578

FL#: FL37179

Date: 12/11/20

Report No: 7402

Certification Agency: The manufacturer has demonstrated compliance of products in accordance with the Florida Building Code for manufacturing under a program audited by and approved quality assurance entity through **National Accreditation and Management Institute** (FBC Organization #: CER1773).

Performance Standards: The product described herein has been evaluated per:

- TAS 201-94
- TAS 202-94
- TAS 203-94
- AAMA/WDMA/CSA 101/I.S.2/A440-17
- ASTM E1886-13
- ASTM E1996-14

Referenced Data:

1. Product Testing
Intertek – Minnesota (ATI)
(FBC Organization #: TST1795)
Report #: L1613.01-201-18, Report Date: 07/31/20
Report #: L1613.02-201-18, Report Date: 07/31/20
Report #: L1613.03-201-18, Report Date: 07/31/20
TAS Report signed and sealed by Daniel C. Culbert, FL PE No. 83035
2. Certification Agency
National Accreditation and Management Institute
(FBC Organization #: CER1773)

Installation:

Refer to Installation Instructions (**DOM004**) for anchors, spacing and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**DOM004**) for allowable sizes and design pressures.