

WOLTERS ENGINEERING

ENGINEERING, DRAFTING, CONSULTING

15211 97th Road N
West Palm Beach, FL 33412
Ph/Fx: (561) 225-1982

PRODUCT EVALUATION

PRODUCT: ABRAMS AAP-N'VEE WALL CLADDING SYSTEM

MANUFACTURER: ABRAMS ARCHITECTURAL PRODUCTS
7260 DELTA CIRCLE
AUSTELL, GA 30166

To all concerned,

The AAP-N'VEE Wall Cladding System, manufactured by Abrams Architectural Products, is fabricated from 6" and 8" extruded aluminum (6063-T5 min) panels. The panels are directly fastened to 5/8" CDX plywood over 16 Ga. metal stud framing (min). The system has been tested per TAS 201, 202, and 203 by Intertek B&C, with results shown in test report N9219.01-550-18.

Technical Documentation:

1. Drawing "AAP-NVE", dated 12/30/22, signed and sealed by Scott Wolters, PE.
2. Test Report listed above by Architectural Testing, Inc. signed and sealed by Tanya Dolby, PE.
3. Supplemental Calculations to support "AAP-NVE", signed and sealed by Scott Wolters, PE.

I have reviewed this submittal per the requirements of FAC Product Approval Rule Chapter 61G20-3.005 (4). Based on the limitations listed below and those provided in the documents above, this product meets all the requirements of the 7th Edition (2020) Florida Building Code generally, and chapters 14, 16, and 20 specifically, including the HVHZ provisions.


Limitations: This Aluminum Panel System is large and small missile impact resistant, and approved for use inside and outside of the HVHZ.

<u>Overall Dimensions:</u>	Maximum Panel Width:	Unlimited
	Maximum Panel Height:	8" (coverage), 8 7/8" (actual)
	Maximum Fastener Spacing:	16" O.C. (at each panel)
	Maximum Design Pressure:	+/- 150 psf


This system is further limited as noted in installation drawing "AAP-NVE"

If you have any questions or need more information concerning this approval please contact me.

Thank you,


Scott Wolters
FL PE# 62354

DEC 30 2022

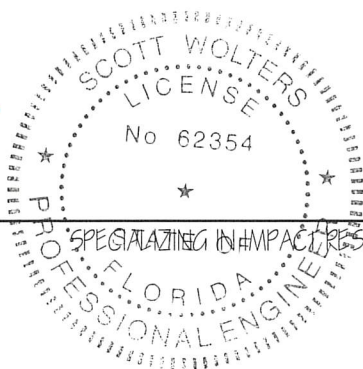

SPECIALIZING IN IMPACT RESISTANT CURTAIN WALLS, STOREFRONTS, & WINDOWS