



1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Product Evaluation Report

of

**Ply Gem Siding Group
EverPlank Horizontal & Vertical Vinyl Siding
(Non-HVHZ)**

for

Florida Product Approval

FL# FL44614

Report No. 9119

Current Florida Building Code


Method:	1 – D (Engineering Evaluation)
Category:	Panel Walls
Sub – Category:	Siding
Product:	EverPlank Horizontal & Vertical Vinyl Siding
Materials:	PVC
Product Dimensions:	See Installation Instructions, PGSG004

Prepared for:

**Ply Gem Siding Group
2405 Campbell Road
Sidney, OH 45365**

Prepared by:

Hermes F. Norero, P.E.
Florida Professional Engineer # 73778
Date: 2/28/2024

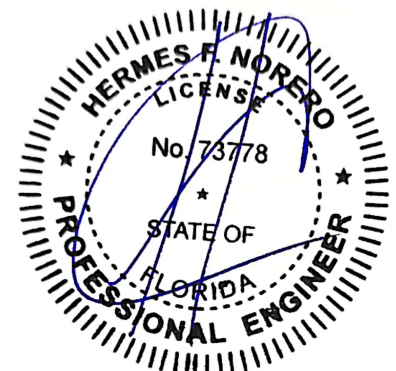

Contents:

Evaluation Report Pages 1 – 3

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2024.02.28 12:36:06 -08'00'

Hermes F. Norero, P.E.
Florida P.E. No. 73778

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Manufacturer: Ply Gem Siding Group

Product Category: Panel Walls

Product Sub-Category: Siding

Compliance Method: State Product Approval Method (1)(d)

Product Name: EverPlank Horizontal & Vertical Vinyl Siding
(Non-HVHZ)

Scope: This is a Product Evaluation Report issued by Hermes F. Norero, P.E. (FL # 73778) for **Ply Gem Siding Group** based on Method 1d of the State of Florida Product Approval, Department of Business and Professional Regulation - Florida Building Commission.

Hermes F. Norero, P.E. does not have nor will acquire financial interest in the company manufacturing or distributing the product or in any other entity involved in the approval process of the product named herein.

This product has been evaluated for use in locations adhering to the current Florida Building Code.

See Installation Instructions **PGSG004**, signed and sealed by Hermes F. Norero, P.E. (FL # 73778) for specific use parameters.

Limits of Use:

1. This product has been evaluated and is in compliance with the current Florida Building Code, **excluding** the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment into substrate material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with Chapter 16 of the current Florida Building Code and **does not require** an impact resistant covering.
4. Site conditions that deviate from the details of installation instructions **PGSG004** require further engineering analysis by a licensed engineer or registered architect.
5. See Installation Instructions **PGSG004** for size and design pressure limitations.

1900 NE MIAMI CT. SUITE 2-15, MIAMI, FL 33132

Quality Assurance: The manufacturer has demonstrated compliance of manufacture of products in accordance with the current Florida Building Code for manufacturing under a quality assurance program audited by an approved quality assurance entity through **Intertek Testing Services NA, Inc. – QA Entity** (FBC Organization #: QUA1673)

Performance Standards: The product described herein has been evaluated per:

- ASTM E84-18(b)
- ASTM D5206-13-19
- ASTM D3679-17
- ASTM D7793-20
- NFPA 268-17

Referenced Data:

1. Product Testing performed by **Architectural Testing, Inc.** (FBC Organization # TST1795)

Report #:	Report Date:
M0157.01-109-40	04/09/21
L1201.01-121-24	01/10/20
N2186.01-109-40	02/08/22
M3739.02-121-24-R0	10/12/21
K3743.01-109-40	01/06/20
M2465.01-10-31-R0	04/21/21
M0157.01-109-40	04/09/21
2. Quality Assurance Agency:
Intertek Testing Services NA, Inc. – QA Entity
(FBC Organization #: QUA1673)

Installation:

Refer to Installation Instructions (**PGSG004**) for anchor types, spacing, and more details of the installation requirements.

Design Pressure:

Refer to Installation Instructions (**PGSG004**) for design pressure configurations.